



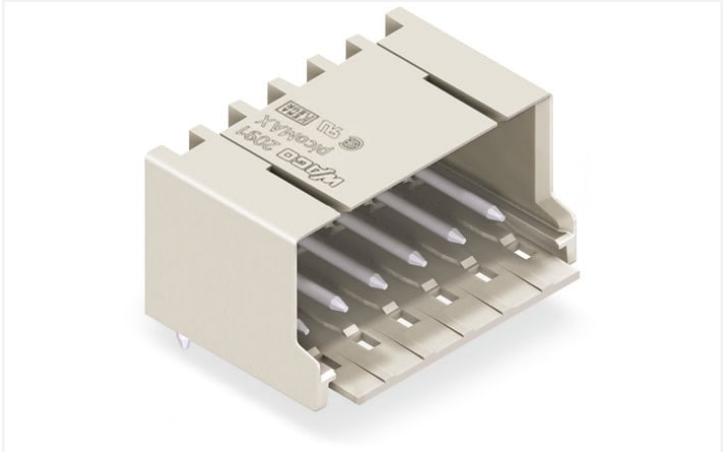


Color: ■ light gray

Similar to illustration

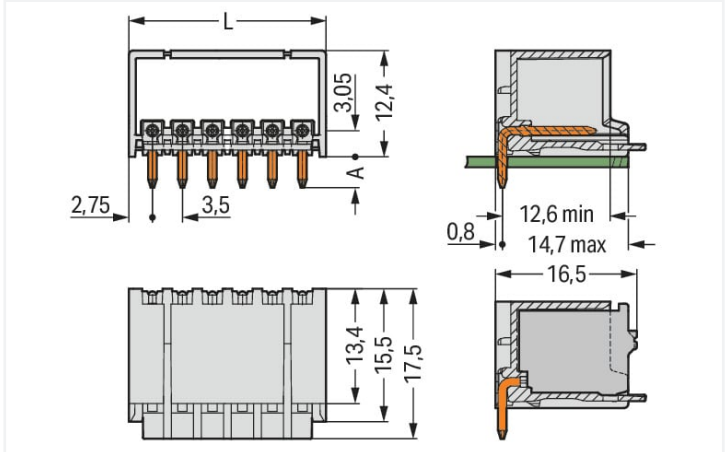

Dimensions in mm
L = (pole no. x pin spacing) + 2.0 mm
A = 3.6 mm THT solder pin
A = 2.4 mm THR solder pin

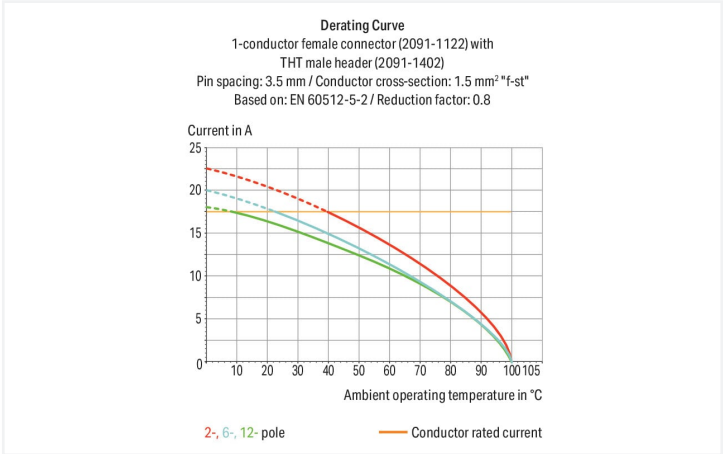

- Assembly of female connectors without loss of poles, allowing different functions to be divided within one male header (≥ 4 poles)
- Coding pins inserted into the header interface prevent mismatching, allowing subsequent coding in panel feedthrough applications
- The female connector is fully shrouded by the male header's housing, providing vibration resistance up to 20 g

Notes

Safety information

Variants:

The **picoMAX® Pluggable Connection System** includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

Direct marking
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

Electrical data						
Ratings per		IEC/EN 60664-1			Approvals per	
					UL 1059	
Overvoltage category		III	III	II	Use group	B C D
Pollution degree		3	2	2	Rated voltage	300 V - 300 V
Nominal voltage		160 V	160 V	320 V	Rated current	10 A - 10 A
Rated surge voltage		2.5 kV	2.5 kV	2.5 kV		
Rated current		10 A	10 A	10 A		



Connection data		
Total number of potentials	3	Connection 1
Number of connection types	1	
Number of levels	1	
		Pole number 3

Physical data		
Pin spacing		3.5 mm / 0.138 inches
Width		12.5 mm / 0.492 inches
Height		16 mm / 0.63 inches
Height from the surface		12.4 mm / 0.488 inches
Depth		17.5 mm / 0.689 inches
Solder pin length		3.6 mm
Solder pin diameter		1 mm
Drilled hole diameter with tolerance		1.2 ^(+0.1) mm

Mechanical data		
Variable coding		Yes
Anti-rotation protection		Yes

Plug-in connection		
Contact type (pluggable connector)		Male connector/plug
Connector (connection type)		for PCB
Mismating protection		No
Plugging without loss of pin spacing		Yes
Mating direction to the PCB		0 °
Locking of plug-in connection		Locking latch

PCB contact		
PCB contact		THT

Material data		
Note (material data)		Information on material specifications can be found here
Color		light gray
Material group		I
Insulation material		Polyphthalamide (PPA GF)
Flammability class per UL94		V0
Contact material		Electrolytic copper (E _{Cu})
Contact plating		Tin
Fire load		0.026 MJ
Weight		1.2 g



Environmental requirements	
Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

Commercial data	
Product Group	26 (picoMAX Connectors)
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 8.0	EC002637
ETIM 7.0	EC002637
PU (SPU)	200 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821161080
Customs tariff number	85366930000

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-49736/A1
CSA DEKRA Certification B.V.	C22.2	2362521
CSA DEKRA Certification B.V.	C22.2 No. 158	2362521
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-102260 REV.1
UL Underwriters Laboratories Inc.	UL 1977	E45171

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 2091-1423	

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2010.85 KB	

CAD/CAE-Data

CAD data	CAE data
2D/3D Models 2091-1423	ZUKEN Portal 2091-1423

1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket

 Item No.: 2091-1123 1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 3-pole; 1,50 mm²; light gray	 Item No.: 2091-1103/002-000 1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 3-pole; Gripping plate sliding connector release; 1,50 mm²; light gray	 Item No.: 2091-1103/002-1000 1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 3-pole; Gripping plate sliding connector release; direct marking; 1,50 mm²; light gray	 Item No.: 2091-1103 1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 3-pole; Gripping plate; 1,50 mm²; light gray
 Item No.: 2091-1103/000-1000 1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 3-pole; Gripping plate; direct marking; 1,50 mm²; light gray	 Item No.: 2091-1103/000-5000 1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 3-pole; Gripping plate; direct marking; 1,50 mm²; light gray		

1.2 Optional Accessories


1.2.1 Coding

1.2.1.1 Coding

 Item No.: 2091-1610 Coding key carrier; suitable for 3.5 mm pin spacing; orange

Installation Notes

Coding



Coding a male header (via coding key carrier and two keys for male header, see symbol).

