




Color: ■ black

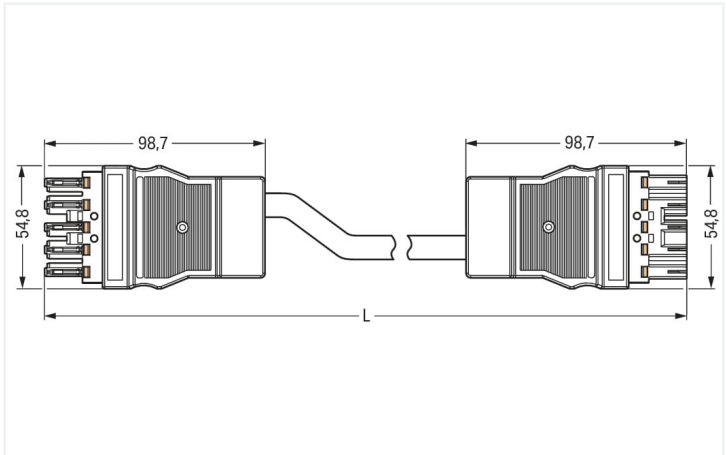

Dimensions in mm

Cable assembly WINSTA® MIDI A coding

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® MIDI cable assembly with protection type IP20. The pluggable installation connectors with spring pressure connection technology work without screw connections. They allow fast, efficient, error-free installation in numerous applications. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismating. The pluggable installation connector is protected in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). This means that users' fingers will never come into contact with energised elements. General mains applications for almost any domain of use can be implemented with WINSTA® MIDI pluggable installation connectors with A coding. This pluggable installation connector can be used for electrical currents up to 25 A. Thus the product is especially suitable for high power loads. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates exemplary electrification. Due to the integrated test slot, connections can be checked even when they are plugged in. That saves time and reduces installation labor and expense. According to the European CPR, the fire class of the cables used in construction is essential for the safety of buildings, too. For buildings with average safety requirements, cable assemblies with fire class E are suitable. In the manufacturing of this cable assembly, halogens were deliberately omitted. This is an important contribution to environmental protection.

Fast, error-free assembly thanks to cable assemblies from WAGO

The cable is pre-assembled with a socket and a plug. WINSTA® is the pluggable connection system that is ideally tailored to the strict requirements of electrical installation. It allows fast, secure and, above all, error-free installation of components and cables. Now you can also cut installation expenses without compromising quality and safety: The WINSTA® MIDI pluggable installation connector with protection against mismating eliminates the need for servicing and prevents unnecessary downtime.

- pluggable installation connectors with protection against mismating
- for automation controllers
- with A coding for a great number of applications
- flexible installation to save space
- fast, secure installation

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data      |  |                |     | Ratings per UL 1977 |                                                                                                                                                                                                                                                                        |
|----------------------|--|----------------|-----|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ratings per          |  | IEC/EN 60664-1 |     | Ratings per UL 1977 |                                                                                                                                                                                                                                                                        |
| Overvoltage category |  | III            | III | II                  | Note for the US market<br><br>Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office. |
| Pollution degree     |  | 3              | 2   | 2                   |                                                                                                                                                                                                                                                                        |
| Nominal voltage      |  | 400 V          | -   | -                   |                                                                                                                                                                                                                                                                        |
| Rated surge voltage  |  | 6 kV           | -   | -                   |                                                                                                                                                                                                                                                                        |
| Rated current        |  | 25 A           | -   | -                   |                                                                                                                                                                                                                                                                        |



| General information        |                                                                                          |
|----------------------------|------------------------------------------------------------------------------------------|
| Note on contact resistance | approx. 1 mΩ of contact resistance<br>approx. 0.25 mΩ contact transition plug/<br>socket |

| Connection data            |                      |                         |                |
|----------------------------|----------------------|-------------------------|----------------|
| Total number of potentials | 5                    | Connection 1            |                |
| PE function                | Preceding PE contact | Pole number             | 5              |
|                            |                      | Sheathed cable diameter | 13 ... 16.1 mm |
|                            |                      | Wire cross-section      | 4 mm²          |
|                            |                      | Connection type         | Socket - Plug  |

| Physical data |                        |
|---------------|------------------------|
| Pin spacing   | 10 mm / 0.394 inches   |
| Width         | 54.8 mm / 2.157 inches |
| Height        | 21 mm / 0.827 inches   |
| Total length  | 8 m                    |

| Mechanical data                         |                                                                                                               |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Application                             | General mains applications                                                                                    |
| Coding                                  | A                                                                                                             |
| Variable coding                         | Yes                                                                                                           |
| Marking                                 | N L1 L2 L3                                                                                                    |
| Potential marking                       | N L1 L2 L3                                                                                                    |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 | 200, without resistive load                                                                                   |
| Connection type                         | Socket - Plug                                                                                                 |
| Type of pre-assembled cable             | Interconnecting cable                                                                                         |
| Cable type                              | H05Z1Z1-F 5G4                                                                                                 |
| Protection type                         | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

| Plug-in connection            |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All WINSTA® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                                |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |



| Material data                    |                                                                                                                        |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Note (material data)             | <a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a> |
| Color                            | black                                                                                                                  |
| Insulation material              | Polyamide (PA66)                                                                                                       |
| Fire class per EN 50575          | E <sub>ca</sub>                                                                                                        |
| Contact material                 | Copper or copper alloy; surface-treated                                                                                |
| Contact plating                  | Tin                                                                                                                    |
| Fire load                        | 1.77 MJ                                                                                                                |
| Connector color                  | black                                                                                                                  |
| Strain relief color              | black                                                                                                                  |
| Sheathed cable color             | black                                                                                                                  |
| Printing color of sheathed cable | white                                                                                                                  |
| Halogen-free                     | Yes                                                                                                                    |
| Silicon-free                     | Yes                                                                                                                    |
| Sheath material                  | Halogen-free                                                                                                           |
| Rubber cable                     | No                                                                                                                     |
| Weight                           | 2951.7 g                                                                                                               |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 8.0              | EC002587      |
| ETIM 7.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | DE            |
| GTIN                  | 4055143273664 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |

Approvals / Certificates

| General approvals                     |          |                  | Declarations of conformity and manufacturer's declarations |          |                  |
|---------------------------------------|----------|------------------|------------------------------------------------------------|----------|------------------|
|                                       |          |                  | Approval                                                   | Standard | Certificate Name |
| Approval                              | Standard | Certificate Name | EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG    | -        | -                |
| CCA<br>DEKRA Certification B.V.       | EN 61535 | NTR NL-7972      | UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG    | -        | -                |
| KEMA/KEUR<br>DEKRA Certification B.V. | EN 61535 | 71-123834        |                                                            |          |                  |



Downloads

Environmental Product Compliance

|                                  |  |  |   |
|----------------------------------|--|--|---|
| Compliance Search                |  |  |   |
| Environmental Product Compliance |  |  | ↓ |
| 771-8995/018-801                 |  |  |   |

Documentation

|                  |            |                 |   |
|------------------|------------|-----------------|---|
| Bid Text         |            |                 |   |
| 771-8995/018-801 | 19.02.2019 | xml<br>2.92 KB  | ↓ |
| 771-8995/018-801 | 16.03.2015 | doc<br>26.00 KB | ↓ |

CAD/CAE-Data

|                   |   |
|-------------------|---|
| CAE data          |   |
| EPLAN Data Portal | ↓ |
| 771-8995/018-801  |   |

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



**Item No.: 770-101**  
Locking lever; for flying leads; for manual operation; black



**Item No.: 770-121**  
Locking lever; for flying leads; for manual operation; white



**Item No.: 770-111**  
Locking lever; for flying leads; for tool operation; black



**Item No.: 770-131**  
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



**Item No.: 770-201**  
Lockout cap; 12-pole, separable; for sockets; Plastic; black



**Item No.: 770-221**  
Lockout cap; 12-pole, separable; for sockets; Plastic; white



**Item No.: 770-360**  
Lockout cap; for plugs; 5-pole; separable; yellow



**Item No.: 897-2005**  
Protective cap; Type4; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



**Item No.: 770-310**  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



**Item No.: 770-450/000-006**  
Marker card; Plastic; blue



**Item No.: 770-450/000-001**  
Marker card; Plastic; green



**Item No.: 770-450/000-012**  
Marker card; Plastic; orange



**Item No.: 770-450/000-005**  
Marker card; Plastic; red



**Item No.: 770-450**  
Marker card; Plastic; white



**Item No.: 770-450/000-002**  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



**Item No.: 210-334**  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white



**Item No.: 210-333**  
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white