




Data Sheet | Item Number: 859-740

Optocoupler module; Nominal input voltage: 24 VDC; Output voltage range: 3 ... 30 VDC; Limiting continuous current: 5 A; 2-wire connection; Module width: 6 mm; gray


<https://www.wago.com/859-740>

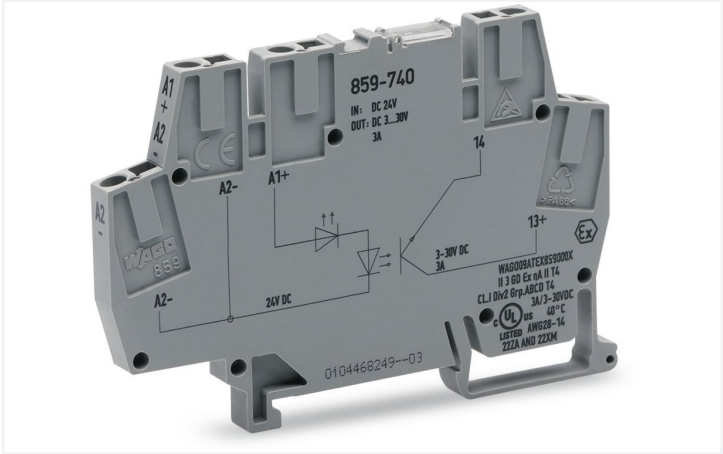


Color: ■ gray

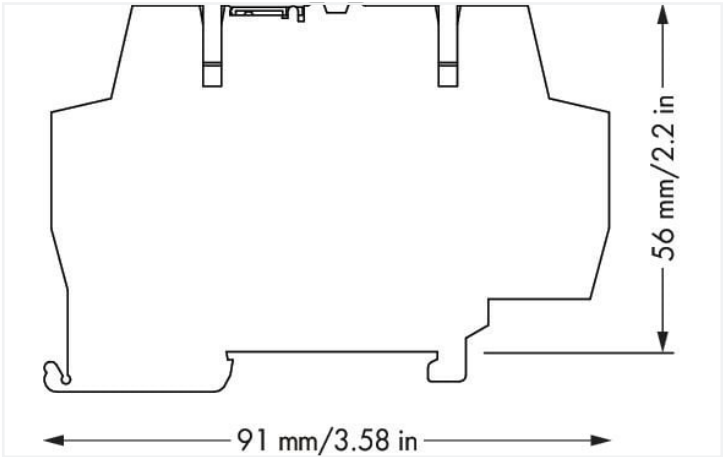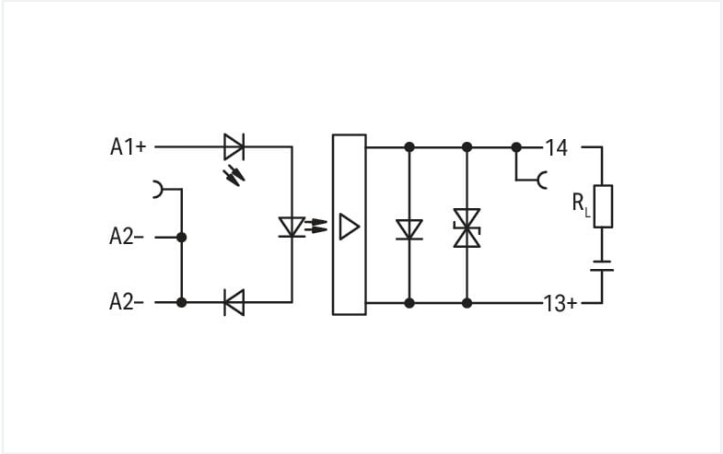

Dimensions in mm

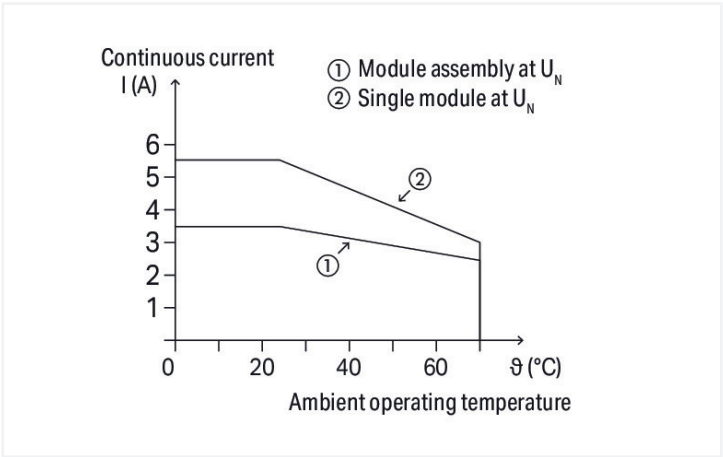

Current-carrying capacity curve

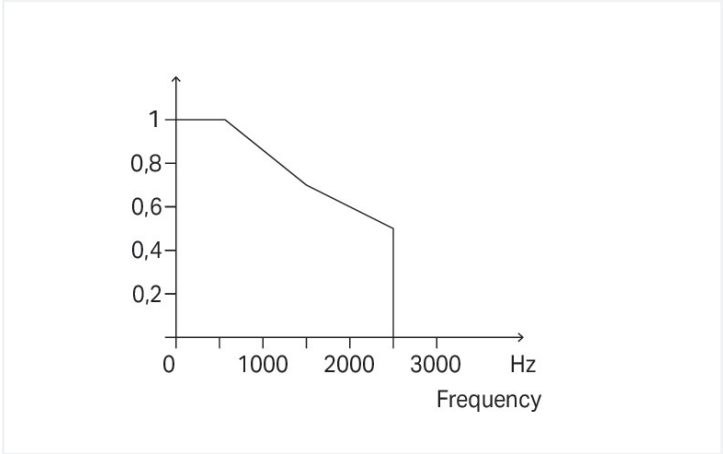

Load current correction factor



Notes		
Note		Optocouplers and solid state relays are designed for use in signal processing networks, which are not supplied by the low-voltage power supply networks.

Technical data

Control circuit		Load circuit	
Nominal input voltage U _N	DC 24 V	Number of make/switch-on contacts	1
Input voltage range (low level)	DC 0 ... 6.5 V	Circuit type	2-wire connection
Input voltage range (high level)	DC 16 ... 30 V	Limiting continuous current	5.5 A
Nominal input current at U _N	8 mA	Peak output current	25 A
Input current range	1 ... 12 mA	Nominal output voltage	DC 24 V
		Output voltage range	DC 3 ... 30 V
		Voltage drop	≤ 0.4 VDC
		Leakage current at rated voltage	≤ 10 µA
		Turn-on time	≤ 30 µs
		Turn-off time	≤ 100 µs
		Rise time (t ₁₀₋₉₀)	16 µs
		Drop-out time (t ₉₀₋₁₀)	16 µs
		Switching frequency	≤ 2.5 kHz

Signaling	
Status indicator	Yellow LED

Safety and protection

Rated voltage	300 V
Overvoltage category	II
Pollution degree	2
Dielectric strength (control/load circuit) (AC, 1 min)	2.5 kVrms
Insulation type (control/load circuit)	Basic insulation
Insulation type (between adjacent devices of the same type)	Reinforced insulation (safe isolation)
Insulation type (to adjacent devices of different types)	Basic insulation
Protection type	IP20; in connected state or when using 859-525 end plate

Connection data

Connection technology	CAGE CLAMP®
Solid conductor	0.2 ... 2.5 mm² / 24 ... 14 AWG
Fine-stranded conductor	0.2 ... 2.5 mm² / 24 ... 14 AWG
Fine-stranded conductor; with insulated ferrule	0.2 ... 1.5 mm² / 24 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.2 ... 1.5 mm² / 24 ... 16 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches



Physical data		
Width		6 mm / 0.236 inches
Height		91 mm / 3.583 inches
Depth from upper-edge of DIN-rail		56 mm / 2.205 inches

Mechanical data		
Mounting type		DIN-35 rail
Mounting position		horizontal (standing/lying); vertical

Material data		
Color		gray
Fire load		0.443 MJ
Weight		18.5 g

Environmental requirements		
Ambient temperature (operation at U _N)		-40 ... +70 °C
Ambient temperature UL (operation at U _N)		-40 ... +40 °C
Ambient temperature (storage)		-40 ... +85 °C
Processing temperature		-25 ... +50 °C
Temperature range of connection cable		≥ (T _{ambient} + 20 K)
Relative humidity		5 ... 95 % (no condensation permissible)
Operating altitude (max.)		2000 m

Standards and specifications		
Standards/specifications		EN 61010-2-201 EN 61000-6-2 EN 61000-6-3

Commercial data		
Product Group		6 (INTERFACE ELECTRONIC)
eCl@ss 10.0		27-26-15-03
eCl@ss 9.0		27-26-15-03
ETIM 8.0		EC001504
ETIM 7.0		EC001504
PU (SPU)		10 pcs
Packaging type		Box
Country of origin		CN
GTIN		4055143605427
Customs tariff number		85365005000

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungs- stelle	TP TC 020/2011	EAC_Certificate_RU_C- DE.AM02.B.00115_19
UL Underwriters Laboratories Inc. (ORDINARY LOCATI- ONS)	UL 508	E175199 Sec.4

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Approvals for hazardous areas



Approval	Standard	Certificate Name
CCC CNEX	CNCA-C23-01	2021312304000982 (Ex ec IIC T4 Gc)
UKEx WAGO GmbH & Co. KG	EN 60079-0	WAGO22UKEX007X_ec
UL Underwriters Laboratories Inc. (HAZARDOUS LOCA- TIONS)	ANSI/ISA 12.12.01	E198726

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 859-740



Documentation

Bid Text
859-740
19.02.2019
xml 3.77 KB
↓
859-740
20.02.2019
docx 15.30 KB
↓

Instruction Leaflet
CCC Ex (Additional in- formation)
26.04.2023
pdf 132.68 KB
↓
Relay modules, Opto- coupler modules
V 2.0.0 19.01.2022
pdf 2066.27 KB
↓



CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 859-740	EPLAN Data Portal 859-740
	WSCAD Universe 859-740
	ZUKEN Portal 859-740

1 Compatible Products
1.1 Optional Accessories
1.1.1 End plate
1.1.1.1 End plate



[Item No.: 859-525](#)
End and intermediate plate; 1 mm thick; gray

1.1.1.2 Intermediate plate

[Item No.: 859-525](#)
End and intermediate plate; 1 mm thick; gray

1.1.2 Ferrule			
1.1.2.1 Ferrule			
			
Item No.: 216-321 Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow	Item No.: 216-322 Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise	Item No.: 216-221 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white	Item No.: 216-222 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray
			
Item No.: 216-223 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red	Item No.: 216-224 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black		

1.1.3 Jumper

1.1.3.1 Jumper



Item No.: 859-410/000-006

Jumper; for jumper slot; 10-way; insulated; blue



Item No.: 859-410

Jumper; for jumper slot; 10-way; insulated; light gray



Item No.: 859-410/000-005

Jumper; for jumper slot; 10-way; insulated; red



Item No.: 859-410/000-029

Jumper; for jumper slot; 10-way; insulated; yellow



Item No.: 859-402/000-006

Jumper; for jumper slot; 2-way; insulated; blue



Item No.: 859-402

Jumper; for jumper slot; 2-way; insulated; light gray



Item No.: 859-402/000-005

Jumper; for jumper slot; 2-way; insulated; red



Item No.: 859-402/000-029

Jumper; for jumper slot; 2-way; insulated; yellow



Item No.: 859-403/000-006

Jumper; for jumper slot; 3-way; insulated; blue



Item No.: 859-403

Jumper; for jumper slot; 3-way; insulated; light gray



Item No.: 859-403/000-005

Jumper; for jumper slot; 3-way; insulated; red



Item No.: 859-403/000-029

Jumper; for jumper slot; 3-way; insulated; yellow



Item No.: 859-404/000-006

Jumper; for jumper slot; 4-way; insulated; blue



Item No.: 859-404

Jumper; for jumper slot; 4-way; insulated; light gray



Item No.: 859-404/000-005

Jumper; for jumper slot; 4-way; insulated; red



Item No.: 859-404/000-029

Jumper; for jumper slot; 4-way; insulated; yellow



Item No.: 859-405/000-006

Jumper; for jumper slot; 5-way; insulated; blue



Item No.: 859-405

Jumper; for jumper slot; 5-way; insulated; light gray



Item No.: 859-405/000-005

Jumper; for jumper slot; 5-way; insulated; red



Item No.: 859-405/000-029

Jumper; for jumper slot; 5-way; insulated; yellow



Item No.: 859-406/000-006

Jumper; for jumper slot; 6-way; insulated; blue



Item No.: 859-406

Jumper; for jumper slot; 6-way; insulated; light gray



Item No.: 859-406/000-005

Jumper; for jumper slot; 6-way; insulated; red



Item No.: 859-406/000-029

Jumper; for jumper slot; 6-way; insulated; signal yellow



Item No.: 859-407/000-006

Jumper; for jumper slot; 7-way; insulated; blue



Item No.: 859-407

Jumper; for jumper slot; 7-way; insulated; light gray



Item No.: 859-407/000-005

Jumper; for jumper slot; 7-way; insulated; red



Item No.: 859-407/000-029

Jumper; for jumper slot; 7-way; insulated; yellow



Item No.: 859-408/000-006

Jumper; for jumper slot; 8-way; insulated; blue



Item No.: 859-408

Jumper; for jumper slot; 8-way; insulated; light gray



Item No.: 859-408/000-005

Jumper; for jumper slot; 8-way; insulated; red



Item No.: 859-408/000-029

Jumper; for jumper slot; 8-way; insulated; yellow



Item No.: 859-409/000-006

Jumper; for jumper slot; 9-way; insulated; blue



Item No.: 859-409

Jumper; for jumper slot; 9-way; insulated; light gray



Item No.: 859-409/000-005

Jumper; for jumper slot; 9-way; insulated; red



Item No.: 859-409/000-029

Jumper; for jumper slot; 9-way; insulated; yellow

1.1.4 Marking

1.1.4.1 Marker



Item No.: 2009-145

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 248-502

Mini-WSB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 248-503

Mini-WSB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 248-504

Mini-WSB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 248-506

Mini-WSB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 248-501

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

1.1.4.2 Marking device



Item No.: 210-110

Fiber-tip pen

1.1.5 Test and measurement

1.1.5.1 Testing accessories



Item No.: 859-500

WAGO Test pin; 1 mm Ø; 30 V AC / 60 V DC; CAT0; 1 A; 10 mm uninsulated; Test lead for soldering up to 0,5mm²

1.1.6 Tool

1.1.6.1 Operating tool




Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured


Installation Notes

Conductor termination



Conductor termination

Commoning



Easy commoning using adjacent jumpers

Marking



Marking via Mini-WSB Quick Marking System