

# RF plug-through socket with pin earthing

05-340

4 year warranty

This plug-through socket has a 10A single-pole switch contact and 3 modes:

- conventional switch function;
- teleruptor;
- delayed power cut: 7 minutes (time cannot be set).


## Technical data

RF plug-through socket with pin earthing

- Equipped with one switching contact 10 A, 230 V, 50Hz
- Choose from 3 different modes
- Max. 32 transmitters per receiver
- Power supply: 230 V 50 Hz
- Max. transmission range in a building: 30 m
- Max. transmission range in open field: 100 m
- Modulation type: FSK
- Not compatible with the wireless bridge
- Maximum MCB rating: 16 A (limited by national installation rules)
- Communication protocol: Easywave
- Operating frequency: 868.3 GHz
- Dimensions (HxWxD): 119 x 75 x 50 mm
- Marking: CE



## Dimensions

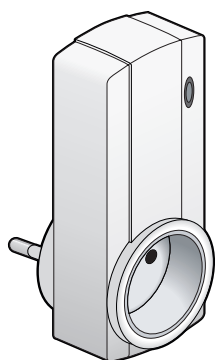

[www.niko.eu](http://www.niko.eu)

**niko**

05-340 - 27-06-2023