Mini-interface RF pour boutons-poussoirs ou interrupteurs

410-00315

4 ans de garantie



Mini RF interface for push buttons or switches, incl. battery

Données techniques

Mini-interface RF pour boutons-poussoirs ou interrupteurs.

- Not compatible with the wireless bridge, compatible with the wireless smart hub
- Fonction:
  - When connecting up to four push buttons: the wireless telegram is being sent as long as the push button is pressed (max. 10 s).
  - When connecting up to two switches: the wireless telegram will be sent as soon as the contact is closed. When the contact is opened, a new telegram is sent. Any programming can be assigned when closing or opening the contact.
- Tension d'alimentation: 3 Vdc / 3 V batterie
- Protocole de communication sans fil: Easywave
- Température ambiante minimum: 20 °C
- Température ambiante maximum: 60 °C
- Dimensions (HxLxP): 9 mm x 29.2 mm x 34.7 mm
- Marquage: CE

Dimensions


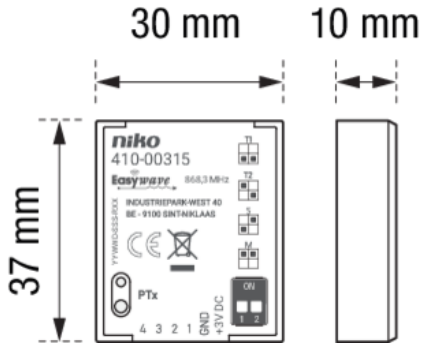


Schéma de câblage



*same principle is applicable for push button, switch and shutter control