


## 13A Socket Outlets

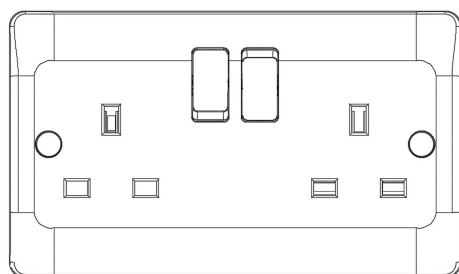

### Description

A range of 1g and 2g socket outlets with either single or double switches, or unswitched.

This uniquely shaped range is easy to install, with clear bold terminal markings and is supplied in individual protective polybags suitable for display.

### Features

- Contemporary designed profile
- Concave rockers
- Only one size 4mm screwdriver needed
- Terminals have clear bold markings
- Top facing terminal screws
- DP switch versions
- 2 earth terminals on DP sockets
- Terminals have large lead-ins
- 25-year guarantee

### Range

1g unswitched	VP1206
2g unswitched	VP1208
1g standard SP switch	VP1207SP
1g switched DP neon	VP1207DPN
2g standard SP switch	VP1209SP
2g switched DP neon	VP1209DPN
1g standard DP switch	VP1207DP
2g standard DP switch	VP1209DP

### Technical Specification

Voltage rating	250Vac
Current Rating	13A per outlet
Contact gap	3mm
Front plate material	Urea formaldehyde

Urea flammability classification UL94 grade V-0

No user serviceable parts

### Standards

- BS 1363-2

### Back Boxes

Minimum recommended depth

	Flush 25mm	Dry lining 35mm	Surface 25mm
1g	DB162	DB2540	VP1221
2g	DB163	DB2541	VP1223

### Terminal Capacity

	2.5mm <sup>2</sup>	4mm <sup>2</sup>	6mm <sup>2</sup>	10mm <sup>2</sup>
L & N	4	3	2	1