


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.3V I:0.2415A P:54.13W PF:0.9732 Lamp Flux:6947.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Deta Electrical Company Ltd.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 128.35 lm/W			
MODEL	BR4251, BR4252, BR4253, BR4254	I _{max} (cd)	2003	S/MH (C0/180)	1.30
NOMINAL POWER(W)	54.1274	LOR(%)	100.0	S/MH (C90/270)	1.22
RATED VOLTAGE(V)	230	TOTAL FLUX (lm)	6947.1	η UP,DN (C0-180)	4.2,45.7
NOMINAL FLUX(lm)	6947.12	CIE CLASS	DIRECT	η UP,DN (C180-360)	4.2,45.9
LAMPS INSIDE	1	η up (%)	8.4	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230.32	η down (%)	91.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

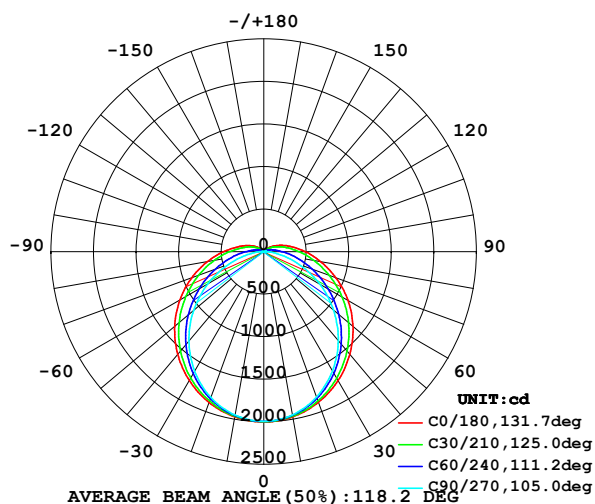

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

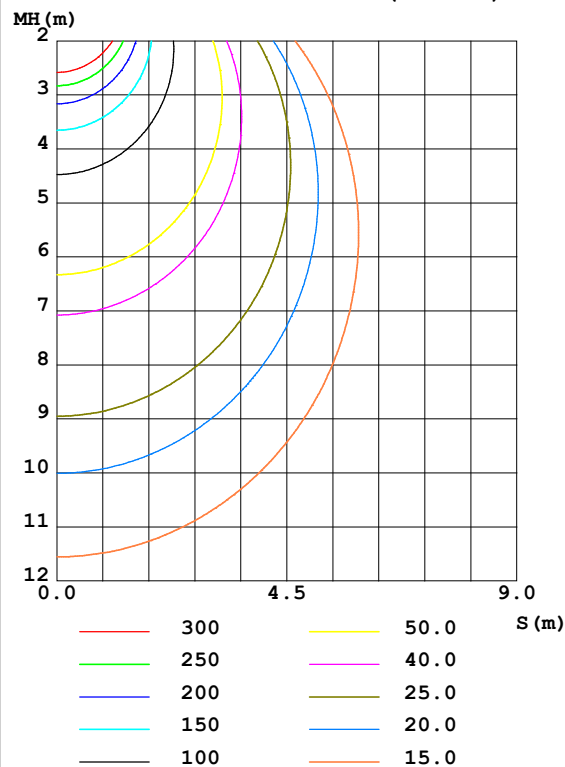

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:11.780m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1971	1959	1948	1950	1972	1960	1951	1955	0- 10	188.7	188.7	2.72,2.72
20	1884	1850	1818	1840	1885	1853	1823	1847	10- 20	539.5	728.1	10.5,10.5
30	1749	1683	1617	1669	1751	1687	1624	1679	20- 30	816.8	1545	22.2,22.2
40	1574	1470	1363	1452	1574	1474	1370	1463	30- 40	988.0	2533	36.5,36.5
50	1370	1227	1071	1203	1369	1229	1077	1217	40- 50	1039	3572	51.4,51.4
60	1142	968.6	758.0	939.9	1140	968.2	760.6	954.0	50- 60	974.0	4546	65.4,65.4
70	903.6	714.3	442.7	682.4	902.6	712.8	441.9	696.5	60- 70	814.5	5360	77.2,77.2
80	678.3	488.4	176.8	455.9	672.0	484.5	173.6	469.3	70- 80	603.2	5964	85.8,85.8
90	488.4	317.6	30.30	282.2	472.6	307.7	31.25	300.8	80- 90	399.1	6363	91.6,91.6
100	338.5	200.2	18.07	172.8	322.7	190.4	20.48	181.3	90-100	251.7	6614	95.2,95.2
110	221.8	118.1	13.26	102.1	213.0	113.7	13.41	106.9	100-110	152.9	6767	97.4,97.4
120	133.4	62.41	13.27	55.28	129.7	60.83	13.65	58.15	110-120	85.64	6853	98.6,98.6
130	69.42	32.41	14.04	29.56	65.88	31.77	14.62	30.59	120-130	43.32	6896	99.3,99.3
140	31.02	20.79	15.53	21.21	27.68	21.40	16.23	21.08	130-140	20.42	6917	99.6,99.6
150	25.49	20.28	17.58	20.66	23.40	20.55	17.97	19.86	140-150	13.17	6930	99.8,99.8
160	22.70	20.11	19.37	20.56	21.72	20.39	19.46	19.69	150-160	9.476	6939	99.9,99.9
170	21.58	20.55	20.79	20.70	21.09	20.60	20.84	20.20	160-170	5.806	6945	100,100
180	20.14	21.48	21.63	21.46	20.19	21.47	21.66	21.43	170-180	1.987	6947	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:11.780m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.3V I:0.2415A P:54.13W PF:0.9732 Lamp Flux:6947.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Deta Electrical Company Ltd.	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	1.00	1.00	1.00	.94	.94	.94	.92
1.0	.99	.94	.90	.96	.92	.87	.90	.87	.83	.85	.82	.79	.80	.77	.75	.72
2.0	.86	.78	.72	.83	.76	.70	.78	.72	.67	.73	.69	.64	.69	.65	.62	.59
3.0	.75	.66	.59	.72	.64	.58	.68	.61	.56	.64	.58	.54	.61	.56	.52	.49
4.0	.66	.57	.50	.64	.55	.49	.60	.53	.47	.57	.51	.46	.54	.48	.44	.41
5.0	.59	.49	.42	.57	.48	.42	.54	.46	.40	.51	.44	.39	.48	.43	.38	.36
6.0	.53	.43	.37	.51	.43	.36	.49	.41	.35	.46	.39	.34	.44	.38	.33	.31
7.0	.48	.39	.32	.46	.38	.32	.44	.37	.31	.42	.35	.30	.40	.34	.30	.27
8.0	.43	.35	.29	.42	.34	.28	.40	.33	.28	.38	.32	.27	.37	.31	.26	.24
9.0	.40	.31	.26	.39	.31	.25	.37	.30	.25	.35	.29	.24	.34	.28	.24	.22
10.0	.37	.29	.23	.36	.28	.23	.34	.27	.23	.33	.26	.22	.31	.26	.22	.20

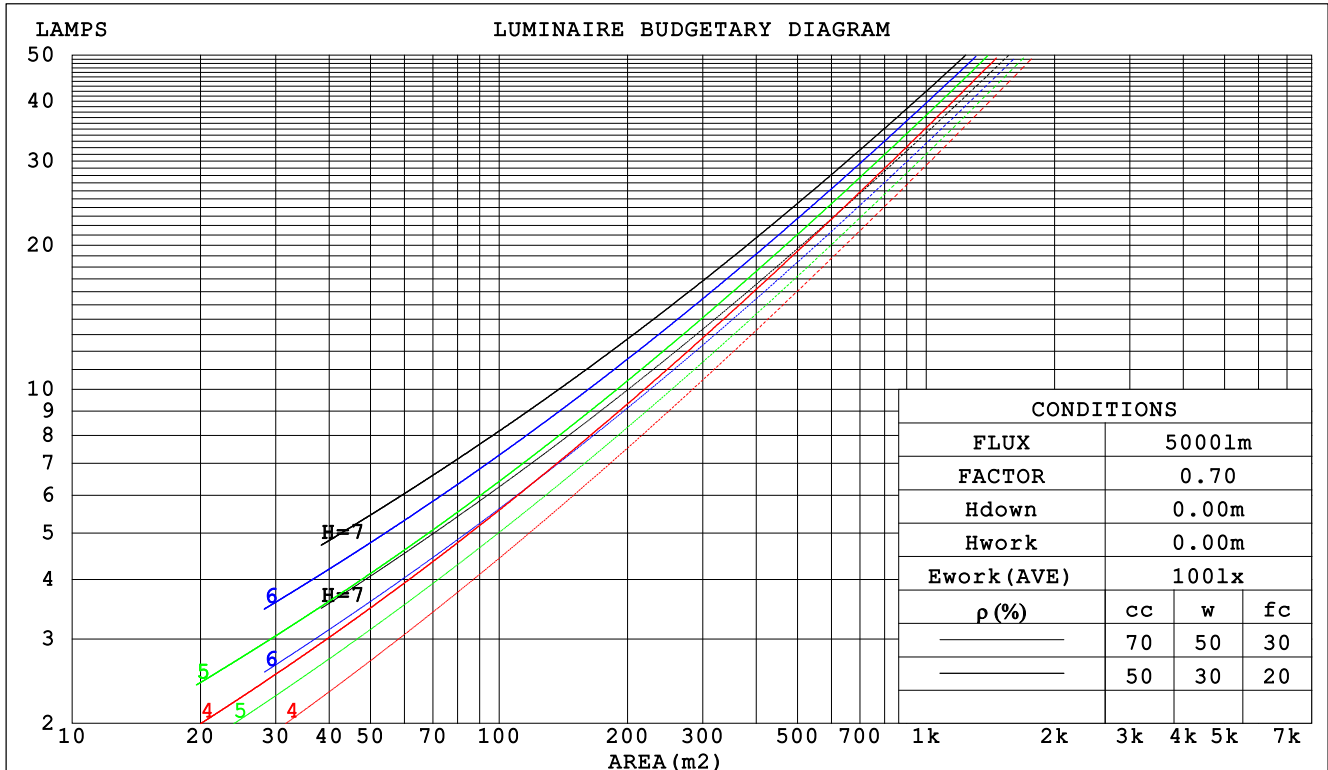

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:11.780m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.3V I:0.2415A P:54.13W PF:0.9732 Lamp Flux:6947.12x1 lm									
NAME:				TYPE:			WEIGHT:		
SPEC.:				DIM.:			SERIAL No.:		
MFR.: Deta Electrical Company Ltd.				SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.360	.205	.065	.350	.200	.063	.332	.190	.061	.315	.182	.058	.299	.174	.056		
2.0	.319	.175	.054	.310	.171	.053	.294	.164	.051	.279	.156	.049	.265	.150	.047		
3.0	.287	.153	.046	.279	.150	.045	.265	.143	.044	.251	.138	.042	.239	.132	.041		
4.0	.261	.135	.040	.254	.133	.039	.240	.128	.038	.228	.123	.037	.217	.118	.036		
5.0	.238	.121	.035	.232	.119	.035	.220	.115	.034	.209	.110	.033	.199	.106	.032		
6.0	.219	.110	.031	.214	.108	.031	.203	.104	.030	.193	.100	.029	.183	.097	.029		
7.0	.203	.100	.028	.198	.099	.028	.188	.095	.027	.179	.092	.027	.170	.089	.026		
8.0	.189	.092	.026	.184	.091	.026	.175	.088	.025	.167	.085	.024	.159	.082	.024		
9.0	.176	.085	.024	.172	.084	.024	.164	.081	.023	.156	.078	.022	.149	.076	.022		
10.0	.165	.079	.022	.161	.078	.022	.154	.075	.021	.147	.073	.021	.140	.071	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.255	.255	.255	.218	.218	.218	.149	.149	.149	.085	.085	.085	.027	.027	.027	
1.0	.248	.220	.195	.213	.189	.168	.145	.130	.116	.084	.075	.068	.027	.024	.022	
2.0	.241	.197	.160	.206	.169	.138	.141	.117	.096	.082	.068	.056	.026	.022	.018	
3.0	.233	.180	.137	.200	.155	.119	.137	.108	.083	.079	.063	.049	.025	.020	.016	
4.0	.225	.167	.122	.193	.144	.106	.133	.101	.075	.077	.059	.044	.025	.019	.015	
5.0	.218	.157	.112	.187	.136	.097	.129	.095	.069	.075	.056	.041	.024	.018	.013	
6.0	.210	.149	.104	.181	.129	.091	.125	.090	.064	.072	.053	.038	.023	.017	.013	
7.0	.203	.142	.099	.175	.123	.086	.121	.086	.061	.070	.051	.036	.023	.017	.012	
8.0	.197	.136	.095	.169	.118	.083	.117	.083	.059	.068	.049	.035	.022	.016	.012	
9.0	.190	.131	.091	.164	.114	.080	.114	.080	.057	.066	.047	.034	.021	.016	.011	
10.0	.185	.127	.089	.159	.110	.078	.110	.078	.055	.064	.046	.033	.021	.015	.011	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:11.780m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.3V I:0.2415A P:54.13W PF:0.9732 Lamp Flux:6947.12x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: Deta Electrical Company Ltd.					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.3	24.8	23.7	25.1	25.5	21.7	23.2	22.1	23.5	23.9
3H	25.6	26.9	26.0	27.3	27.7	23.1	24.5	23.5	24.9	25.3
4H	26.8	28.1	27.2	28.5	28.9	23.7	25.0	24.1	25.4	25.8
6H	28.1	29.3	28.5	29.7	30.2	24.1	25.3	24.5	25.7	26.2
8H	28.8	29.9	29.2	30.4	30.8	24.2	25.4	24.6	25.8	26.3
12H	29.6	30.7	30.1	31.2	31.6	24.3	25.4	24.7	25.8	26.3
4H 2H	23.8	25.1	24.3	25.5	26.0	22.6	23.9	23.1	24.3	24.8
3H	26.3	27.5	26.8	27.9	28.4	24.3	25.4	24.8	25.9	26.4
4H	27.7	28.8	28.2	29.2	29.8	25.0	26.1	25.5	26.5	27.0
6H	29.2	30.2	29.8	30.7	31.2	25.6	26.5	26.1	27.0	27.6
8H	30.1	30.9	30.6	31.5	32.0	25.8	26.7	26.4	27.2	27.8
12H	31.0	31.8	31.6	32.4	32.9	26.0	26.8	26.5	27.3	27.9
8H 4H	28.0	28.9	28.6	29.4	30.0	25.8	26.7	26.3	27.2	27.8
6H	29.8	30.6	30.4	31.1	31.7	26.7	27.4	27.3	28.0	28.6
8H	30.9	31.5	31.5	32.1	32.7	27.1	27.8	27.7	28.3	29.0
12H	32.1	32.6	32.7	33.2	33.9	27.4	28.0	28.0	28.6	29.3
12H 4H	28.1	28.9	28.6	29.4	30.0	26.0	26.8	26.6	27.4	28.0
6H	29.9	30.6	30.5	31.2	31.8	27.1	27.8	27.7	28.3	29.0
8H	31.1	31.7	31.7	32.2	32.9	27.6	28.2	28.3	28.8	29.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 6947 lm Total Lamp Luminous Flux. (8log(F/F0) = 6.7)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:11.780m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.3V I:0.2415A P:54.13W PF:0.9732 Lamp Flux:6947.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Deta Electrical Company Ltd.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	53	40	33	52	40	33	50	40	33	26
0.80	62	50	42	61	49	42	59	48	41	34
1.00	70	58	50	68	57	50	66	58	49	41
1.25	77	65	57	75	64	57	72	62	56	47
1.50	82	71	63	80	69	62	76	67	61	52
2.00	89	79	71	87	77	70	82	74	68	59
2.50	93	84	77	91	82	75	86	79	73	63
3.00	97	88	82	94	86	80	89	82	77	67
4.00	101	94	88	98	92	86	92	87	83	71
5.00	104	98	93	101	95	90	95	90	86	74
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-06-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.295
 Humidity: 65.0%
 Test Distance: 11.780m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.3V I:0.2415A P:54.13W PF:0.9732 Lamp Flux:6947.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Deta Electrical Company Ltd.	SUR.:	Shielding Angle:

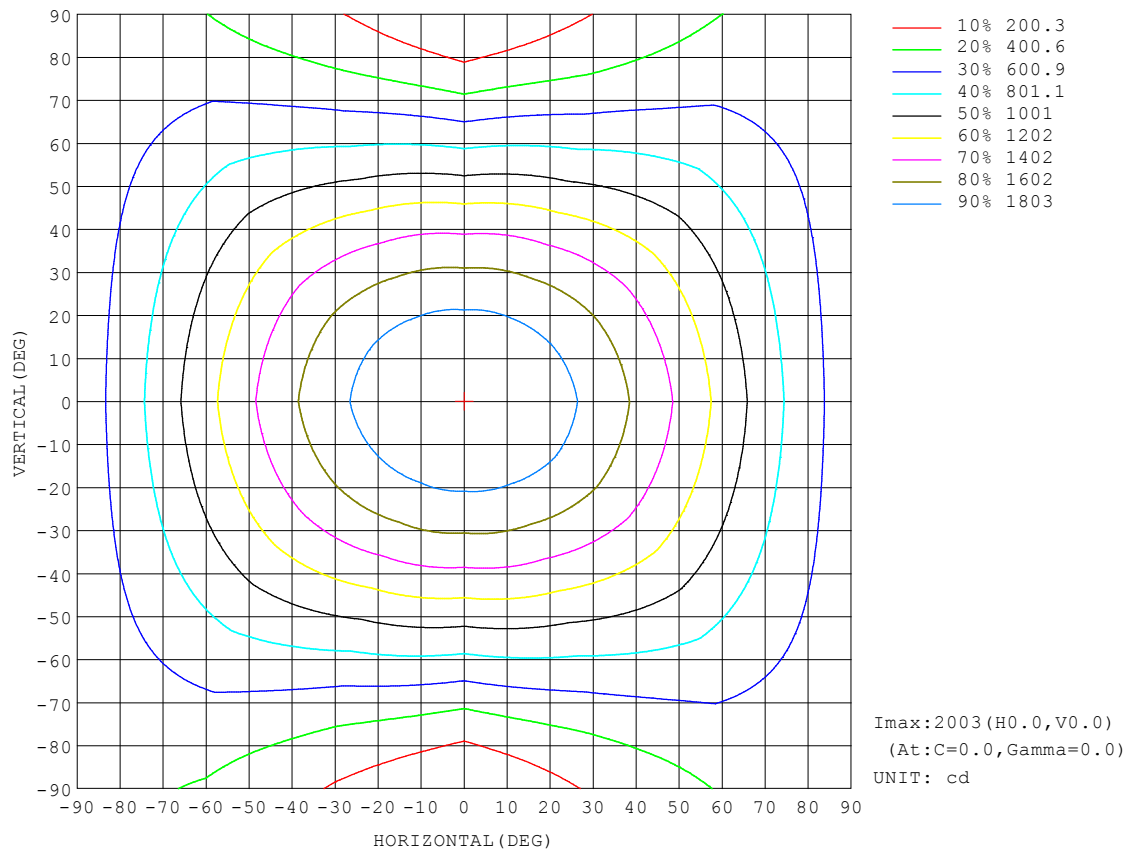


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:11.780m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.3V I:0.2415A P:54.13W PF:0.9732 Lamp Flux:6947.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Deta Electrical Company Ltd.	SUR.:	Shielding Angle:

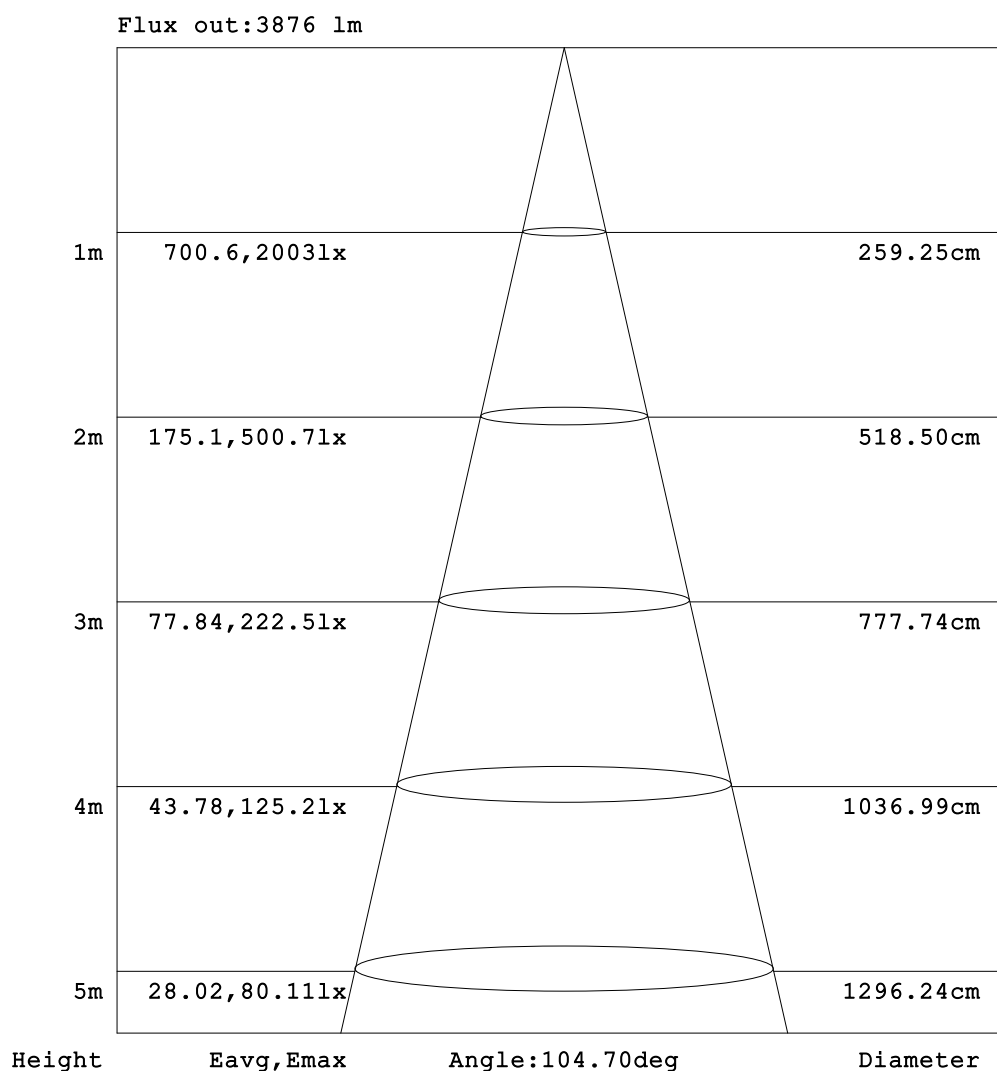


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:11.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:230.3V I:0.2415A P:54.13W PF:0.9732 Lamp Flux:6947.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Deta Electrical Company Ltd.	SUR.:	Shielding Angle:

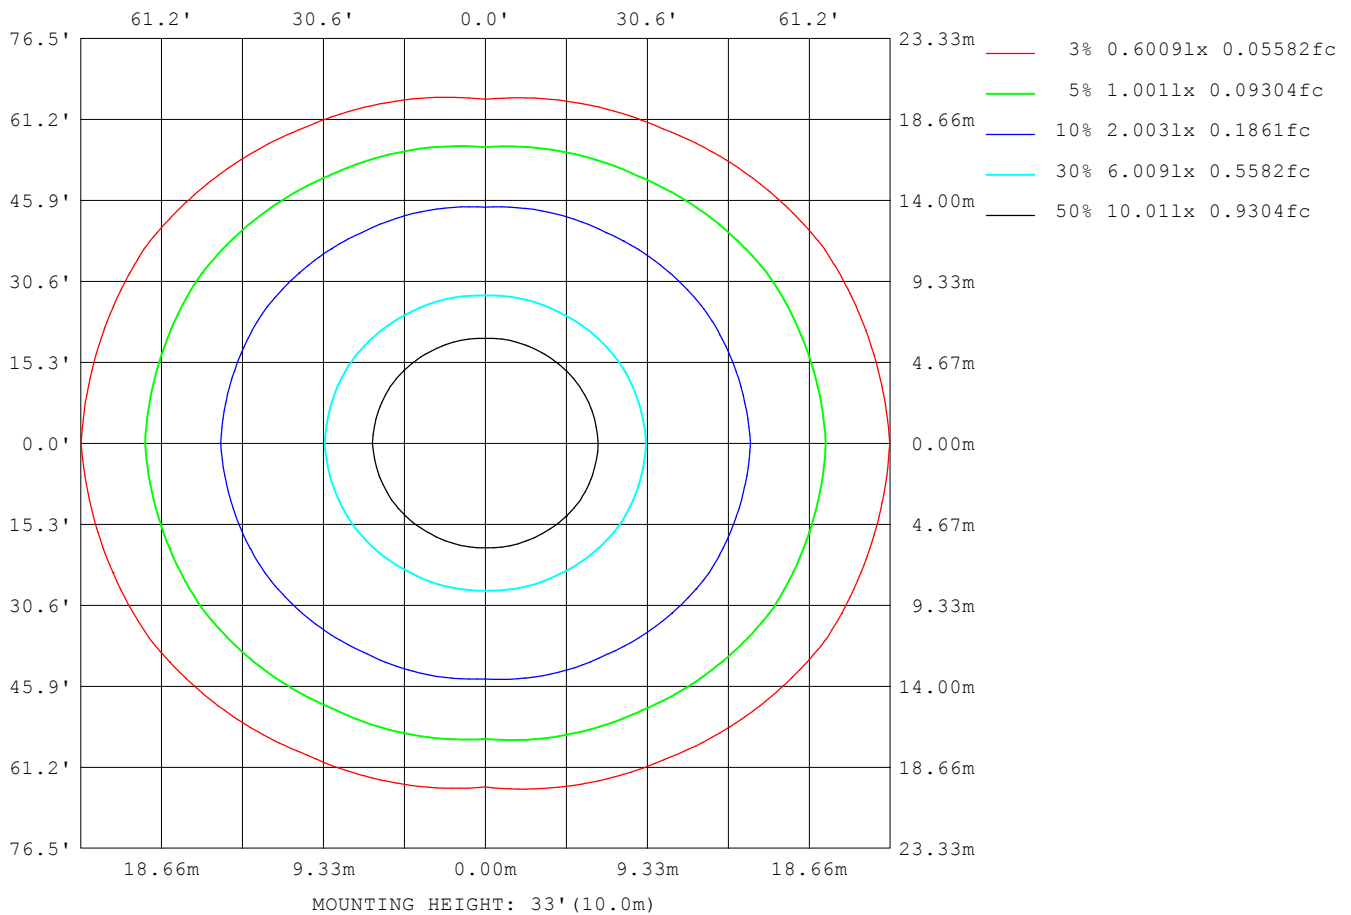

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:11.780m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.3V I:0.2415A P:54.13W PF:0.9732 Lamp Flux:6947.12x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Deta Electrical Company Ltd.	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	24174
L_0~180 (75) av	30365
L_0~180 (85) av	65713
L_90~270 (65) av	14169
L_90~270 (75) av	11527
L_90~270 (85) av	9295
L_45 (65) av	19635
L_45 (75) av	22683
L_45 (85) av	44432

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.295
Humidity:65.0%
Test Distance:11.780m [K=1.0000]
Remarks:

Planar Illuminance Curve

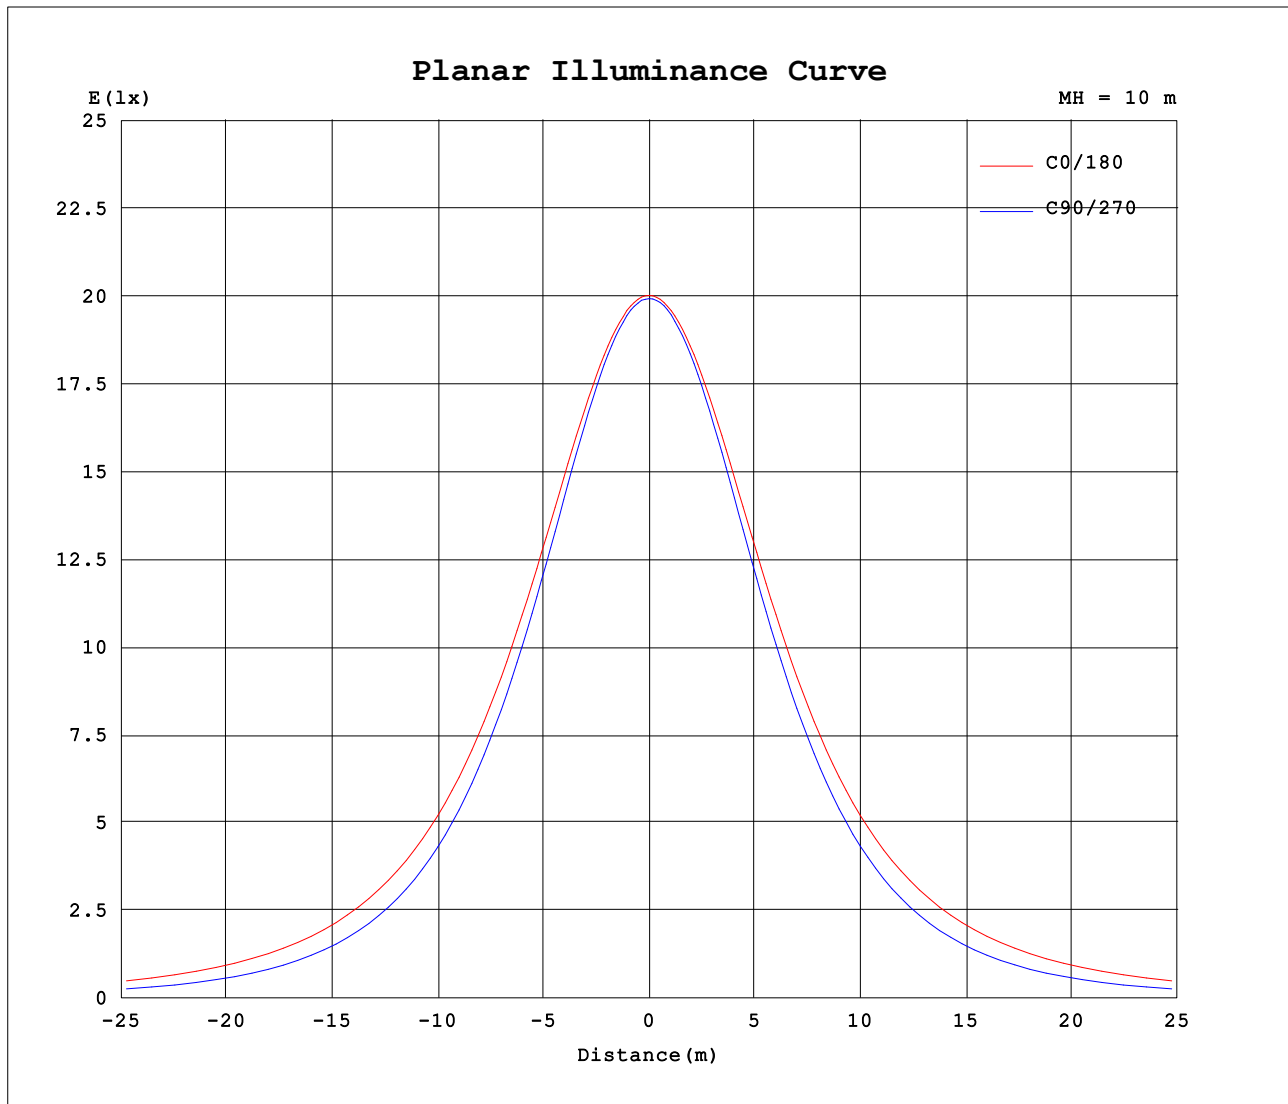

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-06-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.295
Humidity: 65.0%
Test Distance: 11.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.3V I:0.2415A P:54.13W PF:0.9732 Lamp Flux:6947.12x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: Deta Electrical Company Ltd.									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

γ (DEG)	C (DEG)																		
	0	30	60	90	120	150	180	210	240	270	300	330							
0	2003	2000	1996	1994	1992	1989	2003	2000	1996	1994	1992	1989							
5	1995	1990	1986	1983	1980	1980	1994	1991	1986	1984	1983	1981							
10	1971	1964	1954	1948	1948	1953	1972	1964	1956	1951	1954	1956							
15	1934	1923	1903	1893	1895	1911	1935	1924	1908	1898	1904	1915							
20	1884	1867	1834	1818	1826	1854	1885	1868	1839	1823	1835	1859							
25	1821	1798	1748	1725	1739	1783	1824	1799	1755	1732	1751	1790							
30	1749	1716	1650	1617	1638	1699	1751	1717	1656	1624	1651	1708							
35	1665	1624	1537	1496	1525	1605	1667	1625	1546	1503	1539	1614							
40	1574	1523	1416	1363	1401	1502	1574	1524	1424	1370	1415	1511							
45	1475	1415	1287	1221	1270	1391	1475	1415	1295	1227	1284	1402							
50	1370	1302	1152	1071	1132	1274	1369	1300	1159	1077	1146	1287							
55	1258	1184	1013	917	991	1155	1256	1181	1018	921	1004	1169							
60	1142	1063	874	758	848	1032	1140	1059	877	761	861	1047							
65	1022	940	739	599	709	909	1021	937	740	599	723	924							
70	904	820	609	443	576	789	903	818	608	442	590	803							
75	787	705	486	299	453	675	785	701	485	297	465	688							
80	678	598	379	177	345	566	672	591	378	174	357	582							
85	578	500	290	82.6	254	467	568	490	286	79.4	269	487							
90	488	416	219	30.3	184	381	473	403	213	31.3	201	401							
95	409	343	165	24.0	133	309	391	327	157	26.2	127	318							
100	338	279	122	18.1	96.3	249	323	264	117	20.5	106	257							
105	276	223	88.6	13.5	69.2	199	264	212	85.3	13.7	76.7	186							
110	222	176	60.4	13.3	47.4	157	213	167	60.1	13.4	52.7	161							
115	174	135	38.6	13.1	30.7	120	169	129	39.8	13.5	33.3	124							
120	133	100	24.4	13.3	21.7	88.9	130	95.9	25.8	13.6	23.0	93.3							
125	98.9	70.7	20.5	13.6	19.6	62.0	95.6	67.2	21.4	14.0	20.8	66.4							
130	69.4	45.6	19.2	14.0	18.9	40.2	65.9	43.6	20.0	14.6	19.6	41.6							
135	46.1	27.6	18.4	14.7	18.6	26.7	42.0	27.7	19.2	15.3	18.8	26.6							
140	31.0	23.4	18.2	15.5	18.6	23.8	27.7	23.9	18.9	16.2	18.5	23.6							
145	27.5	22.3	18.3	16.7	18.9	22.8	24.6	22.8	18.9	17.1	18.4	22.0							
150	25.5	21.5	19.0	17.6	19.2	22.1	23.4	22.0	19.1	18.0	18.6	21.1							
155	23.9	20.8	19.5	18.5	19.6	21.6	22.5	21.4	19.4	18.7	19.0	20.5							
160	22.7	20.4	19.9	19.4	20.0	21.1	21.7	20.9	19.9	19.5	19.3	20.0							
165	21.9	20.2	20.2	20.1	20.3	20.9	21.3	20.7	20.2	20.2	19.8	19.9							
170	21.6	20.5	20.6	20.8	20.5	20.9	21.1	20.8	20.4	20.8	20.4	20.0							
175	21.2	20.7	21.0	21.3	21.1	20.8	19.8	20.7	20.9	21.3	21.0	20.4							
180	20.1	21.4	21.6	21.6	21.6	21.3	20.2	21.4	21.5	21.7	21.6	21.2							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.295
 Humidity:65.0%
 Test Distance:11.780m [K=1.0000]
 Remarks: