


## Part M

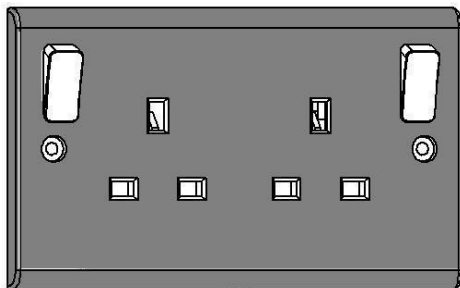

## Description

A range of wiring accessories which allow installations to comply with Part M of the Building Regulations, Access to and use of buildings.

## Features

- Part M wiring accessories have grey faceplates and white switches, allowing the accessory and switch to really stand out from its background
- Part M accessories have a light reflective value (LRV) of 20, providing a 80 point difference with a white wall that has a LRV of 100 (the regulation calls for a minimum of 30 point difference)
- Other features are the same as the non Part M equivalent, e.g. clear white marking, colour coded terminals concave rockers
- 25-year guarantee

## Technical Specification

Current rating	As per non-Part M equivalent
Frontplate material	Urea formaldehyde
Urea flammability classification	UL94 grade V-C

## Standards

- As per non-Part M equivalent

## Range

1g 13A DP switched grey socket	S1451
2g 13A DP outboard switched socket	S1453
1g 2w 10A plate switch	S1456
2g 2w 10A plate switch	S1457
1g 2w wide rocker plate switch	S1461
2g 2w wide rocker plate switch	S1462
Intermediate wide rocker plate switch	S1463
Switched spur with neon	S1471
Switched spur with bottom flex outlet	S1474
20A DP switch with neon	S1481
45A DP tall switch with neon	S1485
Cooker control switch with neon	S1489
Shaver Socket	S1490
Two module data plate	S1492
Four module data plate	S1494
1g gridswitch plate	G3391
2g gridswitch plate	G3392
3g gridswitch plate	G3393
4g gridswitch plate	G3394
6g gridswitch plate	G3395
8g gridswitch plate	G3396

## Back Boxes

Minimum recommended depth as per non-Part M equivalent

## Terminal Capacity

	2.5mm <sup>2</sup>	4mm <sup>2</sup>	6mm <sup>2</sup>	10mm <sup>2</sup>
L & N	4	3	2	1