


Shaver Socket

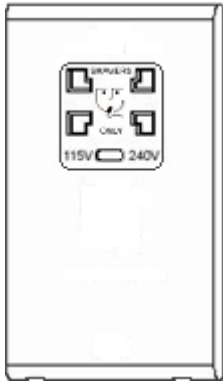

Description

This uniquely shaped range has concealed screws behind a smooth frontplate with the Slimline profile

Features

- Frontplates supplied in a protective polybag
- Top facing terminal screws
- Clear terminal markings
- Colour coded terminals
- Dual voltage socket
- Discreet neons
- Neon leads enclosed
- Grey font engraving
- Terminals have large lead-ins
- 2-year guarantee

Technical Specification

Voltage rating	250Vac
Output voltage	240V ~ or 115V ~
Current Rating	20VA
Isolation	Safety isolation transformer
Plate size	146 x 86 x 7mm

no user serviceable parts

Not suitable for continuous use or for loads of 20VA

Standards

- BS EN 60742
- BS 4573

Range

Shaver Socket Dual Voltage	8671
<i>Suffix finish with</i>	
White with white inserts	WHW
Chrome with white inserts	CHW

Back Boxes

Minimum recommended depth

Flush 47mm	Dry lining 46mm
DB168	DB2543

Terminal Capacity

	1mm ²	1.5mm ²
L	5	4