


## Telephone cable

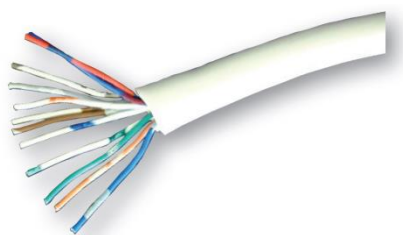

### Description

This range of telephone cable is suitable for modern day installation

### Features

- Complies with CW1308
- Each pair is twisted together

#### Conductor

- Bare copper
- 0.4mm Ø nominal

#### Insulation

- PVC
- 0.8mm Ø nominal

#### Sheath

- Standard PVC
- White
- 1902/2 – 3.4mm Ø nominal
- 1902/3 – 4.0mm Ø nominal
- 1902/4 – 4.6mm Ø nominal
- 1902/6 – 5.5mm Ø nominal

### Technical Specification

Conductor resistance	< 16.42Ω @ 20°C, DC
Insulation resistance	>200MΩ/m @ 20°C
Rated temperature	80°C
Rated voltage	30Vdc

### Standards

- RoHS

### Range

2 Pair telephone cable	100m	1902/2
3 Pair telephone cable	100m	1902/3
4 Pair telephone cable	100m	1902/4
6 Pair telephone cable	100m	1902/6

### Core Colours

	1902/2	1902/3	1902/4	1902/6
<b>Pair 1</b>	W / B B / W	W / B B / W	W / B B / W	W / B B / W
<b>Pair 2</b>	W / O O / W	W / O O / W	W / O O / W	W / O O / W
<b>Pair 3</b>	n/a	W / G G / W	W / G G / W	W / G G / W
<b>Pair 4</b>	n/a	n/a	W / Br Br / W	W / Br Br / W
<b>Pair 5</b>	n/a	n/a	n/a	W / Gr Gr / W
<b>Pair 6</b>	n/a	n/a	n/a	R / B B / R

W = White  
B = Blue  
O = Orange  
G = Green

Br = Brown  
Gr = Grey  
R = Red

First colour is base colour, second is stripe colour