



Blue (/52) - PL-L, PL-S

PL-S 9W/52/2P 1CT/6X10BOX

By emitting light almost entirely within the 400 to 500 nm bandwidth and peaking at. 450 nm, Philips PL-L/PL-S color 52 lamps have no radiation from the short wave UVB. waveband. They are therefore suitable to be used in systems for applications such as Agriculture and Neonatal Jaundice Phototherapy

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take them to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information	
Cap-Base	G23
Life to 50% Failures (Nom)	8,000 hour(s)
Useful Life (Nom)	2,000 hour(s)
Light Technical	
Color Code	52
Luminous Flux	130 lm
Luminous Efficacy (rated) (Nom)	15 lm/W
UV Depreciation at 1000 h	20 %
Operating and Electrical	
Power Consumption	8.6 W
Lamp Current (Nom)	0.17 A
Voltage (Nom)	60 V

Mechanical and Housing	
Bulb Shape	2XT12
Net Weight (Piece)	32.000 g
Approval and Application	
Mercury (Hg) Content (Nom)	3.0 mg
Product Data	
Order product name	PL-S 9W/52/2P 1CT/6X10BOX
Full product name	PL-S 9W/52/2P 1CT/6X10BOX
Full product code	871150064471880
Order code	927901705203
Material Nr. (12NC)	927901705203
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500644718
Numerator - Packs per outer box	60

Blue (/52) - PL-L, PL-S


EAN/UPC - Case	8711500644732
----------------	---------------

Dimensional drawing



Product	D1 (max)	D (max)	A (max)	B (max)	C (max)
PL-S 9W/52/2P 1CT/6X10BOX	13 mm	28 mm	129 mm	144.5 mm	167.5 mm

Photometric data

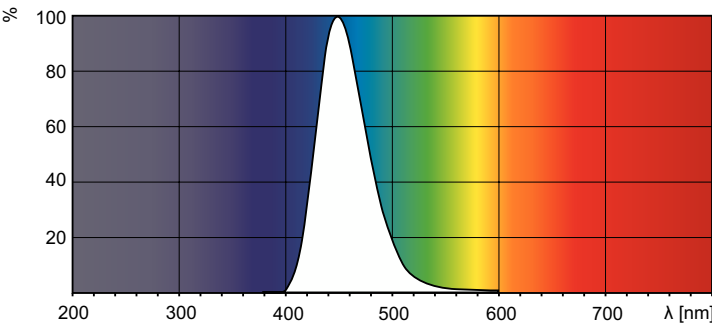

Spectral Power Distribution Colour - PL-S 9W/52/2P 1CT/6X10BOX

