

TECHNICAL DATA

Fluke TL1500DC Insulated Test Leads





Key features

- Measures voltage safely and accurately up to 1500 V DC
- CAT III 1500 V CAT IV 600 V with protective cap / CAT II 1500 V without protective cap, 10A
- Compatible with most Fluke clamp meters and multimeters
- Comes with one-year warranty
- 39.3 inches (1 meter) long

Product overview: Fluke TL1500DC Insulated Test Leads

The Fluke TL1500DC test leads provide safe and accurate voltage measurements up to 1500 V DC, commonly found in solar, wind, and battery applications. These insulated test leads made of PVC material are safety rated CAT III 1500 V, CAT IV 600 V with the protective cap and CAT II 1500 V without protective cap for use in different environments.

Specifications: Fluke TL1500DC Insulated Test Leads


Ratings:	IEC 61010-031 CAT II 1500 V, CAT III 1500 V, CAT IV 600 V, 10 A
Compatibility:	Compatible with all instruments that accept standard 4 mm shrouded banana plugs
Pollution:	Pollution Degree 2, 2000 m altitude
Environmental ratings:	Operating -10C to 50C



Storage: -20 °C to 60 °C @ < 80 % RH



Ordering information

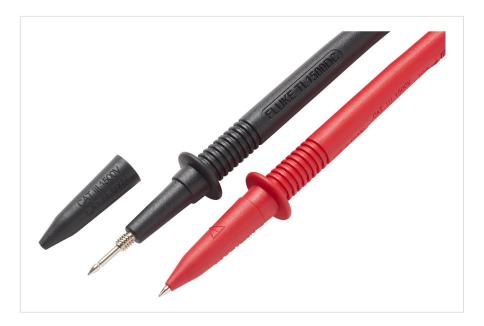

Fluke TL1500DC

Fluke TL1500DC Insulated Test Leads

Includes:

- One pair (red, black) TL1500DC Insulated Test Leads
- Two protective caps
- One-year warranty



Fluke. Keeping your world up and running. ${\it \$}$

Fluke (UK) Ltd.

52 Hurricane Way Norwich, Norfolk NR6 6JB United Kingdom

Tel.: +44 (0)20 7942 0708 E-mail: cs.uk@fluke.com www.fluke.com/en-gb ©2023 Fluke Corporation. All rights reserved. Data subject to alteration without notice. 05/2023

Modification of this document is not permitted without written permission from Fluke Corporation.