



TG5000

Timeguard 100W CCT3 IP65 Black Floodlight
High quality black aluminium body with 6mm toughened opal glass lens and angled mounting bracket


Features

- Colour and Wattage Adjustable LED floodlight solution for residential and commercial applications
- 100W, 150lm/W, CCT3 (3000K, 4000K, 5000K), Wattage adjustable (50W,75W,100W)
- Incorporates 100V-265V wide voltage replaceable driver
- IP65 rating for total protection against dust and low pressure jets of water from any direction
- Complete with 1.5m of cable

Dimensions

Weight:	1.8Kg
Height:	278mm
Width:	241mm
Depth:	46mm

Line Diagram(s)

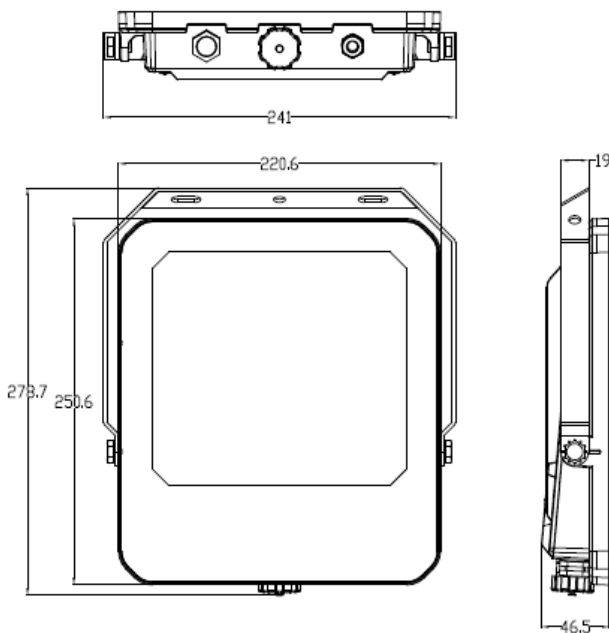

Technical Specification

Input Voltage	100-265V			
Frequency	50-60Hz			
Operating Current (a)	50W – 0.231 75W – 0.324 100W – 0.422			
Power Factor	50W – 0.87 75W – 0.93 100W – 0.95			
		3000K	4000K	5000K
Lumens	50W	5610	6050	6290
	75W	8150	8900	9100
	100W	10465	11600	11685
Lumens	50W	6800	7320	7350
Per Circuit Watt	75W	9850	10750	10875
	100W	12750	13980	14200
Efficiency	150LM/W			
Energy Rating	D			
IP Rating	IP65			
IK Rating	IK08			
Beam Angle	110°			
Construction	Diecast Aluminium / Toughened glass			
Insulation Class	Class I			
Operating Temperature	-20°C to +50°C			