



## NTM02

24 Hour/7 Day Compact Digital Module


### Features

- 28 ON/28 OFF Programmes Per Week
- Minimum Switching Time - 1 minute
- Extra Large 'Easy View' Screen with Blue LED Backlighting
- Red LED 'Mains ON' and green LED 'Output' indicators for easy viewing
- Self-Cancelling Override Button to Next Programme Change
- Optional 1 and 2 Hour Boost Button
- Automatic Summer/Winter Time Change

### Dimensions

Weight: 89g  
Height: 60mm  
Width: 60mm  
Depth: 34mm

### Line Diagram(s)

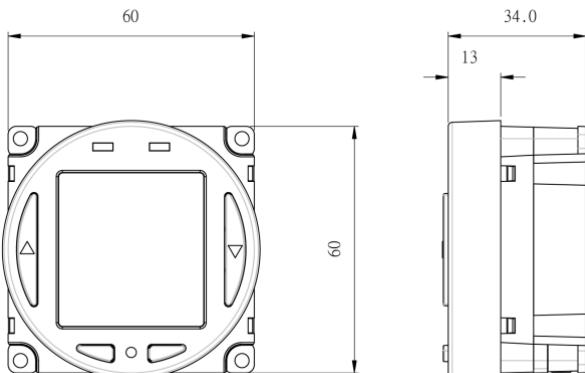

### Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	OEM (Panel Mount)
Earth Class Rating	Class II
Operating Temperature	0°C to 40°C
Setting Type	Digital
Battery Type	NiMH 1.2V 80mAh Rechargeable Battery
Power Reserve	672 Hours (28 Days)
Program Modes	24 Hour/7 Day, 1 Hour/2Hour Boost
Voltage Free Contacts	Normally Open, Normally Closed (Changeover)
Mounting Hole Centres (mm)	54
Standby Consumption	<0.96W
Number Of Channels	1
Switch Rating	16A Resistive, 4A Inductive, 1HP Motor, 750W Halogen/Fluorescent, 100W CFL, 100W LED
Shortest Switching Time	1 Minute
Programmable Slots	4 ON 4 OFF
Permanent ON Facility	Yes (Override ON)
Cable Entry(s)	Bottom Entry (Spade Connector)
Body Construction	Polycarbonate
Product Colour	White