



ST910

Suretime PIR Automatic Light Switch - 2 Wire


Features

- Motion Sensor PIR Light Switch - 2 Wire
- Adjustable Lux setting
- Red LED motion indication
- Supports single one-way switching only.
- Adjustable lux level to suit installation area.
- Adjustable on-time adjustment.
- Manual ON/OFF or AUTO slider switch.
- LED compatible (with use of the ZV900 load controller).
- Concealed controls for lux and light on time.
- DIP Switch: To enable or disable the Manual ON/OFF function.

Dimensions

Weight: 108g
 Height: 86mm
 Width: 86mm
 Depth: 49.5mm
 Protruding Depth: 32mm

Line Diagram(s)

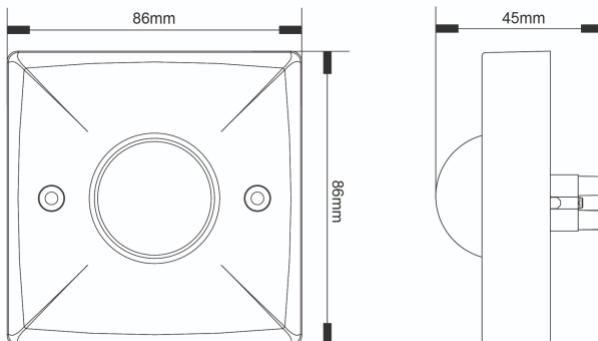

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface
Earth Class Rating	Class II
Operating Temperature	-20°C to 40°C
Ingress Protection Rating	IP40
Connection	2-Wire
Setting Type	Dial
Approved Mounting	1.1
Height (m)	
Back Box Minimum Depth (mm)	25
Motion Detection (m)	10 Front, 3 Side
Detection Angle	120°
Switch Type	One Way Switching
Mounting Hole Centres (mm)	60
Standby Consumption	<1W
Number Of Channels	1
Switch Rating	5W - 300W LED (With ZV900 Adapter), 300W Halogen, 18W - 150W Fluorescent (Low-loss or Electronic Ballast), 15W - 100W CFL
ON Time Adjustment	10 Seconds to 15 Minutes.
LUX Level	User Adjustable
Detection Range (m)	1 to 10
Permanent ON Facility	10 Front, 3 Side
Dusk Till Dawn	Yes (Slider Switch)
Multiple Unit Support	No
Cable Entry(s)	Single or Two-Way (Light Switch Only)
Body Construction	Back Entry
Product Colour	Polycarbonate
Accessories (Included)	White
	Screws