



STW360

Suretime Surface Mount 360° PIR


Features

- Surface mount PIR sensor suited for a wide array of indoor applications
- Manual override (Pulse) for extended light on times
- Adjustable time ON setting
- Adjustable lux level

Dimensions

Weight: 72g
 Height: 88mm
 Width: 88mm
 Depth: 50mm

Line Diagram(s)

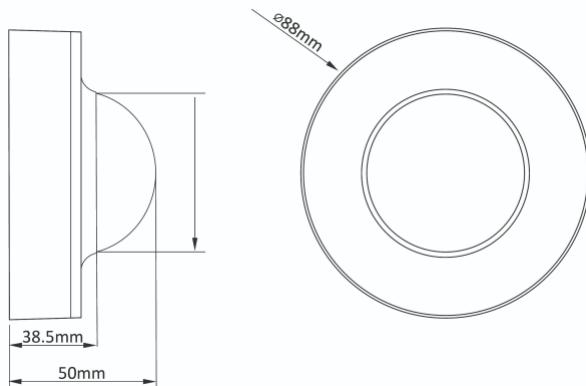

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface
Earth Class Rating	Class II
Operating Temperature	-20°C to 40°C
Ingress Protection Rating	IP40
Setting Type	Dial
Approved Mounting	2.5
Height (m)	
Motion Detection (m)	8 Diameter
Detection Angle	360°
Mounting Hole Centres (mm)	73
Standby Consumption	<1W
Number Of Channels	1
Switch Rating	200W LED, 1000W Halogen, 200W Fluorescent/Low Energy Lighting
ON Time Adjustment	3 Seconds to 18 Minutes. User Adjustable
LUX Level	10 to 1000
Detection Range (m)	8 Diameter
Permanent ON Facility	Yes (Pulse Override)
Dusk Till Dawn	No
Multiple Unit Support	Up to 5 Units in Parallel
Cable Entry(s)	Back Entry
Body Construction	Polycarbonate
Product Colour	White
Accessories (Included)	Fittings (Raw Plugs, Screws)