



TGBT6

Boostmaster 2 Hour Plug-In Electronic Boost Timer


Features

- Multiple boost times to choose from.
- Easy to use push button control.
- Boost times illuminated to track the time remaining before switching off.
- ON time can be increased in 4 steps: 0.25, 0.50, 1 and 2 hours.

Dimensions

Weight: 123g
 Height: 102mm
 Width: 55mm
 Depth: 46mm

Line Diagram(s)

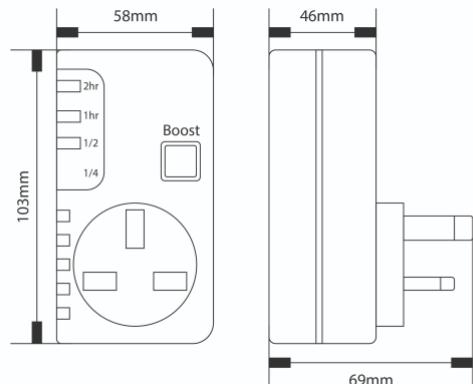

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Plug-in
Earth Class Rating	Class I
Operating Temperature	0°C to 40°C
Ingress Protection Rating	IP20
Setting Type	Button Press
Push Buttons	Yes (Boost Button)
Standby Consumption	<1W
Switch Rating	13A Resistive, 100W LED, 1000W Halogen, 500W Fluorescent
Shortest Switching Time	15 Minutes
Time Delay Range	15 Minutes to 2 Hours (1/4 Hour, 1/2 Hour, 1 Hour and 2 Hours)
Permanent ON Facility	No
Body Construction	Polycarbonate
Product Colour	White