



TRT031N

Electronic Frost Thermostat with Tamper Proof Cover


Features

- Easily adjustable dial with clearly marked temperature scale
- Frost protection against the risk of freezing pipes
- 5°C to 10°C set temperature range
- Tamper proof cover protects thermostat settings
- Temperature swing adjustment (using DIP switches) between a 0.5 °C and 1°C
- PID control
- Switch Type: Single pole, single throw (SPST)
- Surface mount with wall plate included

Dimensions

Weight: 160g
 Height: 86mm
 Width: 88mm
 Depth: 38mm

Line Diagram(s)

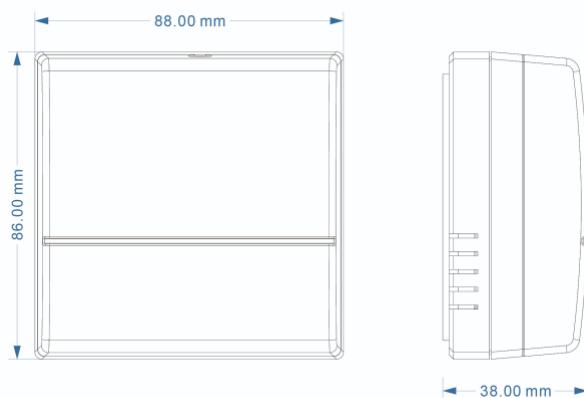

Technical Specification

| | |
|--------------------------------|--------------------------------------|
| Operating Voltage | 230V AC |
| Frequency | 50Hz |
| Installation Type | Surface |
| Earth Class Rating | Class II |
| Operating Temperature | 0°C to 40°C |
| Connection | 3 Wire |
| Setting Type | Dial |
| Set Temperature Range | 5°C to 10°C, User Adjustable |
| ERP Product Class | Class 1 |
| Boiler Type | 3CYC (Gas) or 6CYC (Oil) |
| Temperature Swing (Hysteresis) | Dip Switch Adjustable |
| PID Control | 1°C or 0.5°C |
| Switch Type | Supported (ON/OFF Switchable) |
| Mounting Hole Centres (mm) | Single Pole, Single Throw (SPST) |
| Standby Consumption | 60 |
| Switch Rating | <4W |
| Body Construction | 6A Resistive, 2A Inductive |
| Product Colour | Polycarbonate |
| Accessories (Included) | White |
| | Raw Plugs, Screws, Tamperproof Cover |