



## TRT032N

### Tamper Proof Room Thermostat


#### Features

- Easily adjustable dial with clearly marked temperature scale
- Tamper proof cover protects thermostat settings
- Frost Protection
- Temperature swing adjustment (using DIP switches) between a 0.5 °C and 1°C
- PID control
- Switch Type: Single pole, single throw (SPST)
- Surface mount with wall plate included

#### Dimensions

Weight: 163g  
 Height: 86mm  
 Width: 88mm  
 Depth: 40mm

#### Line Diagram(s)

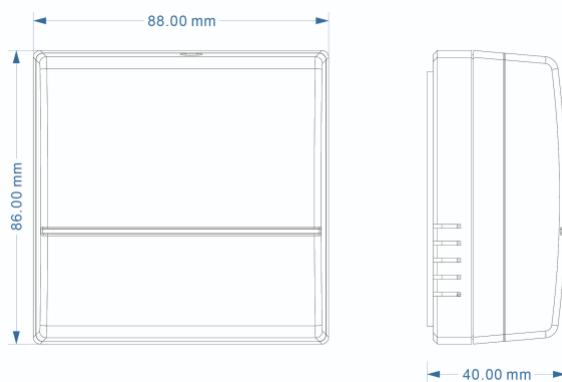

#### Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface
Earth Class Rating	Class II
Operating Temperature	0°C to 40°C
Connection	3 Wire
Setting Type	Dial
Set Temperature Range	5°C to 30°C, User Adjustable
ERP Product Class	Class 1
Boiler Type	3CYC (Gas) or 6CYC (Oil)
Temperature Swing (Hysteresis)	Dip Switch Adjustable
PID Control	1°C or 0.5°C
Switch Type	Supported (ON/OFF Switchable)
Mounting Hole Centres (mm)	Single Pole, Single Throw (SPST)
Standby Consumption	60
Switch Rating	<4W
Cable Entry(s)	6A Resistive, 2A Inductive
Body Construction	Back Entry
Product Colour	Polycarbonate
Accessories (Included)	White
	Raw Plugs, Screws, Tamperproof Cover