



TRT037N

Wireless 7 Day Programmable Room Thermostat


Features

- Wire free installation from thermostat to receiver control
- Up to 60m transmission range depending on installation
- 6 different time/temperature periods
- Easy +/- illuminated push button settings
- Easy view time and temperature display illuminates on setting
- Output light red LED
- Frost protection setting
- Voltage free change over contacts
- Optimum start feature (up to temperature at the time the programme is due to start)
- Display battery powered using x2 AA batteries supplied

Dimensions

Weight: TX Unit: 179g
RX Unit: 134.7g
Height: 90mm
Width: TX Unit: 135mm
RX Unit: 95mm
Depth: 30mm

Line Diagram(s)

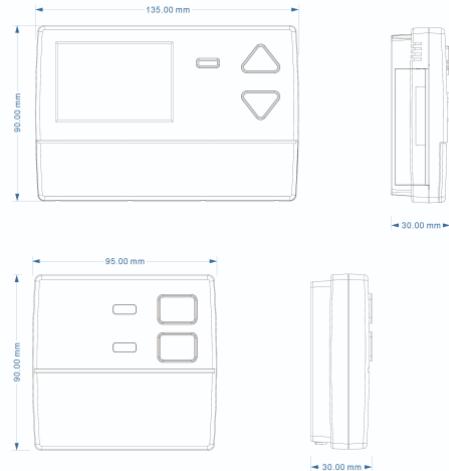

Technical Specification

Operating Voltage	230V AC: RX Unit
Frequency	50Hz
Installation Type	Surface
Earth Class Rating	Class II (RX Unit), Class III (TX Unit)
Operating Temperature	0°C to 40°C
Connection	3 Wire
Setting Type	Digital
Battery Type	x2 AA Batteries (TX Unit)
Power Reserve	Depends on usage
Set Temperature Range	5°C to 35°C, User Adjustable
ERP Product Class	Class IV
Temperature Swing (Hysteresis)	1°C or 0.5°C
Optimum Start	Supported
Program Modes	24 Hour/7 Day, Frost Protection Mode
Switch Type	Single Pole
Voltage Free Contacts	Normally Open, Normally Closed (Changeover)
Mounting Hole Centres (mm)	60
Standby Consumption	TX: <0.1mW RX: <6W
Switch Rating	3A Resistive, 1A Inductive
Programmable Slots	6 Programmed Temperature Periods (Per Day)
Cable Entry(s)	Back Entry
Body Construction	Polycarbonate
Product Colour	White
Accessories (Included)	Raw Plugs, Screws, x2 AA Batteries