



PDFMMINIL

360° Flush Mount Linkable Mini PIR Sensor


Features

- Designed For Corridor and Multi-Zone Use
- Mini unobtrusive design
- 360° Detection
- Twist & Lock Design For Easy Access
- Up To 5 Slaves Can Be Added To 1 Master. Pre- Wired RJ11 Plug-in Slave Units For Quick Installation
- LUX Adjustment
- Time Adjustment For Slave Units Set Via Master Only
- Termination Box For Ease Of Wiring
- Masking Kit Included
- LED movement indicator

Dimensions

Weight:	140g
Height:	PIR: 47mm
	Power Box: 35mm
Width:	PIR: 47mm
	Power Box: 175mm
Depth:	PIR: 64mm
	Power Box: 35mm

Line Diagram(s)

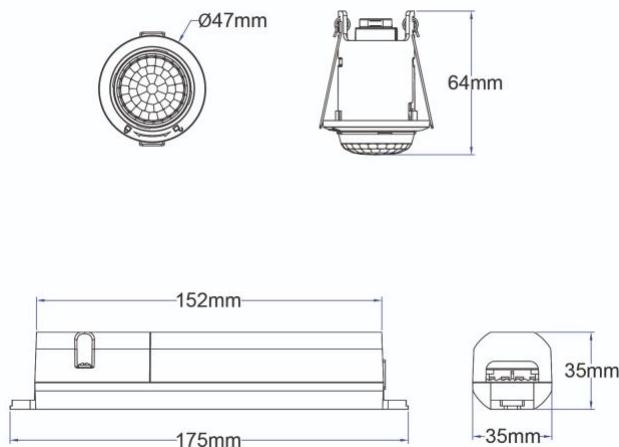

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Flush Mount
Operating Temperature	-20°C to 40°C
Ingress Protection Rating	IP40
Setting Type	Dial
Approved Mounting Height (m)	2.5
Presence Detection (m)	3 Diameter
Motion Detection (m)	8 Diameter
Detection Angle	360°
Hole Cut-Out Size (mm)	40
Standby Consumption	<0.5W
Number Of Channels	1
Detection Range (m)	8 Diameter
Permanent ON Facility	Yes (Pulse Override)
Dusk Till Dawn	No
Multiple Unit Support	Up to 5 PDFMMINILS (Slave PIRs)
Body Construction	Polycarbonate
Product Colour	White
Earth Class Rating	Class II (Power Box), Class III (PIRs)
Switch Rating	250W
ON Time Adjustment	LED/CFL/Fluorescent, 2300W Halogen
LUX Level	30 Sec, 2m, 5m, 10m, 15m, 30m. User Adjustable
Cable Entry(s)	10 to 2000
Accessories (Optional)	Side Entry (Power Box) PDFMINILS (Slave PIR)