




Features

- Designed For Corridor and Multi-Zone Use
- Mini unobtrusive design
- Up to 5 Plug & Play slave units can be added
- Imitates the settings of the master PIR (PDFMMINIL)
- Pre-installed 5 Mtr Lead

Dimensions

Weight: 104g
Height: 47mm
Width: 47mm
Depth: 64mm

Line Diagram(s)

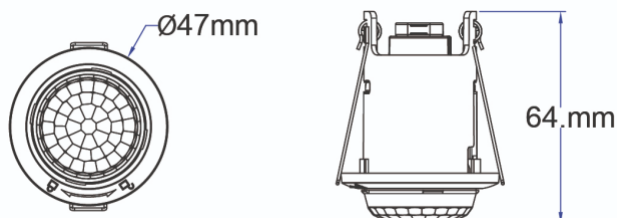

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Flush Mount
Earth Class Rating	Class III
Operating Temperature	-20°C to 40°C
Ingress Protection Rating	IP40
Setting Type	Dial
Approved Mounting Height (m)	2.5
Presence Detection (m)	3 Diameter
Motion Detection (m)	8 Diameter
Detection Angle	360°
Hole Cut-Out Size (mm)	40
Standby Consumption	<0.5W
Number Of Channels	1
Switch Rating	Imitates the settings of the master PIR (PDFMMINIL)
Detection Range (m)	8 Diameter
Permanent ON Facility	Yes (Pulse Override)
Dusk Till Dawn	No
Multiple Unit Support	Up to 5 PDFMMINILS (Slave PIRs)
Cable Entry(s)	RJ45 Loop Connection (PIR)
Body Construction	Polycarbonate
Product Colour	White
Accessories (Optional)	PDFMINILS (Slave PIR)