



2300W PIR Light Controller

Range

| | |
|---------|------------------------------------|
| SLB2300 | 2300W PIR Light Controller – Black |
| SLW2300 | 2300W PIR Light Controller – White |


Features

- Pan and tilt feature
- Light ON times adjustable
- LUX (light level) adjustment – Day to Night
- Manual ON/OFF switching override
- IP55 weatherproof rating
- Simple and quick to fit terminal block connectors
- Corner mounting bracket available – SLBCB (Sold Separately)

Dimensions

| | Height (mm) | Width (mm) | Depth (mm) | Weight (g) |
|---------|----------------|---------------|---------------|---------------|
| SLB2300 | 95 | 78 | 141 | 193 |
| SLW2300 | 95 | 78 | 141 | 193 |

Line Diagram(s)

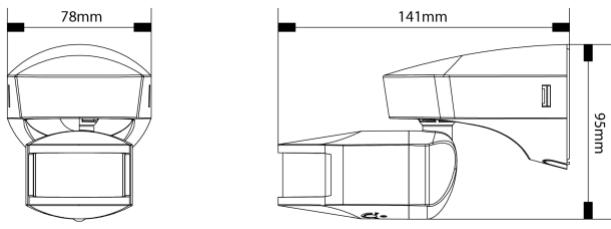

Technical Specification

| | |
|------------------------------|---|
| Operating Voltage | 230V AC |
| Frequency | 50Hz |
| Installation Type | Surface |
| Earth Class Rating | Class I |
| Operating Temperature | -20°C to 40°C |
| Ingress Protection Rating | IP55 |
| Setting Type | Dial |
| Approved Mounting Height (m) | 2.5 |
| Motion Detection (m) | 12 |
| Detection Angle | 180° |
| Pan & Tilt Adjustment | 90° Left/Right from Centre, Tilt 15° (Up), 60° (Down) |
| Mounting Hole Centres (mm) | 50 |
| Standby Consumption | <1W |
| Number Of Channels | 1 |
| Switch Rating | 250W LED, 500W Fluorescent, 2300W Halogen |
| ON Time Adjustment | 5 Seconds to 15 Minutes. User Adjustable |
| LUX Level | 5 to 1000 |
| Detection Range (m) | 12 |
| Permanent ON Facility | Yes (Pulse Override) |
| Dusk Till Dawn | No |
| Multiple Unit Support | Up to 4 Units in Parallel |
| Cable Entry(s) | Back Entry, Bottom Entry |
| Body Construction | Polycarbonate |
| Accessories (Included) | Fittings (Raw Plugs, Screws) |