



Suretime Flush Mount 360 Degree PIR

Range

STFM360
STFMMINI

Suretime Flush Mount 360 Degree PIR
Suretime Mini Flush Mount 360 Degree PIR

Features


- Flush mount PIR sensor suited for a wide array of indoor applications
- Manual override (Pulse) for extended light on times
- Adjustable time ON setting
- Adjustable lux level

Dimensions


	Height (mm)	Width (mm)	Depth (mm)	Weight (g)
STFM360	76.5	82	82	86
STFMMINI	73	50	50	51

Line Diagram(s)

STFM360:

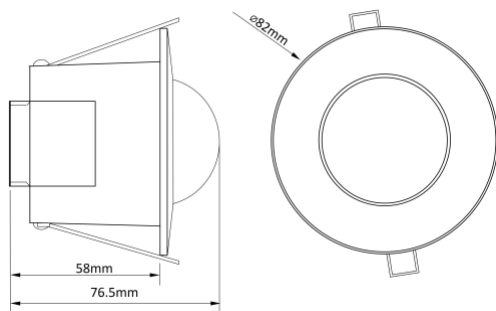

STFMMINI:

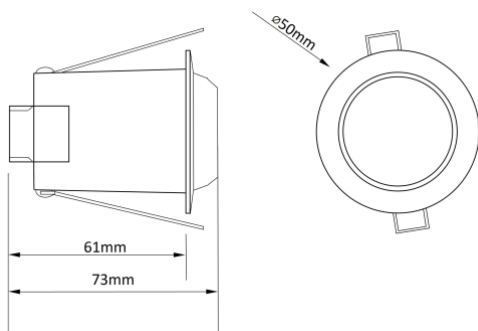

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Flush Mount
Earth Class Rating	Class II
Operating Temperature	-20°C to 40°C
Ingress Protection Rating	IP44
Setting Type	Dial
Approved Mounting Height (m)	3
Motion Detection (m)	6 Diameter
Detection Angle	360°
Hole Cut-Out Size (mm)	40
Standby Consumption	<1W
Number Of Channels	1
Switch Rating	200W LED, 1000W Halogen, 200W Fluorescent/Low Energy Lighting
ON Time Adjustment	3 Seconds to 18 Minutes. User Adjustable
LUX Level	10 to 1000
Detection Range (m)	6 Diameter
Permanent ON Facility	Yes (Pulse Override)
Dusk Till Dawn	No
Multiple Unit Support	Up to 5 Units in Parallel
Cable Entry(s)	Back Entry
Body Construction	Polycarbonate
Product Colour	White
Accessories (Included)	Cover, Screws