



Suretime Outdoor PIR

Range

STLB1000	Suretime Outdoor PIR Black
STLW1000	Suretime Outdoor PIR White


Features

- Manual override (Pulse) for extended light on times.
- Adjustable time ON setting.
- Adjustable lux level.
- Knockouts to allow cable entry from underneath the PIR.

Dimensions

	Height (mm)	Width (mm)	Depth (mm)	Weight (g)
STLB1000	76	76	87	119
STLW1000	76	76	87	119

Line Diagram(s)

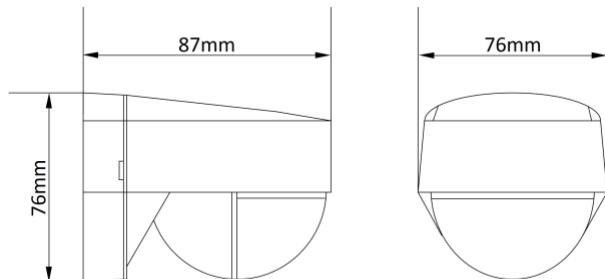

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface
Earth Class Rating	Class II
Operating Temperature	-20°C to 40°C
Ingress Protection Rating	IP55
Setting Type	Dial
Approved Mounting Height (m)	2.5
Motion Detection (m)	8 to 12
Detection Angle	180°
Mounting Hole Centres (mm)	58
Standby Consumption	<1W
Number Of Channels	1
Switch Rating	200W LED, 1000W Halogen, 200W Fluorescent/Low Energy Lighting
ON Time Adjustment	3 Seconds to 18 Minutes. User Adjustable
LUX Level	10 to 1000
Detection Range (m)	8 to 12
Permanent ON Facility	Yes (Pulse Override)
Dusk Till Dawn	No
Multiple Unit Support	Up to 5 Units In Parallel
Cable Entry(s)	Back Entry, Bottom Entry
Body Construction	Polycarbonate
Product Colour	Black
Accessories (Included)	Fittings (Raw Plugs, Screws)