



Digital Boost Timer with Countdown Display

Range

TGBD2	2 Hour Digital Boost Timer With Countdown Display
TGBD4	4 Hour Digital Boost Timer With Countdown Display


Features

- Boost button with backlight disable feature
- Ideal for immersion heaters, room heaters, towel rails and lighting.
- Replaces existing single gang connection unit fixed appliance outlets.
- Multiple on times can be selected and viewed via the clear LED output display panel.
- Easy push button selection.
- Fits a standard flush or surface mount BS wall box.

Dimensions

	Height (mm)	Width (mm)	Depth (mm)	Weight (g)
TGBD2	85	85	36	131
TGBD4	85	85	36	131

Line Diagram(s)

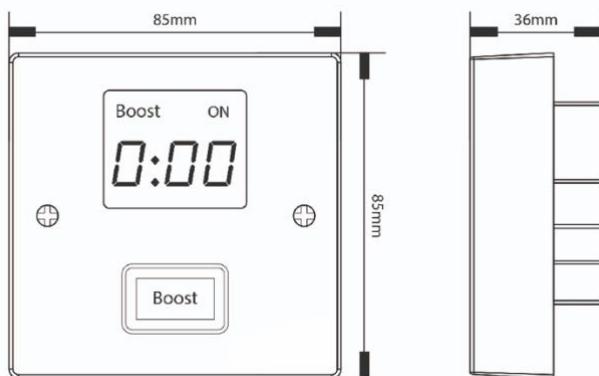

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface
Earth Class Rating	Class II
Operating Temperature	0°C to 45°C
Ingress Protection Rating	IP20
Setting Type	Digital
Back Box Minimum Depth (mm)	25
Push Buttons	Yes (Boost Button)
Mounting Hole Centres (mm)	60
Standby Consumption	<1.3W
Number Of Channels	1
Switch Rating	13A Resistive, 200W LED, 1000W Halogen, 500W Fluorescent, 100W CFL
Shortest Switching Time	TGBD2: 15 Minutes TGBD4: 30 Minutes
Time Delay Range	TGBD2: 15 Minutes to 2 Hours (With 15 Minute Increments) TGBD4: 30 Minutes to 4 Hours (With 30 Minute Increments)
Permanent ON Facility	No
Multiple Unit Support	No
Cable Entry(s)	Back Entry, Bottom Entry
Body Construction	Polycarbonate
Product Colour	White
Accessories (Included)	Screws