



LED Step Light – Dark Grey

Range

LED4SL4DG	1.1W Square LED Step Light – Dark Grey
LED4SL1DG	1.6W Horizontal LED Step Light – Dark Grey
LED4SL9DG	3.8W Horizontal LED Step Light – Dark Grey

Features


- Quick and easy installation, with no wall channelling required
- A powerful and energy saving alternative to standard step lights
- Surface mount for quick and easy installation – no back box required
- Robust polycarbonate construction suitable for industrial, commercial and home installations
- IP65 weatherproof rating for indoor and outdoor use
- LED light emits downwards, ideal for illuminating steps, passageways and corridors or for decorative lighting

Dimensions


	Height (mm)	Width (mm)	Depth (mm)	Weight (g)
LED4SL4DG	125	125	27	176
LED4SL1DG	230	80	27	218
LED4SL9DG	80	220	36	197

Line Diagram(s)

LED4SL4DG:

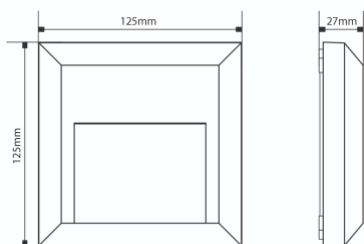

LED4SL1DG:

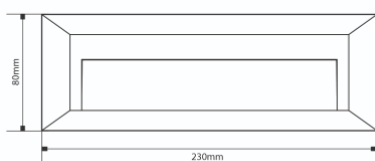

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface Mount
Earth Class Rating	Class II
Operating Temperature	-20°C to 55°C
Ingress Protection Rating	IP65
Wattage	LED4SL4DG: 1.1 LED4SL1DG: 1.6 LED4SL9DG: 3.8
Beam Angle	LED4SL4DG: 45° LED4SL1DG: 30° LED4SL9DG: 50°
Energy Efficiency	Class G
Energy Usage	LED4SL4DG: 1.1kWh/1000H LED4SL1DG: 1.6kWh/1000H LED4SL9DG: 3.8kWh/1000H
Lumen Output (lm)	LED4SL4DG: 40 LED4SL1DG: 67 LED4SL9DG: 245
Luminaire Efficiency	LED4SL4DG: 36 lm/W LED4SL1DG: 42 lm/W LED4SL9DG: 64 lm/W
Colour Temperature (K)	4000
LED Type	SMD (On LED Plate)
Mounting Hole Centres (mm)	LED4SL4DG: 102 Left to Right, 102 Top to Bottom LED4SL1DG: 207 Left to Right, 58 Top to Bottom LED4SL9DG: 202 Left to Right, 64 Top to Bottom
Multiple Unit Support	Yes
Cable Entry(s)	Back Entry
Body Construction	Polycarbonate
Product Colour	Dark Grey
Accessories (Included)	Fittings (Raw Plugs, Screws)

LED4SL9DG:

