



NTT03

24 Hour/7 Day Compact Electronic Immersion Heater Timeswitch


Features

- 4 ON/4 OFF Programme Periods Per Day, Up To 28 ON/28 OFF Programmes Per Week
- Shortest Switching Time 1 Min
- Extra Large 'Easy View' Screen with Blue LED Backlighting
- Red LED 'Mains ON' and Green LED 'Output'
- Large Programme Buttons
- Self-Cancelling Override Button to Next Programme Change
- Optional 1 and 2 Hour Boost Button
- Automatic Summer/Winter Time Change
- Rechargeable Memory Back-Up
- Fits a Standard Flush or Surface Mount Box Min 32mm

Dimensions

Weight: 172g
Height: 92mm
Width: 92mm
Depth: 59mm

Line Diagram(s)

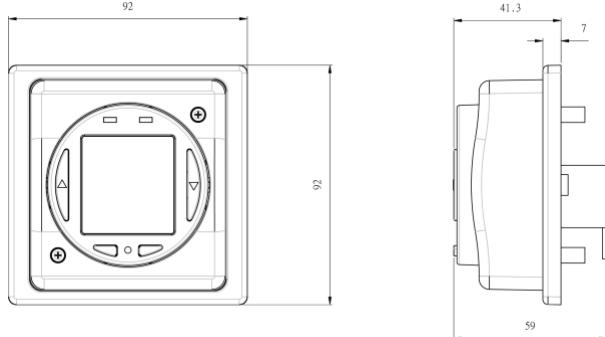

Technical Specification

| | |
|-----------------------------------|---|
| Operating Voltage | 230V AC |
| Frequency | 50Hz |
| Installation Type | Surface Mount |
| Earth Class Rating | Class II |
| Operating Temperature | 0°C to 40°C |
| Ingress Protection Rating | IP20 |
| Setting Type | Digital |
| Battery Type | NiMH 1.2V 80mAh Rechargeable Battery |
| Power Reserve | 672 Hours (28 Days) |
| Back Box Minimum Depth (mm) | 32 |
| Program Modes | 24 Hour/7 Day, 1 Hour/2Hour Boost |
| Mounting Hole Centres (mm) | 60 |
| Standby Consumption | <0.96W |
| Number Of Channels | 1 |
| Switch Rating | 16A Resistive , 2400W Halogen, 750W Fluorescent, 100W CFL, 100W LED |
| Shortest Switching Time | 1 Minute |
| Programmable Slots | 4 ON 4 OFF |
| Permanent ON Facility | Yes (Override ON) |
| Cable Capacity (mm ²) | 1.5 - 2.5mm ² Flexible Cable |
| Cable Entry(s) | Back Entry |
| Body Construction | Polycarbonate |
| Product Colour | White |
| Accessories (Included) | Fittings (Raw Plugs, Screws) |