



NTT04

24 Hour/7 Day Compact Electronic General Purpose Timeswitch with Voltage Free Contacts


Features

- 4 ON/4 OFF Programme Periods Per Day, Up To 28 ON/28 OFF Programmes Per Week
- Shortest Switching Time 1 Min
- Extra Large 'Easy View' Screen with Blue LED Backlighting
- Red LED 'Mains ON' and Green LED 'Output'
- Large Easy Push Programme Buttons
- Self-Cancelling Override Button To Next Programme Change
- Optional 1 & 2 Hour Boost Button Automatic Summer/Winter Time Change
- Rechargeable Battery Back-up
- Fits a Standard Flush Or Surface Mount Box Min 32mm
- Volt Free Contacts

Dimensions

Weight: 168g
Height: 92mm
Width: 92mm
Depth: 59mm

Line Diagram(s)

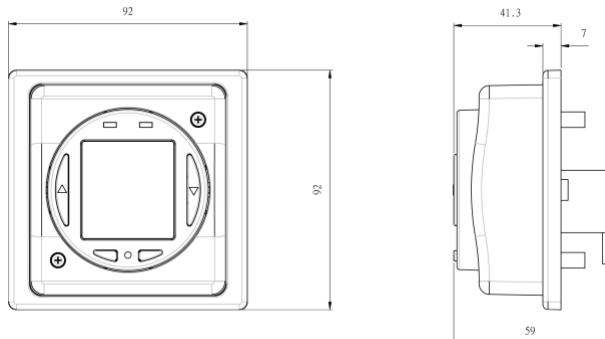

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface Mount
Earth Class Rating	Class II
Operating Temperature	0°C to 40°C
Ingress Protection Rating	IP20
Setting Type	Digital
Battery Type	NiMH 1.2V 80mAh Rechargeable Battery
Back Box Minimum Depth (mm)	32
Program Modes	24 Hour/7 Day, 1 Hour/2Hour Boost
Voltage Free Contacts	Normally Open
Mounting Hole Centres (mm)	60
Standby Consumption	<0.96W
Number Of Channels	1
Switch Rating	16A Resistive, 2400W Halogen, 750W Fluorescent, 100W CFL, 100W LED
Shortest Switching Time	1 Minute
Programmable Slots	4 ON 4 OFF
Permanent ON Facility	Yes (Override ON)
Cable Capacity (mm ²)	1.5 - 2.5mm ² Flexible Cable
Cable Entry(s)	Back Entry
Body Construction	Polycarbonate
Product Colour	White
Accessories (Included)	Fittings (Raw Plugs, Screws)