



NTT05

24 Hour Slimline General Purpose Timeswitch


Features

- 96 Quick-Set Segments for up to 48 ON/48 OFF Programmes Per 24 Hrs
- Red LED 'Mains ON' & Green LED 'Output'
- 'Traffic Light' Slide Switch for Easy ON (green), Auto (green & red) and OFF (red) Mode Indication
- Switches ON & OFF At Preset Times
- Captive Segment Dial
- Permanent ON/OFF Control
- Voltage Free Contacts

Dimensions

Weight: 197g
 Height: 120mm
 Width: 74mm
 Depth: 47mm

Line Diagram(s)

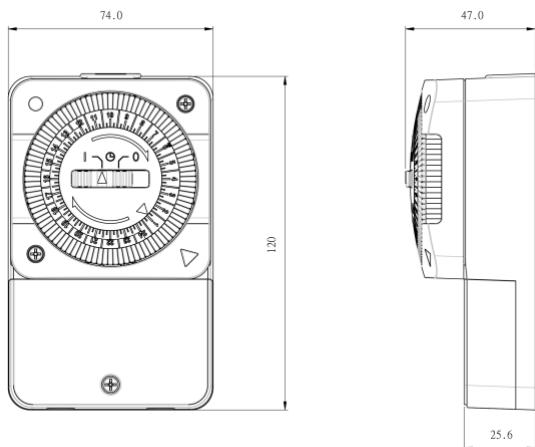

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface Mount
Earth Class Rating	Class I
Operating Temperature	0°C to 40°C
Ingress Protection Rating	IP20
Setting Type	Segment
Program Modes	24 Hour
Voltage Free Contacts	Normally Open, Normally Closed (Changeover)
Mounting Hole Centres (mm)	90
Standby Consumption	<1.43W
Number Of Channels	1
Switch Rating	16A Resistive, 750W Halogen/Fluorescent, 100W bCFL, 100W LED
Shortest Switching Time	15 Minute
Programmable Slots	48 ON 48 OFF (96 Segments)
Permanent ON Facility	Yes (Slider Switch)
Cable Capacity (mm ²)	1.5 - 2.5mm ² Flexible Cable
Cable Entry(s)	Back Entry (Knockouts), Bottom Entry
Body Construction	Polycarbonate
Product Colour	White
Accessories (Included)	Fittings (Raw Plugs, Screws)