



NTT06

24 Hour Slimline Electronic General Purpose Timeswitch


Features

- Extra Large Screen With Blue LED Backlighting
- Red LED 'Mains ON' and Green LED 'Output' Indicators For Easy Viewing
- Large Programme Buttons
- Self-Cancelling Override Button To Next Programme Change
- Optional 1 & 2 Hour Boost Button
- Automatic Summer/Winter Time Change
- Rechargeable Battery back-up
- 4 ON/4 OFF easy-set programme periods per day

Dimensions

Weight: 211g
 Height: 120mm
 Width: 74mm
 Depth: 46mm

Line Diagram(s)

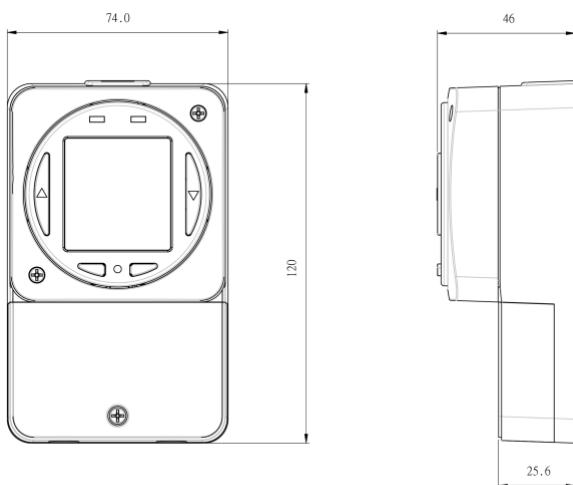

Technical Specification

Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface Mount
Earth Class Rating	Class I
Operating Temperature	0°C to 40°C
Ingress Protection Rating	IP20
Setting Type	Digital
Battery Type	NiMH 1.2V 80mAh Rechargeable Battery
Power Reserve	672 Hours (28 Days)
Program Modes	24 Hour, 1 Hour/2Hour Boost
Voltage Free Contacts	Normally Open, Normally Closed (Changeover)
Mounting Hole Centres (mm)	90
Standby Consumption	<0.96W
Number Of Channels	1
Switch Rating	16A Resistive, 2400W Halogen, 750W Fluorescent, 100W CFL, 100W LED
Shortest Switching Time	1 Minute
Programmable Slots	4 ON 4 OFF
Permanent ON Facility	Yes (Override ON)
Cable Capacity (mm ²)	1.5 - 2.5mm ² Flexible Cable
Cable Entry(s)	Back Entry (Knockouts), Bottom Entry
Body Construction	Polycarbonate
Product Colour	White
Accessories (Included)	Fittings (Raw Plugs, Screws)