

TIMEGUARD®

In-Line IP68 Connector – 16A

Model: WXT68IL16



Installation & Operating Instructions


Installation instructions




Isolate mains power supply before commencing.

If in doubt consult a qualified electrician.

Step 1

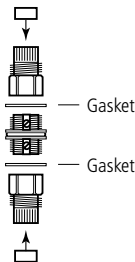

Note: Please observe the correct polarity when wiring.



Min. cable diameter 5mm.
Max. cable diameter 8mm.

Step 2




3 Poles



L - L (brown)



N - N (blue)

⊕ - ⊕ (yellow/green)



Note: When stripping the cables please use the measurements shown.


Step 3

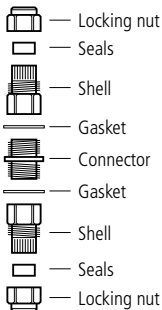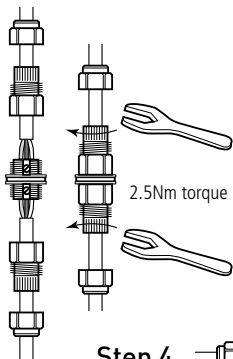

Step 4



Step 5



Ratings:

Current: 16A.

Voltage: 230V AC 50Hz.

Temperature: -20° to 85°C.

Dimensions: 77 x 24 x 24mm.

If you experience problems, do not immediately
return the unit to the store.

Telephone the Timeguard Customer Helpline:

HELPLINE
01582 544 548

or email helpline@timeguard.com

Qualified Customer Support Coordinators will be online
to assist in resolving your query.



Deta Electrical Co Ltd
Panattoni Park, Luton Road,
Chalton, Bedfordshire, LU4 9TT
Sales Office: 020 8452 1112
or email csc@timeguard.com
www.timeguard.com