

TIMEGUARD®

IP68 'T' Connector 20A

Model: WXT68T20



Installation & Operating Instructions


Installation instructions




Isolate mains power supply before commencing.

If in doubt consult a qualified electrician.


Step 1



Step 2




Step 3

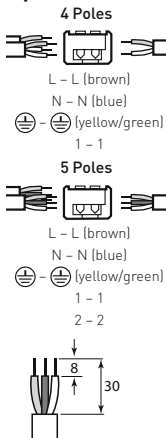

Min. cable diameter 5mm.
Max. cable diameter 8mm.


Note: When stripping the cables please use the measurements shown.

Step 4

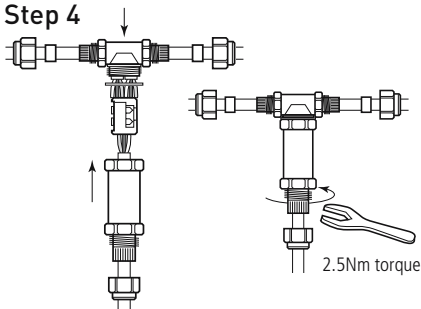


2

Step 5



Step 6



Ratings:

Current: 20A.

Voltage: 230V AC 50Hz.

Temperature: -20° to 85°C.

Dimensions: 95 x 115 x 32mm.

Note: Please observe the correct polarity when wiring.

If you experience problems, do not immediately
return the unit to the store.

Telephone the Timeguard Customer Helpline:

HELPLINE
01582 544 548

or email helpline@timeguard.com

Qualified Customer Support Coordinators will be online
to assist in resolving your query.



Deta Electrical Co Ltd
Panattoni Park, Luton Road,
Chalton, Bedfordshire, LU4 9TT
Sales Office: 020 8452 1112
or email csc@timeguard.com
www.timeguard.com