

TIMEGUARD®

IP68 Junction Box

Model: WXT68JB25







Installation & Operating Instructions

Installation instructions




Isolate mains power supply before commencing.


If in doubt consult a qualified electrician.

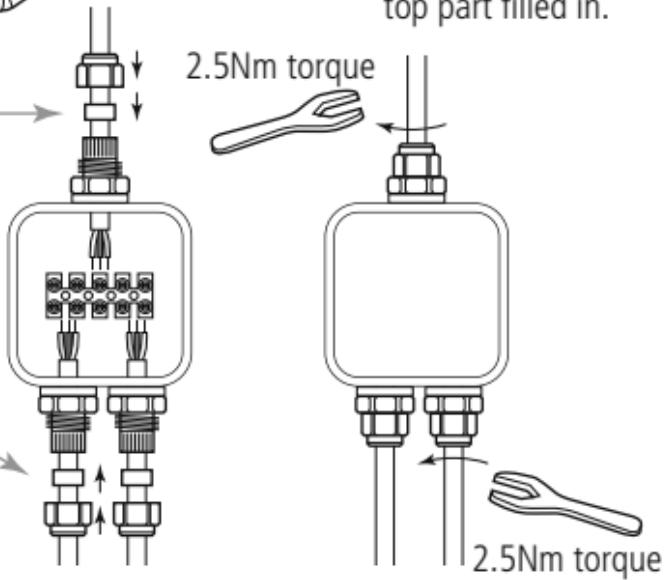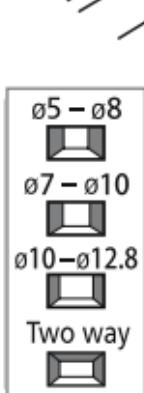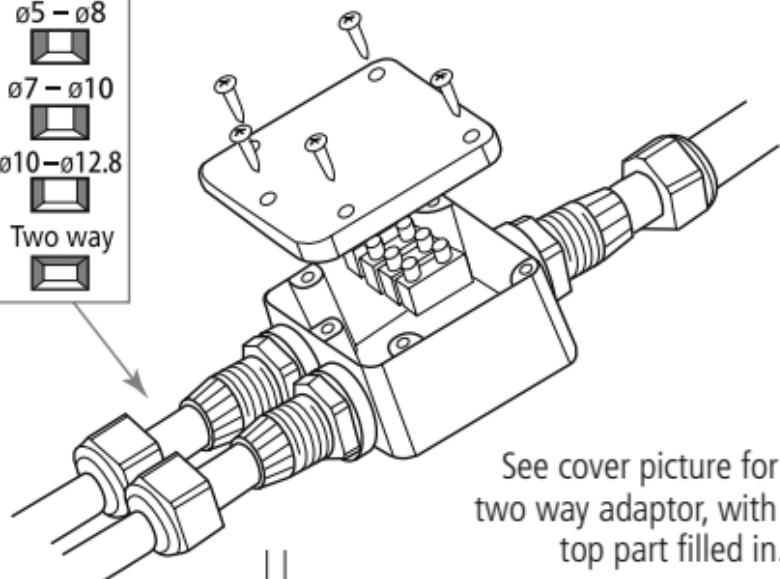

3 Poles

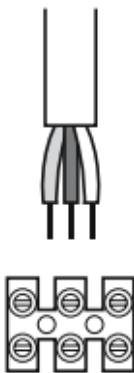

5 Poles

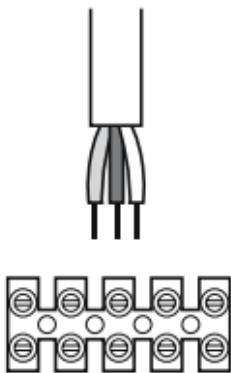

2

Note: When stripping the cables please use the measurements shown.

Min. cable diameter 5mm.
Max. cable diameter 8mm.


Ratings:

Current: 25A.

Voltage: 230V AC 50Hz.

Temperature: -20° to 85°C.

Dimensions: 138 x 72 x 40mm.



Note: Please observe the correct polarity when wiring.

If you experience problems, do not immediately
return the unit to the store.

Telephone the Timeguard Customer Helpline:

**HELPLINE
01582 544 548**

or email helpline@timeguard.com

Qualified Customer Support Coordinators will be online
to assist in resolving your query.



Deta Electrical Co Ltd
Panattoni Park, Luton Road,
Chalton, Bedfordshire, LU4 9TT
Sales Office: 020 8452 1112
or email csc@timeguard.com

www.timeguard.com