

Product datasheet

Specifications



analog output module Modicon Quantum - 8 O multirange

Local distributor code:

395515695

140ACO13000

⚠ Discontinued on: 17 Apr 2025

⚠ To be end-of-service on: 31 Dec 2030

⚠ Discontinued - Service only

EAN Code: 3595861148017

Main

Range of product	Modicon Quantum automation platform
Product or component type	Analogue output module

Complementary

Analogue output number	8
Addressing requirement	8 output words
Loop voltage	6...30 V DC
Maximum voltage drop	<30 V 25 mA
Analogue output range	0...20 mA 0...20000 counts 0...25 mA 0...25000 counts 4...20 mA 0...16000 counts 4...20 mA 0...4095 counts
Absolute accuracy error	+/- 0.2 % of full scale at 25 °C
Linearity	+/- 12 µA 4...20 mA 0...4095 counts +/- 4 µA 0...20 mA 0...20000 counts +/- 4 µA 0...25 mA 0...25000 counts +/- 4 µA 4...20 mA 0...16000 counts
Accuracy drift according to temperature	0.004 % of full scale/°C typical 0.007 % of full scale/°C maximum
Isolation between channels and bus	1780 V for 1 minute AC
Update time	5 ms
Setting time	3.2 ms to +/-0.1% of the final value 1.6 ms to 5% of the final value
Fault type	Open circuit 4...20 mA
Bus current requirement	550 mA
Maximum power dissipation in W	5 W
External power requirement	6...30 V
Marking	CE
Local signalling	1 LED (green) for bus communication is present (Active) 1 LED (red) for external fault 8 LEDs (green) for channel is turned on 8 LEDs (red) for channel fault
Module format	Standard
Net weight	0.3 kg

Environment

Product certifications	cUL FM Class 1 Division 2
Standards	UL 508 CSA C22.2 No 142
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.800 cm
Package 1 Width	16.700 cm
Package 1 Length	31.500 cm
Package 1 Weight	438.000 g

Contractual warranty

Warranty	18 months
-----------------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances


[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

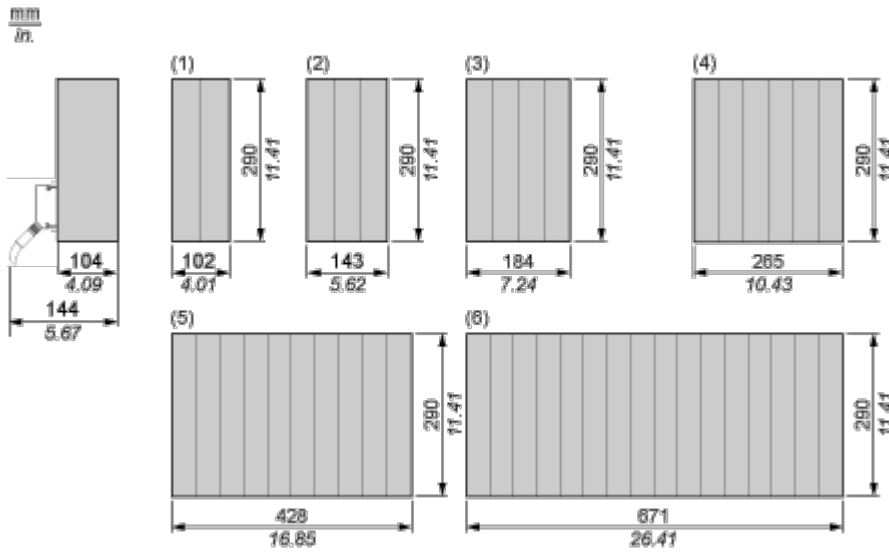


- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Connections and Schema

High Density Analog Output Module (8-Channel)

Wiring Diagram

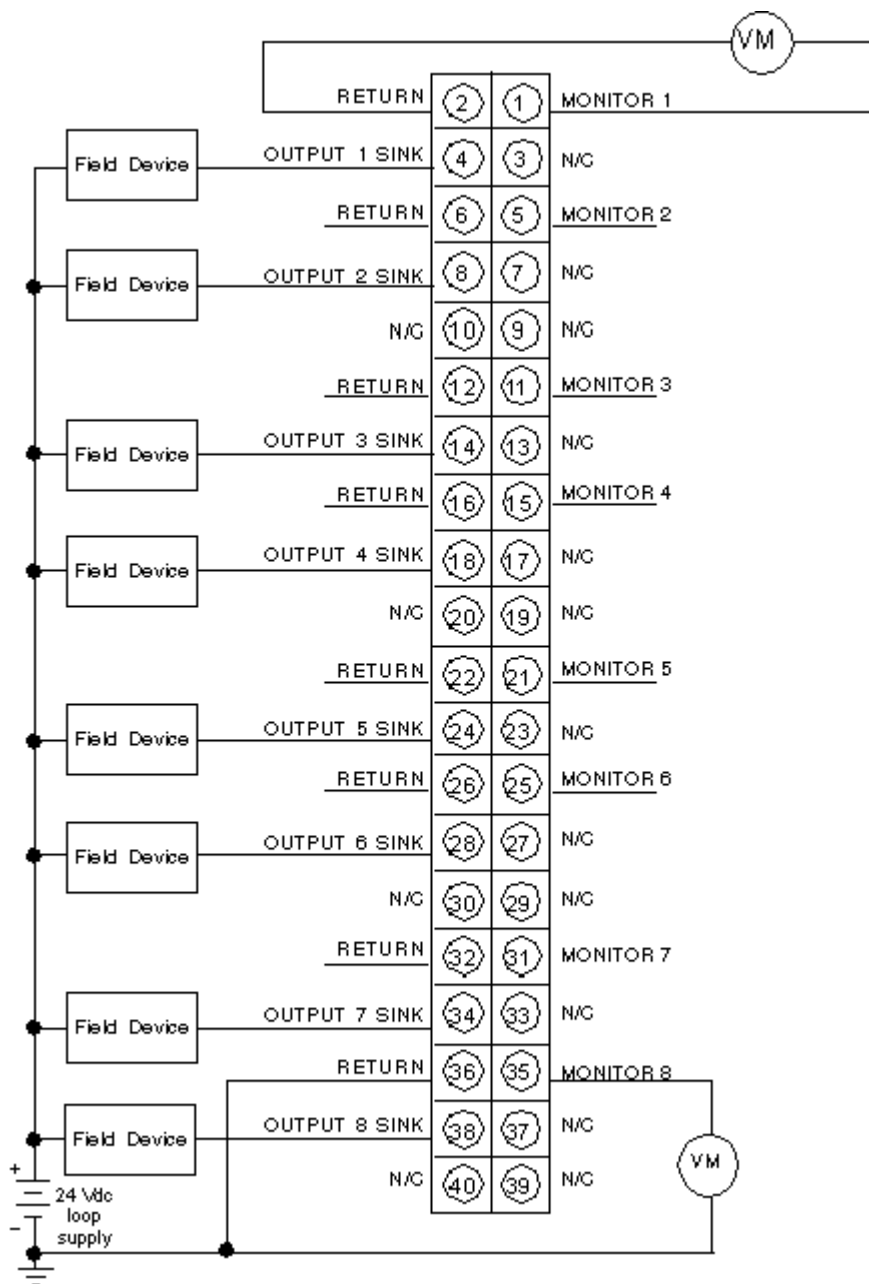

N/C Not Connected

All terminals labeled "RETURN" are common inside the module.