

Product datasheet

Specifications



sub-base - soldered solid state output relay ABE7 - 16 outputs - 0.5 A

Local distributor code:
402703714

ABE7S16S1B2

EAN Code: 3389110838862

Main

Range of product	Modicon ABE7
Product or component type	Solid state output relay sub-base
[Us] rated supply voltage	24 V DC for PLC end 24 V DC for preactuator end
Number of channels	16
Relay type	Soldered solid state relay

Complementary

Terminal block type	Removable
Isolation PLC/operative part	No
Fixing mode	By clips (35 mm symmetrical DIN rail) By screws (solid plate with fixing kit)
Current state 0 guaranteed	0.4 mA (PLC end)
Voltage state 0 guaranteed	3.4 V for PLC end
Current state 1 guaranteed	3.1 mA (PLC end)
Voltage state 1 guaranteed	16.9 V for PLC end
Maximum current per output common	9 A
Current per channel	0.5 A for preactuator end
Minimum switching current	1 mA
Drop-out voltage	0.3 V (preactuator end)
Maximum switching current	700 mA DC-12 700 mA DC-13
Maximum tungsten load	<10 W DC-6
Maximum residual current	0.5 mA preactuator end
Fault type	Short-circuit Overload
Fault indication	Without
Switchable inductive energy L/R	<= 400(U.I) ms
Maximum circuit breaker threshold	0.75 A
Response time	<= 0.1 ms from state 1 to 0 <= 0.2 ms from state 0 to 1
Switching frequency	< 0.6/LI ² Hz
Installation category	II conforming to IEC 60664-1

Tightening torque	0.6 N.m with flat Ø 3.5 mm screwdriver
Width	125 mm
Net weight	0.4 kg

Environment

Product certifications	GL UL DNV CSA EAC
IP degree of protection	IP2X conforming to IEC 60529
Protective treatment	TC
Resistance to incandescent wire	750 °C, extinction time <30 s conforming to IEC 60695-2-11
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Resistance to radiated fields	10 V/m (26000000...1000000000 Hz) conforming to IEC 61000-4-3 level 3
Resistance to fast transients	2 kV level 3 conforming to IEC 61000-4-4
Ambient air temperature for operation	-5...60 °C conforming to IEC 61131-2
Ambient air temperature for storage	-40...80 °C conforming to IEC 61131-2
Pollution degree	2 conforming to IEC 60664-1

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.1 cm
Package 1 Width	8.3 cm
Package 1 Length	13.6 cm
Package 1 Weight	343.0 g
Unit Type of Package 2	S02
Number of Units in Package 2	9
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	3.431 kg

Logistical informations

Country of origin	LV
--------------------------	----

Contractual warranty

Warranty	18 months
-----------------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint 1038

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard No

Packaging without single use plastic No

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number 1bbe7d20-74c0-4e7e-b98b-d2946f4ab8b4

REACH Regulation [REACH Declaration](#)

Use Again

Repack and remanufacture


End of life manual availability [End of Life Information](#)

Take-back No

WEEE Label  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings


Dimensions

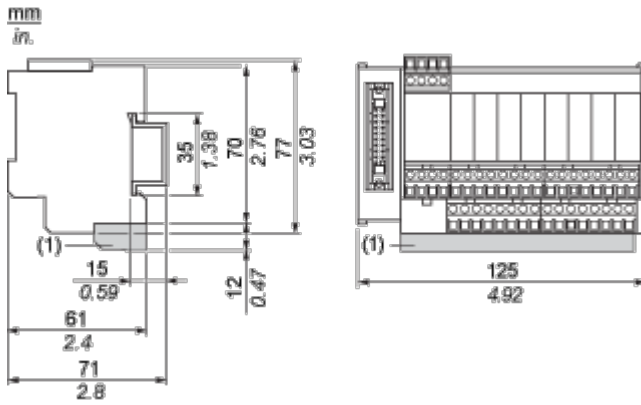

(1) ABE7BV20 / ABE7BV20E


Mounting and Clearance

Mounting

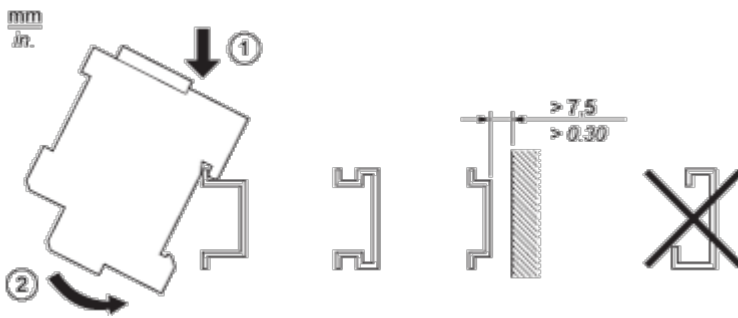


Connections and Schema

HE10 16 Channels

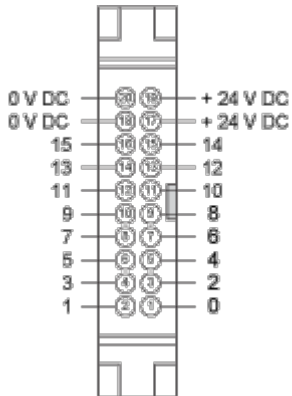

Wiring Diagram

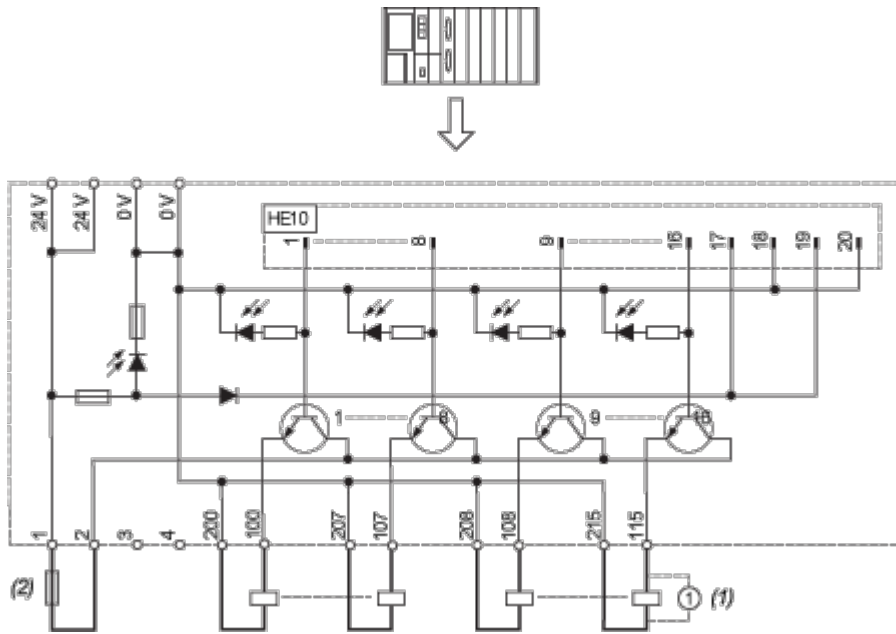


- (1) Inductive load
- (2) AB1FUSE435U5X + quick acting FUSE 5 x 20 type F.

Performance Curves

Curves for Determining Cable Type and Length According to the Current

16-channel Sub-base

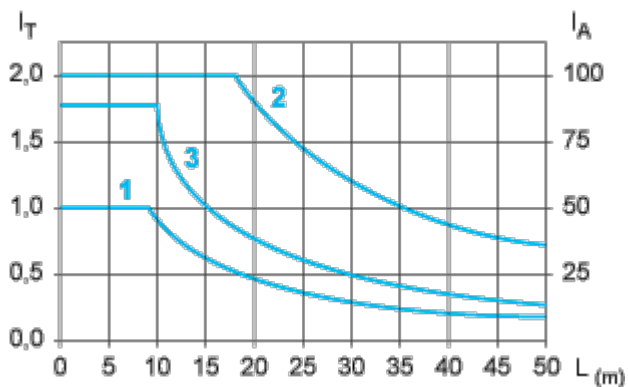

L Cable length

I_T Total current per sub base (A)

I_A Average current per channel (mA)

- (1) TSXCDP••2 and ABFH20H••0 cables with c.s.a. 0.08 mm² (AWG 28).
- (2) TSXCDP••3 cables with c.s.a. 0.34 mm² (AWG 22).
- (3) Cables with c.s.a. 0.13 mm² (AWG 26).

The curves are given for a voltage drop of 1 V in the cable. For n volts tolerance, multiply the length determined from the graph by n.