

# Product datasheet

Specifications



## processor module M340 - max 1024 discrete + 256 analog I/O - Modbus

Local distributor code:

393602571

BMXP342000

EAN Code: 3595863999266

## Main

Range of product	Modicon M340 automation platform
Product or component type	Processor module
Number of racks	1
Number of slots	11
Discrete I/O processor capacity	1024 I/O single-rack configuration
Analogue I/O processor capacity	256 I/O multi-rack configuration 66 I/O single-rack configuration
Number of application specific channel	36
Monitoring	Diagnostic counters Modbus Event counters Modbus

## Complementary

Control channels	Programmable loops
Integrated connection type	Non isolated serial link RJ45 character mode, transmission mode: asynchronous in baseband, RS232C, transmission mode: 2 twisted shielded pairs at 0.3...19.2 kbit/s full duplex Non isolated serial link RJ45 character mode, transmission mode: asynchronous in baseband, RS485, transmission mode: 1 twisted shielded pair at 0.3...19.2 kbit/s half duplex Non isolated serial link RJ45, master/slave Modbus, RTU/ASCII, transmission mode: asynchronous in baseband, RS232C, transmission mode: 1 twisted shielded pair at 0.3...19.2 kbit/s half duplex Non isolated serial link RJ45, master/slave Modbus, RTU/ASCII, transmission mode: asynchronous in baseband, RS485, transmission mode: 1 twisted shielded pair at 0.3...19.2 kbit/s half duplex USB port at 12 Mbit/s
Communication module processor capacity	2 Ethernet communication module 4 AS-Interface module
Number of devices per segment	0...32 (character mode) 0...32 (Modbus)
Number of devices	2 point-to-point character mode 2 point-to-point Modbus
Bus length	0...10 m serial link non isolated character mode segment 0...10 m serial link non isolated Modbus segment 0...1000 m serial link isolated character mode segment 0...1000 m serial link isolated Modbus segment 0...15 m character mode point-to-point 0...15 m Modbus point-to-point
Maximum tap links length	<15 m serial link non isolated character mode segment <15 m serial link non isolated Modbus segment <40 m serial link isolated character mode segment <40 m serial link isolated Modbus segment
Number of addresses	0...248 for character mode 0...248 for Modbus

<b>Requests</b>	1 K data bytes per request character mode 252 data bytes per RTU request Modbus 504 data bytes per ASCII request Modbus
<b>Control parameter</b>	One CRC on each frame (RTU) Modbus One LRC on each frame (ASCII) character mode One LRC on each frame (ASCII) Modbus
<b>Memory description</b>	Internal RAM 4096 kB Internal RAM 256 kB data Internal RAM 3584 kB program constants and symbols Supplied memory card (BMXRMS008MP) backup of programs, constants, symbols and data
<b>Maximum size of object areas</b>	128 kB unlocated internal data 16250 %Mi located internal bits 32464 %MWi internal words located internal data 32760 %KWi constant words located internal data
<b>Default size of object areas</b>	128 %KWi constant words located internal data 256 %Mi located internal bits 512 %MWi internal words located internal data
<b>Application structure</b>	1 cyclic/periodic master task 1 periodic fast task No auxiliary task 32 event tasks
<b>Execution time per instruction</b>	0.18 µs Boolean 0.26 µs double-length words 0.38 µs single-length words 1.74 µs floating points
<b>Number of instructions per ms</b>	4.2 Kinst/ms 65 % Boolean + 35 % fixed arithmetic 5.4 Kinst/ms 100 % Boolean
<b>System overhead</b>	0.2 ms for fast task 1.05 ms for master task
<b>Current consumption</b>	72 mA at 24 V DC
<b>Supply</b>	Internal power supply via rack
<b>Marking</b>	CE
<b>Status LED</b>	1 LED (green) processor running (RUN) 1 LED (red) I/O module fault (I/O) 1 LED (red) memory card fault (CARD ERR) 1 LED (red) processor or system fault (ERR) 1 LED (yellow) activity on Modbus (SER COM)
<b>Net weight</b>	0.2 kg

## Environment

<b>Ambient air temperature for operation</b>	0...60 °C
<b>Relative humidity</b>	10...95 % without condensation
<b>IP degree of protection</b>	IP20
<b>Protective treatment</b>	TC
<b>Directives</b>	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility
<b>Product certifications</b>	CE UL CSA RCM EAC Merchant Navy

<b>Standards</b>	EN 61131-2 EN/IEC 61010-2-201 UL 61010-2-201 CSA C22.2 No 61010-2-201 IACS E10 EN/IEC 61000-6-5, interface type 1 and type 2 EN/IEC 61850-3, location G
<b>Environmental characteristic</b>	Hazardous location class I division 2

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	5.5 cm
<b>Package 1 Width</b>	11.0 cm
<b>Package 1 Length</b>	11.5 cm
<b>Package 1 Weight</b>	240.0 g
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	15
<b>Package 2 Height</b>	15.0 cm
<b>Package 2 Width</b>	30.0 cm
<b>Package 2 Length</b>	40.0 cm
<b>Package 2 Weight</b>	3.915 kg

## Logistical informations

<b>Country of origin</b>	FR
--------------------------	----

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Total lifecycle Carbon footprint 94

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation [REACH Declaration](#)

## Use Again

### Repack and remanufacture

End of life manual availability [End of Life Information](#)


Take-back No

Dimensions Drawings

Modules Mounted on Racks

---

Dimensions

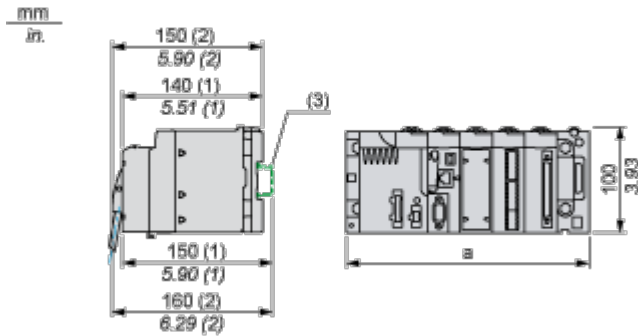

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Image of product / Alternate images

Alternative

---

