

Product datasheet

Specifications



TeSys GV2 & GV3 - auxiliary contact - 1 NO + 1 NC

Local distributor code:

381798251

GVAE11

EAN Code: 3389110343434

Main

Range	TeSys TeSys Deca
Device short name	GVAE
Product or component type	Auxiliary contact block
Product compatibility	GV2P GV2RT GV2ME GV3L GV2LE GV3P GV2L
Mounting location	Front side
Pole contact composition	1 NO + 1 NC
Quantity per set	Set of 10

Complementary

[Ui] rated insulation voltage	300 V conforming to UL 508 300 V conforming to CSA C22.2 No 14 250 V conforming to IEC 60947-1
[Ue] rated operational voltage	24...240 V AC 24...60 V DC
[Ith] conventional free air thermal current	2.5 A
Mechanical durability	100000 cycles
Minimum switching current	5 mA
Minimum switching voltage	17 V
Protection type	GG fuse 10 A GB2CB06 circuit breaker 10 A
Rated operational power in VA	120 VA at 110...120 V AC-15 - electrical durability: 100000 cycles 120 VA at 230...240 V AC-15 - electrical durability: 100000 cycles 48 VA at 24 V AC-15 - electrical durability: 100000 cycles 60 VA at 48 V AC-15 - electrical durability: 100000 cycles
Rated operational power in W	15 W at 48 V DC-13 - electrical durability: 100000 cycles 24 W at 24 V DC-13 - electrical durability: 100000 cycles 9 W at 60 V DC-13 - electrical durability: 100000 cycles
Tightening torque	1.4 N.m - on screw clamp terminals
Height	11 mm
Width	45 mm
Depth	29 mm
Net weight	0.02 kg

Environment

Environmental characteristic	Normal environment
Product certifications	UKCA

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.200 cm
Package 1 Width	6.000 cm
Package 1 Length	7.000 cm
Package 1 Weight	17.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	6.200 cm
Package 2 Width	12.000 cm
Package 2 Length	7.400 cm
Package 2 Weight	174.000 g
Unit Type of Package 3	S02
Number of Units in Package 3	220
Package 3 Height	15.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	4.123 kg

Logistical informations

Country of origin	CZ
-------------------	----

Contractual warranty

Warranty	18 months
----------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint 1

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic No

[EU RoHS Directive](#) Compliant

REACH Regulation [REACH Declaration](#)

Use Again

Repack and remanufacture

Recyclability potential, in % 42

End of life manual availability [End of Life Information](#)

Take-back No

WEEE Label  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Connections and Schema


GVAE11



Image of product / Alternate images

Alternative



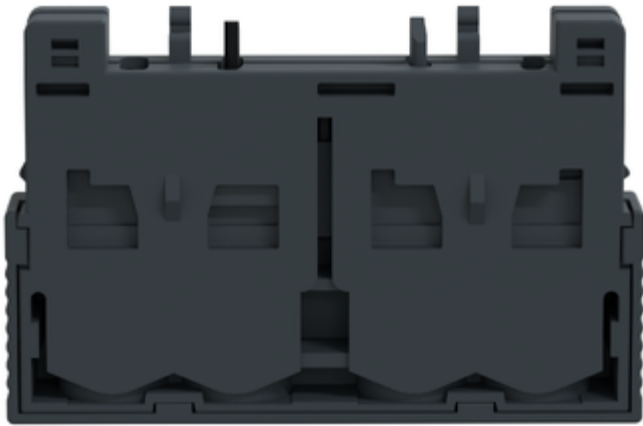

Technical Illustration

Assembly's dimensions

