

# Product datasheet

Specifications



## REVERSING CONTACTOR 575VAC 9A IEC

Local distributor code:

381822596

LC2D09BD

EAN Code: 3389110392081

### Main

<b>Range</b>	TeSys TeSys Deca
<b>Product name</b>	TeSys D TeSys Deca
<b>Product or component type</b>	Reversing contactor
<b>Device short name</b>	LC2D
<b>Contactors application</b>	Motor control Resistive load
<b>Utilisation category</b>	AC-3 AC-1 AC-3e
<b>Device presentation</b>	Preassembled with reversing power busbar
<b>Poles description</b>	3P
<b>power pole contact composition</b>	3 NO
<b>[Ue] rated operational voltage</b>	Power circuit: $\leq 690$ V AC 25...400 Hz Power circuit: $\leq 300$ V DC
<b>[Ie] rated operational current</b>	9 A (at $<60$ °C) at $\leq 440$ V AC AC-3 for power circuit 25 A (at $<60$ °C) at $\leq 440$ V AC AC-1 for power circuit
<b>Motor power kW</b>	2.2 kW at 220...230 V AC 50...60 Hz 4 kW at 380...400 V AC 50...60 Hz 4 kW at 415 V AC 50...60 Hz 4 kW at 440 V AC 50...60 Hz 5.5 kW at 500 V AC 50...60 Hz 5.5 kW at 660...690 V AC 50...60 Hz
<b>motor power HP (UL / CSA)</b>	0.5 hp at 115 V AC 60 Hz for 1 phase motors 1 hp at 230/240 V AC 60 Hz for 1 phase motors 2 hp at 200/208 V AC 60 Hz for 3 phases motors 2 hp at 230/240 V AC 60 Hz for 3 phases motors 5 hp at 460/480 V AC 60 Hz for 3 phases motors 7.5 hp at 575/600 V AC 60 Hz for 3 phases motors
<b>Control circuit type</b>	DC standard
<b>[Uc] control circuit voltage</b>	24 V DC
<b>Auxiliary contact composition</b>	1 NO + 1 NC
<b>[Uimp] rated impulse withstand voltage</b>	6 kV conforming to IEC 60947
<b>Overvoltage category</b>	III
<b>[Ith] conventional free air thermal current</b>	10 A (at $60$ °C) for signalling circuit 25 A (at $60$ °C) for power circuit
<b>Irms rated making capacity</b>	250 A at 440 V for power circuit conforming to IEC 60947 140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1
<b>Rated breaking capacity</b>	250 A at 440 V for power circuit conforming to IEC 60947

<b>[Icw] rated short-time withstand current</b>	30 A 40 °C - 10 min for power circuit 61 A 40 °C - 1 min for power circuit 105 A 40 °C - 10 s for power circuit 210 A 40 °C - 1 s for power circuit 100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit
<b>Associated fuse rating</b>	25 A gG at <= 690 V coordination type 1 for power circuit 20 A gG at <= 690 V coordination type 2 for power circuit 10 A gG for signalling circuit conforming to IEC 60947-5-1
<b>Average impedance</b>	2.5 mOhm - Ith 25 A 50 Hz for power circuit
<b>[Ui] rated insulation voltage</b>	Power circuit: 690 V conforming to IEC 60947-4-1 Power circuit: 600 V CSA certified Power circuit: 600 V UL certified Signalling circuit: 690 V conforming to IEC 60947-1 Signalling circuit: 600 V CSA certified Signalling circuit: 600 V UL certified
<b>Electrical durability</b>	0.6 Mcycles 25 A AC-1 at Ue <= 440 V 2 Mcycles 9 A AC-3 at Ue <= 440 V 2 Mcycles 9 A AC-3e at Ue <= 440 V
<b>Power dissipation per pole</b>	0.2 W AC-3 1.56 W AC-1 0.2 W AC-3e
<b>Front cover</b>	With
<b>Interlocking type</b>	Mechanical
<b>Mounting support</b>	Rail Plate
<b>Standards</b>	CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 60335-2-40:Annex JJ IEC 60335-1
<b>Product certifications</b>	DNV CSA CCC UL GL LROS (Lloyds register of shipping) BV RINA GOST UKCA
<b>Connections - terminals</b>	Power circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> flexible without cable end Power circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> flexible without cable end Power circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> flexible with cable end Power circuit: screw clamp terminals 2 cable(s) 1...2.5 mm <sup>2</sup> flexible with cable end Power circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> solid Power circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> solid Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> flexible without cable end Control circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> flexible without cable end Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> flexible with cable end Control circuit: screw clamp terminals 2 cable(s) 1...2.5 mm <sup>2</sup> flexible with cable end Control circuit: screw clamp terminals 1 cable(s) 1...4 mm <sup>2</sup> solid Control circuit: screw clamp terminals 2 cable(s) 1...4 mm <sup>2</sup> solid
<b>Tightening torque</b>	Power circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Power circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2 Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2 Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver pozidriv No 2 Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver pozidriv No 2
<b>Operating time</b>	53.55...72.45 ms closing 16...24 ms opening

<b>Safety reliability level</b>	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1
<b>Mechanical durability</b>	30 Mcycles
<b>Maximum operating rate</b>	3600 cyc/h 60 °C

## Complementary

<b>Coil technology</b>	Built-in bidirectional peak limiting diode suppressor
<b>Control circuit voltage limits</b>	0.1...0.25 Uc (-40...70 °C):drop-out DC 0.7...1.25 Uc (-40...60 °C):operational DC 1...1.25 Uc (60...70 °C):operational DC
<b>Time constant</b>	28 ms
<b>Inrush power in W</b>	5.4 W (at 20 °C)
<b>Hold-in power consumption in W</b>	5.4 W at 20 °C
<b>Auxiliary contacts type</b>	type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1 type mirror contact 1 NC conforming to IEC 60947-4-1
<b>Signalling circuit frequency</b>	25...400 Hz
<b>Minimum switching current</b>	5 mA for signalling circuit
<b>Minimum switching voltage</b>	17 V for signalling circuit
<b>Non-overlap time</b>	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
<b>Insulation resistance</b>	> 10 MOhm for signalling circuit

## Environment

<b>IP degree of protection</b>	IP20 front face conforming to IEC 60529
<b>Climatic withstand</b>	conforming to IACS E10 conforming to IEC 60947-1 Annex Q category D
<b>Protective treatment</b>	TH conforming to IEC 60068-2-30
<b>Pollution degree</b>	3
<b>Ambient air temperature for operation</b>	-40...60 °C 60...70 °C with derating
<b>Ambient air temperature for storage</b>	-60...80 °C
<b>Operating altitude</b>	0...3000 m
<b>Fire resistance</b>	850 °C conforming to IEC 60695-2-1
<b>Flame retardance</b>	V1 conforming to UL 94
<b>Mechanical robustness</b>	Vibrations contactor open: 2 Gn, 5...300 Hz Vibrations contactor closed: 4 Gn, 5...300 Hz Shocks contactor open: 10 Gn for 11 ms Shocks contactor closed: 15 Gn for 11 ms
<b>Height</b>	77 mm
<b>Width</b>	90 mm
<b>Depth</b>	95 mm
<b>Net weight</b>	1.017 kg

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1

Package 1 Height	11.500 cm
Package 1 Width	9.500 cm
Package 1 Length	14.000 cm
Package 1 Weight	1.125 kg
Unit Type of Package 2	S02
Number of Units in Package 2	6
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	7.027 kg
Unit Type of Package 3	P06
Number of Units in Package 3	96
Package 3 Height	75.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	124.356 kg

## Logistical informations

Country of origin	FR
-------------------	----

## Contractual warranty

Warranty	18 months
----------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Total lifecycle Carbon footprint 74

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#) Compliant with Exemptions

SCIP Number 50ae7612-fd2e-41e4-a369-50d0dea6e592

REACH Regulation [REACH Declaration](#)

PVC free Yes

## Use Again

### Repack and remanufacture

Recyclability potential, in % 75


End of life manual availability [End of Life Information](#)

Take-back No

WEEE Label  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

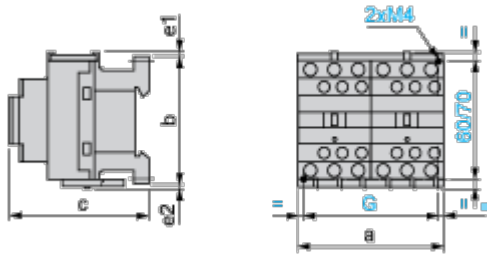

LC2 or 2 x LC1	a	b	c <sup>(1)</sup>	e1	e2	G
D09 to D18 (AC)	90	77	86	4	1.5	80
D093 to D123 (AC)	90	99	86	-	-	80
D09 to D18 (DC)	90	77	95	4	1.5	80
D093 to D123 (DC)	90	99	95	-	-	80
D25 to D38 (AC)	90	85	92	9	5	80
D183 to D383 (AC)	90	99	92	-	-	80
D25 to D32 (DC)	90	85	101	9	5	80
D183 to D383 (DC)	90	99	101	-	-	80
e1 and e2: including cabling.						
(1) With safety cover, without add-on block.						

Connections and Schema

Wiring

---



Technical Illustration

Assembly's dimensions

---

mm  
[in]

