


# Product datasheet

Specifications



## MOUNTING PLATE NSX/CVS/INS 250 HZ.FIXED TOGGLE

LVS03030

EAN Code: 3606481874481

### Main

<b>Range</b>	PrismaSeT
<b>Range of product</b>	PrismaSeT G
<b>Product or component type</b>	Mounting plate
<b>Accessory / separate part category</b>	Installation accessory
<b>Range compatibility</b>	PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT Pack 250 enclosure
<b>Installation description</b>	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Floor-standing enclosure - width 850 mm Floor-standing enclosure + duct - width 600 + 300 mm Wall-mounted enclosure + duct - width 600 + 300 mm Pack enclosure - width 600 mm
<b>Installed device</b>	EasyPact: fixed CVS100...160 without earth leakage protection - control: toggle - horizontal installation EasyPact: fixed CVS250 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed INS250 - control: direct front rotary handle - horizontal installation ComPact: fixed INV100 - control: direct front rotary handle - horizontal installation ComPact: fixed INV250 - control: direct front rotary handle - horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed INV160 - control: direct front rotary handle - horizontal installation ComPact: fixed INV200 - control: direct front rotary handle - horizontal installation
<b>Poles description</b>	1 x 3P: fixed CVS100...160 horizontal installation 1 x 4P: fixed CVS100...160 horizontal installation 1 x 3P: fixed CVS250 horizontal installation 1 x 4P: fixed CVS250 horizontal installation 1 x 3P: fixed INS250 horizontal installation 1 x 4P: fixed INS250 horizontal installation 1 x 3P: fixed INV100 horizontal installation 1 x 4P: fixed INV100 horizontal installation 1 x 3P: fixed INV250 horizontal installation 1 x 4P: fixed INV250 horizontal installation 1 x 3P: fixed NSX100...160 horizontal installation 1 x 4P: fixed NSX100...160 horizontal installation 1 x 3P: fixed NSX250 horizontal installation 1 x 4P: fixed NSX250 horizontal installation 1 x 3P: fixed INV160 horizontal installation 1 x 4P: fixed INV160 horizontal installation 1 x 3P: fixed INV200 horizontal installation 1 x 4P: fixed INV200 horizontal installation
<b>Condition of using cable tie</b>	Need additional plate (2M high) when installation of device is in horizontal

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications





---

4 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 850 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)

6 module(s): NSX100...160 without earth leakage protection , connection block in 600 mm WidePack enclosure (cable coming from top or bottom of enclosure)

6 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 600 mm WidePack enclosure (cable coming from top or bottom of enclosure)

5 module(s): NSX250 without earth leakage protection , connection block in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)

5 module(s): NSX250 without earth leakage protection , connection block in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)

4 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure)

4 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure)

5 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)

5 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)

5 module(s): NSX250 without earth leakage protection , connection block in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure)

5 module(s): NSX250 without earth leakage protection , connection block in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure)

5 module(s): NSX250 without earth leakage protection , connection block in 850 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)

4 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 850 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)

6 module(s): NSX250 without earth leakage protection , connection block in 600 mm WidePack enclosure (cable coming from top or bottom of enclosure)

6 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm WidePack enclosure (cable coming from top or bottom of enclosure)

<b>Standards</b>	IEC 61439-2
<b>Product certifications</b>	ASTA

## Complementary

<b>Cable entry</b>	Cut-out plates 0.33 mm top 92 mm Cut-out plates 0.31 mm top 42 mm Cut-out plates 0.31 mm bottom 42 mm Cut-out plates 0.35 mm top or bottom 142 mm
<b>Material</b>	Sheet steel
<b>Protective treatment</b>	Electrophoresis treatment and hot-polymerised polyester epoxy powder
<b>Surface finish</b>	Textured Matt
<b>Colour</b>	White (RAL 9003)
<b>Width</b>	600 mm
<b>Height</b>	200 mm
<b>Net weight</b>	1.16 kg













---

600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX250 without fixed toggle horizontal 3P 1 connection block 5 0.31 mm

600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX250 without fixed toggle horizontal 3P 1 connection block 5 0.31 mm

850 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle horizontal 3P 1 connection block 5 0.33 mm

850 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle horizontal 3P 1 connection block 5 0.31 mm

850 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm

600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.31 mm

600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.31 mm

600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX250 without fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm

600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX250 without fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm

600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.33 mm

600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.33 mm

600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 direct with long terminal shield 5 0.31 mm

600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 direct with long terminal shield 5 0.31 mm

600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 direct with long terminal shield 5 0.33 mm

600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 direct with long terminal shield 5 0.33 mm

600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.33 mm

600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.33 mm

600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.31 mm

600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.31 mm

850 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.33 mm

850 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 5 0.31 mm

850 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm

600 mm Prisma Pack 250 Pack enclosure ComPact NSX250 without fixed toggle horizontal 3P 1 connection block 6 0.35 mm

600 mm Prisma Pack 250 Pack enclosure ComPact NSX250 without fixed toggle horizontal 3P 1 direct with long terminal shield 6 0.35 mm

600 mm Prisma Pack 250 Pack enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 connection block 6 0.35 mm

600 mm Prisma Pack 250 Pack enclosure ComPact NSX250 without fixed toggle horizontal 4P 1 direct with long terminal shield 6 0.35 mm

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.500 cm
Package 1 Width	21.000 cm
Package 1 Length	47.600 cm
Package 1 Weight	1.097 kg
Unit Type of Package 2	CAR
Number of Units in Package 2	5
Package 2 Height	22.500 cm
Package 2 Width	32.000 cm
Package 2 Length	50.000 cm
Package 2 Weight	5.885 kg
Unit Type of Package 3	P12
Number of Units in Package 3	70
Package 3 Height	77.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	90.790 kg

## Logistical informations

Country of origin	IT
-------------------	----

## Contractual warranty

Warranty	18 months
----------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant with Exemptions

SCIP Number

4758f26b-dbf8-498a-a5c2-4de140d6aa9a

REACH Regulation

[REACH Declaration](#)

Halogen-free status

Halogen free plastic parts product

PVC free

Yes

Silicone-free

Yes

## Use Again

### Repack and remanufacture

End of life manual availability

No need of specific recycling operations


Take-back

No

Technical Illustration

Dimensions

---

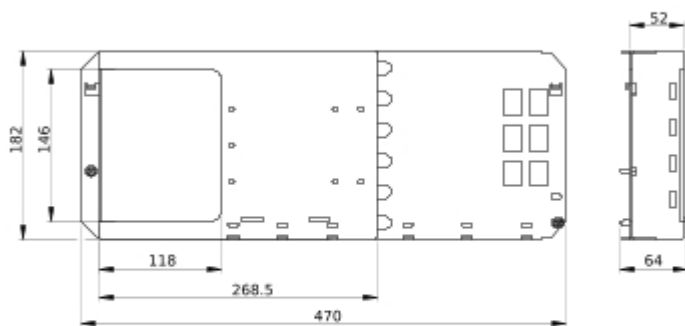

- All dimensions are approximate and are in mm  
- Also see technical documentation.