


Product datasheet

Specifications



MOUNTING PLATE NSX/CVS/VIGI/ INS 250 V. FIX.TOGGLE

LVS03050

EAN Code: 3606481874672

Main

Range	PrismaSeT
Range of product	PrismaSeT G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT Pack 250 duct PrismaSeT PrismaSeT G duct PrismaSeT PrismaSeT P cubicle
Installation description	Floor-standing duct - width 300 mm Wall-mounted duct - width 300 mm Cubicle - width 400 mm depth 400 mm Pack enclosure - width 300 mm
Installed device	EasyPact: fixed CVS100...160 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS250 without earth leakage protection - control: toggle - vertical installation ComPact: fixed INS250 - control: direct front rotary handle - vertical installation ComPact: fixed INV100 - control: direct front rotary handle - vertical installation ComPact: fixed INV160 - control: direct front rotary handle - vertical installation ComPact: fixed INV200 - control: direct front rotary handle - vertical installation ComPact: fixed INV250 - control: direct front rotary handle - vertical installation ComPact: fixed NSX100...160 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX250 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS100...160 with earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS250 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX100...160 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX250 with earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX250 without earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX100...160 with earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX250 with earth leakage protection - control: toggle - vertical installation

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Poles description

1 x 3P: fixed INS250 vertical installation
1 x 4P: fixed INS250 vertical installation
1 x 3P: fixed INV250 vertical installation
1 x 4P: fixed INV250 vertical installation
1 x 3P: fixed INV100 vertical installation
1 x 4P: fixed INV100 vertical installation
1 x 3P: fixed INV160 vertical installation
1 x 4P: fixed INV160 vertical installation
1 x 3P: fixed INV200 vertical installation
1 x 4P: fixed INV200 vertical installation
1 x 3P: fixed CVS100...160 vertical installation
1 x 4P: fixed CVS100...160 vertical installation
1 x 3P: fixed CVS250 vertical installation
1 x 4P: fixed CVS250 vertical installation
1 x 3P: fixed NSX100...160 vertical installation
1 x 4P: fixed NSX100...160 vertical installation
1 x 3P: plug-in NSX100...160 vertical installation
1 x 4P: plug-in NSX100...160 vertical installation
1 x 3P: fixed NSX250 vertical installation
1 x 4P: fixed NSX250 vertical installation
1 x 3P: plug-in NSX250 vertical installation
1 x 4P: plug-in NSX250 vertical installation

Condition of using cable tie

Need additional plate (1M high) when installation of device is in vertical

enclosure)

13 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 300 mm Widefloor-standing duct (cable coming from top or bottom of enclosure)

13 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 300 mm Widewall-mounted duct (cable coming from top or bottom of enclosure)

11 module(s): NSX250 with earth leakage protection , front connection in 400 mm Widecubicle

13 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 300 mm WidePack enclosure (cable coming from top or bottom of enclosure)

Standards	IEC 61439-2
Product certifications	ASTA

Complementary

Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	300 mm
Height	250 mm
Net weight	0.54 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.400 cm
Package 1 Width	14.100 cm
Package 1 Length	22.000 cm
Package 1 Weight	546.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	30
Package 2 Height	16.500 cm
Package 2 Width	51.000 cm
Package 2 Length	80.000 cm
Package 2 Weight	18.010 kg
Unit Type of Package 3	P12
Number of Units in Package 3	120
Package 3 Height	83.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	84.040 kg

Logistical informations

Country of origin	CZ
-------------------	----

Contractual warranty

Warranty	18 months
----------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard **Yes**

Packaging without single use plastic **No**

[EU RoHS Directive](#) **Compliant with Exemptions**

SCIP Number **4758f26b-dbf8-498a-a5c2-4de140d6aa9a**

REACH Regulation **[REACH Declaration](#)**

Halogen-free status **Halogen free plastic parts product**

PVC free **Yes**

Silicone-free **Yes**

Use Again


Repack and remanufacture

End of life manual availability **No need of specific recycling operations**

Take-back **No**

Technical Illustration

Dimensions

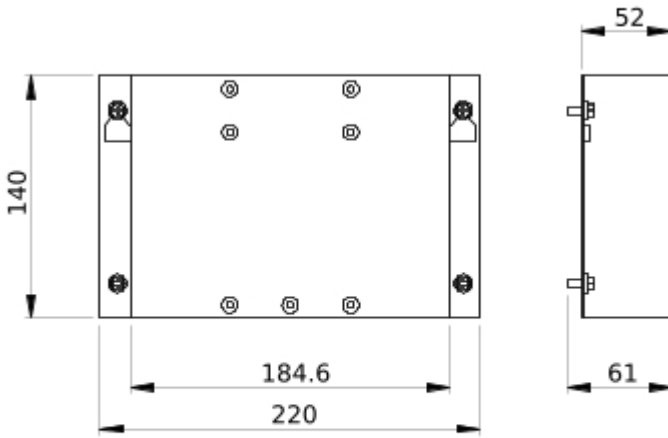

- All dimensions are approximate and are in
- Also see technical documentation.