


# Product datasheet

Specifications



## MOUNTING PLATE NSX/CVS/VIGI/ INS 630 V. FIX. TOGGLE

LVS03073

EAN Code: 3606481874702

### Main

<b>Range</b>	PrismaSeT
<b>Range of product</b>	PrismaSeT G
<b>Product or component type</b>	Mounting plate
<b>Accessory / separate part category</b>	Installation accessory
<b>Range compatibility</b>	PrismaSeT PrismaSeT G enclosure
<b>installation description</b>	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm
<b>Installed device</b>	EasyPact: fixed CVS400 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS630 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed EZC400 - control: toggle - vertical installation EasyPact: fixed EZC630 - control: toggle - vertical installation ComPact: fixed INS320...400 - control: direct front rotary handle - vertical installation ComPact: fixed INS500...630 - control: direct front rotary handle - vertical installation ComPact: fixed INV320...400 - control: direct front rotary handle - vertical installation ComPact: fixed INV500...630 - control: direct front rotary handle - vertical installation ComPact: fixed NSX400 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS400 with earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS630 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX400 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 with earth leakage protection - control: toggle - vertical installation
<b>Poles description</b>	1 x 3P: fixed CVS400 vertical installation 1 x 4P: fixed CVS400 vertical installation 1 x 3P: fixed CVS630 vertical installation 1 x 4P: fixed CVS630 vertical installation 1 x 3P: fixed EZC400 vertical installation 1 x 4P: fixed EZC400 vertical installation 1 x 3P: fixed EZC630 vertical installation 1 x 4P: fixed EZC630 vertical installation 1 x 3P: fixed INS320...400 vertical installation 1 x 4P: fixed INS320...400 vertical installation 1 x 3P: fixed INS500...630 vertical installation 1 x 4P: fixed INS500...630 vertical installation 1 x 3P: fixed INV320...400 vertical installation 1 x 4P: fixed INV320...400 vertical installation 1 x 3P: fixed INV500...630 vertical installation 1 x 4P: fixed INV500...630 vertical installation 1 x 3P: fixed NSX400 vertical installation 1 x 4P: fixed NSX400 vertical installation 1 x 3P: fixed NSX630 vertical installation 1 x 4P: fixed NSX630 vertical installation
<b>Condition of using cable tie</b>	Need additional plate (1M high) when installation of device is in vertical

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

<b>Number of vertical modules [50 mm]</b>	<p>12 module(s): CVS400 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>12 module(s): CVS400 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): CVS630 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): CVS630 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>12 module(s): EZC400, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>12 module(s): EZC400, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): EZC630, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): EZC630, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): INS320...400, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): INS320...400, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>12 module(s): INS500...630, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>12 module(s): INS500...630, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): INV320...400, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>10 module(s): INV320...400, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>12 module(s): INV500...630, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>12 module(s): INV500...630, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>12 module(s): NSX400 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>12 module(s): NSX400 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): NSX630 without earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>13 module(s): NSX630 without earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>14 module(s): CVS400 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>14 module(s): CVS400 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>15 module(s): CVS630 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>15 module(s): CVS630 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>14 module(s): NSX400 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>14 module(s): NSX400 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p> <p>15 module(s): NSX630 with earth leakage protection , direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)</p> <p>15 module(s): NSX630 with earth leakage protection , direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)</p>
<b>Standards</b>	IEC 61439-2
<b>Product certifications</b>	ASTA

## Complementary

<b>Cable entry</b>	Cut-out plates 0.311 mm top or bottom 300 mm Cut-out plates 0.39 mm top or bottom 225 mm Cut-out plates 0.313 mm top or bottom 325 mm Cut-out plates 0.314 mm top or bottom 350 mm
<b>Material</b>	Sheet steel
<b>Protective treatment</b>	Electrophoresis treatment and hot-polymerised polyester epoxy powder
<b>Surface finish</b>	Textured Matt
<b>Colour</b>	White (RAL 9003)
<b>Width</b>	600 mm
<b>Height</b>	300 mm
<b>Net weight</b>	2.64 kg



---

600 mm PrismaSeT G floor-standing enclosure EasyPact CVS400 with fixed toggle vertical 3P 1 direct with long terminal shield 14 0.314 mm  
600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS400 with fixed toggle vertical 3P 1 direct with long terminal shield 14 0.314 mm  
600 mm PrismaSeT G floor-standing enclosure EasyPact CVS400 with fixed toggle vertical 4P 1 direct with long terminal shield 14 0.314 mm  
600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS400 with fixed toggle vertical 4P 1 direct with long terminal shield 14 0.314 mm  
600 mm PrismaSeT G floor-standing enclosure EasyPact CVS630 with fixed toggle vertical 3P 1 direct with long terminal shield 15 0.314 mm  
600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS630 with fixed toggle vertical 3P 1 direct with long terminal shield 15 0.314 mm  
600 mm PrismaSeT G floor-standing enclosure EasyPact CVS630 with fixed toggle vertical 4P 1 direct with long terminal shield 15 0.314 mm  
600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS630 with fixed toggle vertical 4P 1 direct with long terminal shield 15 0.314 mm  
600 mm PrismaSeT G floor-standing enclosure ComPact NSX400 with fixed toggle vertical 3P 1 direct with long terminal shield 14 0.314 mm  
600 mm PrismaSeT G wall-mounted enclosure ComPact NSX400 with fixed toggle vertical 3P 1 direct with long terminal shield 14 0.314 mm  
600 mm PrismaSeT G floor-standing enclosure ComPact NSX400 with fixed toggle vertical 4P 1 direct with long terminal shield 14 0.314 mm  
600 mm PrismaSeT G wall-mounted enclosure ComPact NSX400 with fixed toggle vertical 4P 1 direct with long terminal shield 14 0.314 mm  
600 mm PrismaSeT G floor-standing enclosure ComPact NSX630 with fixed toggle vertical 3P 1 direct with long terminal shield 15 0.314 mm  
600 mm PrismaSeT G wall-mounted enclosure ComPact NSX630 with fixed toggle vertical 3P 1 direct with long terminal shield 15 0.314 mm  
600 mm PrismaSeT G floor-standing enclosure ComPact NSX630 with fixed toggle vertical 4P 1 direct with long terminal shield 15 0.314 mm  
600 mm PrismaSeT G wall-mounted enclosure ComPact NSX630 with fixed toggle vertical 4P 1 direct with long terminal shield 15 0.314 mm

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.500 cm
Package 1 Width	26.500 cm
Package 1 Length	47.500 cm
Package 1 Weight	2.481 kg
Unit Type of Package 2	S04
Number of Units in Package 2	5
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	13.105 kg
Unit Type of Package 3	P12
Number of Units in Package 3	60
Package 3 Height	103.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	162.860 kg

## Logistical informations

Country of origin	IT
-------------------	----

## Contractual warranty

Warranty	18 months
----------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard **Yes**

Packaging without single use plastic **No**

[EU RoHS Directive](#) **Compliant with Exemptions**

SCIP Number **4758f26b-dbf8-498a-a5c2-4de140d6aa9a**

REACH Regulation **[REACH Declaration](#)**

Halogen-free status **Halogen free plastic parts product**

PVC free **Yes**

Silicone-free **Yes**

## Use Again

### Repack and remanufacture


End of life manual availability **No need of specific recycling operations**

Take-back **No**

Technical Illustration

Dimensions

---

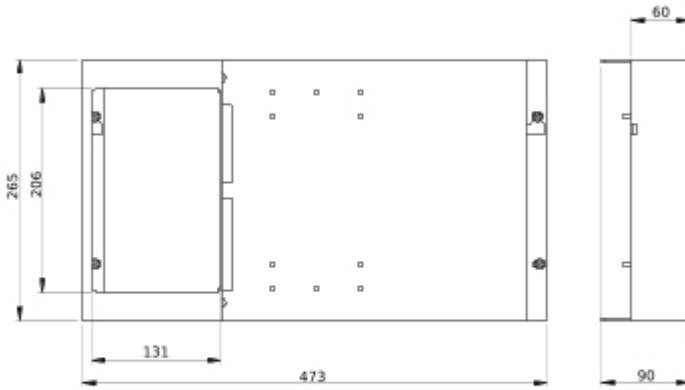

- All dimensions are approximate and are in mm  
- Also see technical documentation.