

Product datasheet

Specifications



ABS box IP66 IK07 RAL7035 Int.H105W105D55 Ext.H116W116D62 Opaque cover H10

Local distributor code:
387531166

NSYTBS11116

EAN Code: 3606480165252

Main

| | |
|---------------------|--|
| Range | PanelSeT |
| Device application | Multi-purpose |
| Category | Industrial box |
| Height | 116 mm |
| Width | 116 mm |
| Depth | 62 mm |
| Internal height | 105 mm |
| Internal width | 105 mm |
| Internal depth | 55 mm |
| Enclosure mounting | Wall mounted |
| Device composition | 1 body 1 cover 4 cover screw |
| Quantity per set | Set of 5 |
| Body type | One piece moulded |
| Type of front cover | Low plain cover |
| Cover fixing | Plastic screws |
| Lock type | Captive screw flat outside sealed area |
| Removable parts | Cover by captive screws |

Complementary

| | |
|-------------------------------------|--|
| Material | ABS with 45% of post-industrial recycled content |
| Colour | Grey (RAL 7035) |
| Standards | IEC 62208 |
| Product certifications | TÜV |
| Electrical insulation class | Class II |
| IP degree of protection | IP66 conforming to NEMA 4.4X |
| IK degree of protection | IK07 conforming to IEC 62262 |
| Glow wire resistance | 650 °C conforming to IEC 60695-2-11 |
| Ambient air temperature for storage | -15...40 °C |
| Operating temperature | -25...60 °C |
| Net weight | 0.151 kg |

Packing Units

| | |
|------------------------------|-----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 6.200 cm |
| Package 1 Width | 11.600 cm |
| Package 1 Length | 11.600 cm |
| Package 1 Weight | 149.000 g |
| Unit Type of Package 2 | BB1 |
| Number of Units in Package 2 | 5 |
| Package 2 Height | 12.200 cm |
| Package 2 Width | 12.500 cm |
| Package 2 Length | 33.100 cm |
| Package 2 Weight | 748.000 g |
| Unit Type of Package 3 | CAR |
| Number of Units in Package 3 | 75 |
| Package 3 Height | 40.000 cm |
| Package 3 Width | 40.000 cm |
| Package 3 Length | 60.000 cm |
| Package 3 Weight | 12.700 kg |

Logistical informations

| | |
|-------------------|----|
| Country of origin | HU |
|-------------------|----|

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint 1

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Average percentage of recycled plastic content 45 %

Packaging made with recycled cardboard No

Packaging without single use plastic No

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation [REACH Declaration](#)

Use Again

Repack and remanufacture

Recyclability potential, in % 0.4

End of life manual availability No need of specific recycling operations

Take-back No

Technical Illustration

Dimensions

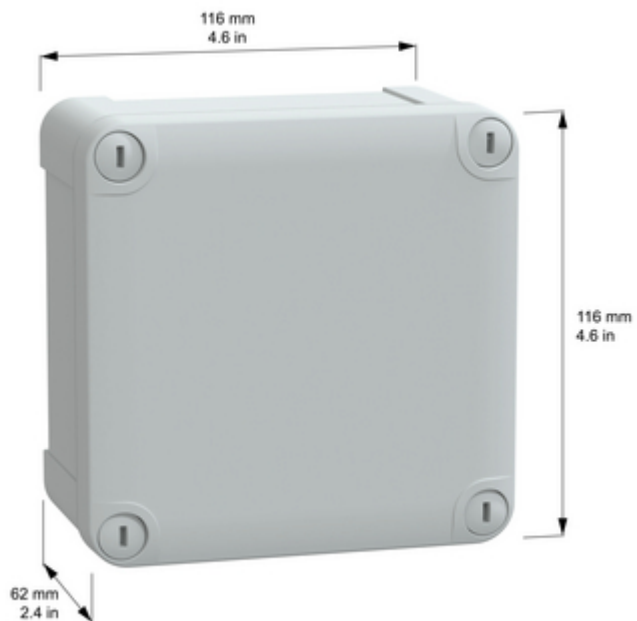


Image of product / Alternate images

Alternative

