

Product datasheet

Specifications



ABS box IP66 IK07 RAL7035 Int.H65W65D45 Ext.H74W74D56 Opaque cover H10

Local distributor code:

387531098

NSYTBS775

EAN Code: 3606480165207

Main

| | |
|---------------------|--|
| Range | PanelSeT |
| Device application | Multi-purpose |
| Category | Industrial box |
| Height | 74 mm |
| Width | 74 mm |
| Depth | 54 mm |
| Internal height | 65 mm |
| Internal width | 65 mm |
| Internal depth | 47 mm |
| Enclosure mounting | Wall mounted |
| Device composition | 1 body 1 cover 4 cover screw |
| Quantity per set | Set of 5 |
| Body type | One piece moulded |
| Type of front cover | Low plain cover |
| Cover fixing | Metal screws |
| Lock type | Captive screw flat outside sealed area |
| Removable parts | Cover by captive screws |

Complementary

| | |
|-------------------------------------|--|
| Material | ABS with 45% of post-industrial recycled content |
| Colour | Grey (RAL 7035) |
| Standards | IEC 62208 |
| Product certifications | TÜV |
| Electrical insulation class | Class II |
| IP degree of protection | IP66 conforming to NEMA 4.4X |
| IK degree of protection | IK07 conforming to IEC 62262 |
| Glow wire resistance | 650 °C conforming to IEC 60695-2-11 |
| Ambient air temperature for storage | -15...40 °C |
| Operating temperature | -25...60 °C |
| Net weight | 0.068 kg |

Packing Units

| | |
|------------------------------|------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 1.700 cm |
| Package 1 Width | 1.600 cm |
| Package 1 Length | 5.800 cm |
| Package 1 Weight | 74.000 g |
| Unit Type of Package 2 | CAR |
| Number of Units in Package 2 | 185 |
| Package 2 Height | 40.000 cm |
| Package 2 Width | 40.500 cm |
| Package 2 Length | 60.500 cm |
| Package 2 Weight | 15.190 kg |
| Unit Type of Package 3 | P12 |
| Number of Units in Package 3 | 2220 |
| Package 3 Height | 135.000 cm |
| Package 3 Width | 80.000 cm |
| Package 3 Length | 120.000 cm |
| Package 3 Weight | 195.000 kg |

Logistical informations

| | |
|-------------------|----|
| Country of origin | HU |
|-------------------|----|

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

| | |
|----------------------------------|---|
| Total lifecycle Carbon footprint | 1 |
|----------------------------------|---|

| | |
|--------------------------|---|
| Environmental Disclosure | Product Environmental Profile |
|--------------------------|---|

Use Better

Materials and Substances

| | |
|--|------|
| Average percentage of recycled plastic content | 45 % |
|--|------|

| | |
|--|----|
| Packaging made with recycled cardboard | No |
|--|----|

| | |
|--------------------------------------|----|
| Packaging without single use plastic | No |
|--------------------------------------|----|

| | |
|-----------------------------------|--|
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
|-----------------------------------|--|

| | |
|------------------|-----------------------------------|
| REACH Regulation | REACH Declaration |
|------------------|-----------------------------------|

Use Again

Repack and remanufacture

| | |
|-------------------------------|-----|
| Recyclability potential, in % | 0.4 |
|-------------------------------|-----|

| | |
|---------------------------------|--|
| End of life manual availability | No need of specific recycling operations |
|---------------------------------|--|

| | |
|-----------|----|
| Take-back | No |
|-----------|----|

Technical Illustration

Dimensions

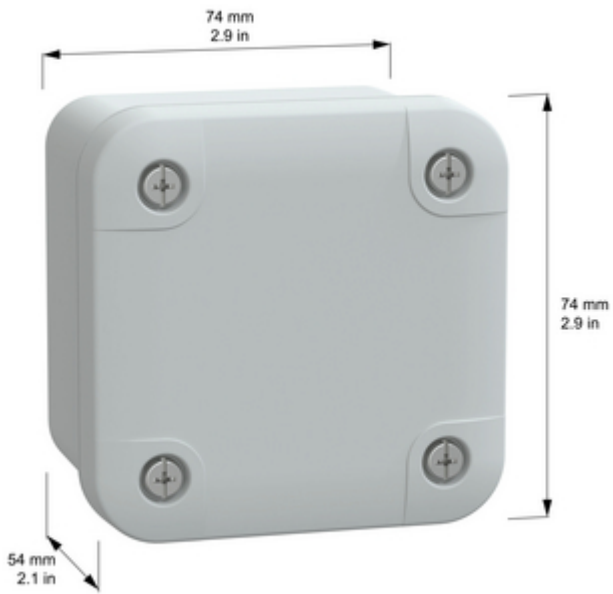


Image of product / Alternate images

Alternative

