

# Product datasheet

Specifications



Harmony, Control station key operated, surface mounting, key switch selector, 3 positions, stay put, 1 NO, marked UP ARROW - 0 - DOWN ARROW

XAPS11331N

EAN Code: 3389110838510

## Main

Range of product	Harmony XAPS
Product or component type	Key operated control station
Device short name	XAPS
Product mounting	Surface mounted
Control station composition	1 key selector switch, stay put 1 NO up arrow-O-down arrow marking
Operator position information	3 positions
Key withdrawal position	Center
Contact operation	Slow-break

## Complementary

Cable entry	1 knock-out for cable entry, clamping capacity: 17 mm 1 tapped entry for cable gland, clamping capacity: 12 mm
Net weight	0.85 kg
Connections - terminals	Screw clamp terminals, $\leq 2 \times 1.5 \text{ mm}^2$ with cable end conforming to IEC 60947-1 Screw clamp terminals, $\geq 1 \times 0.22 \text{ mm}^2$ without cable end conforming to IEC 60947-1
Number of command positions	1
Tightening torque	0.8...1.2 N.m conforming to IEC 60947-1
Shape of screw head	Cross compatible with Philips no 1 screwdriver Cross compatible with pozidriv No 1 screwdriver Slotted compatible with flat $\varnothing 4 \text{ mm}$ screwdriver Slotted compatible with flat $\varnothing 5.5 \text{ mm}$ screwdriver
Contacts material	Silver alloy (Ag/Ni)
Maximum resistance across terminals	25 MOhm
Short-circuit protection	10 A cartridge fuse type gG conforming to IEC 60947-5-1
Number of indicator lights	0
[Ith] conventional free air thermal current	10 A conforming to IEC 60947-5-1
[Ui] rated insulation voltage	600 V (pollution degree 3) conforming to IEC 60947-1
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-1
[Ie] rated operational current	3 A at 240 V, AC-15, A600 conforming to IEC 60947-5-1 6 A at 120 V, AC-15, A600 conforming to IEC 60947-5-1 0.1 A at 600 V, DC-13, Q600 conforming to IEC 60947-5-1 0.27 A at 250 V, DC-13, Q600 conforming to IEC 60947-5-1 0.55 A at 125 V, DC-13, Q600 conforming to IEC 60947-5-1 1.2 A at 600 V, AC-15, A600 conforming to IEC 60947-5-1

Compatibility code	XAPS
Number of push buttons	0
Number of selector switches	0
Number of key switches	1
Number of mushroom-shaped push-buttons	0
Number of contacts as normally closed contact	0
Number of contacts as normally open contact	0
Number of contacts as change-over contact	0

## Environment

Protective treatment	TC
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-25...70 °C
Electrical shock protection class	Class I conforming to IEC 60536
IP degree of protection	IP54 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262
Standards	IEC 60947-5-1

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.0 cm
Package 1 Width	8.0 cm
Package 1 Length	10.0 cm
Package 1 Weight	459.0 g
Unit Type of Package 2	S01
Number of Units in Package 2	8
Package 2 Height	15.0 cm
Package 2 Width	15.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	3.877 kg

## Logistical informations

Country of origin	CZ
-------------------	----

## Contractual warranty

Warranty	18 months
----------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Total lifecycle Carbon footprint	6
----------------------------------	---

Environmental Disclosure	<a href="#">Product Environmental Profile</a>
--------------------------	---

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
-----------------------------------	--

REACH Regulation	<a href="#">REACH Declaration</a>
------------------	-----------------------------------

## Use Again

### Repack and remanufacture


End of life manual availability	No need of specific recycling operations
---------------------------------	--

Take-back	No
-----------	----

Dimensions Drawings

Dimensions and Fixing

---

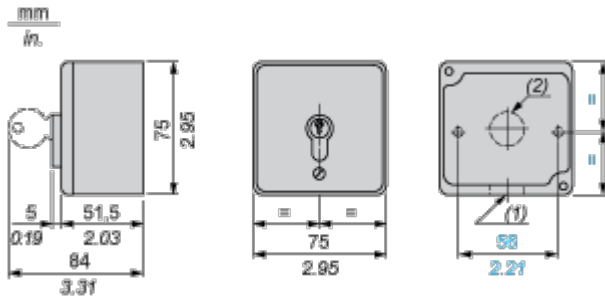

- (1) 1 tapped entry for 12 mm/0.47 in. maximum capacity cable gland.
- (2) Knock-out: cable entry through rear, Ø 17 mm/Ø 0.67 in.

Offer Marketing Illustration

Product benefits / Features

---

### Features XAP



- Empty stations for customer assembly with 1 to 10 holes depending on the model
- Metal offer for use in a wide range of environments
- Operating simplicity, flexibility, and robustness
- Full compatibility with Harmony XB4 or Harmony XB5 pushbutton ranges
- Pre-drilled or undrilled zinc or aluminium alloy enclosures

Offer Marketing Illustration

Product benefits / Features

---

### Technical Benefits XAP

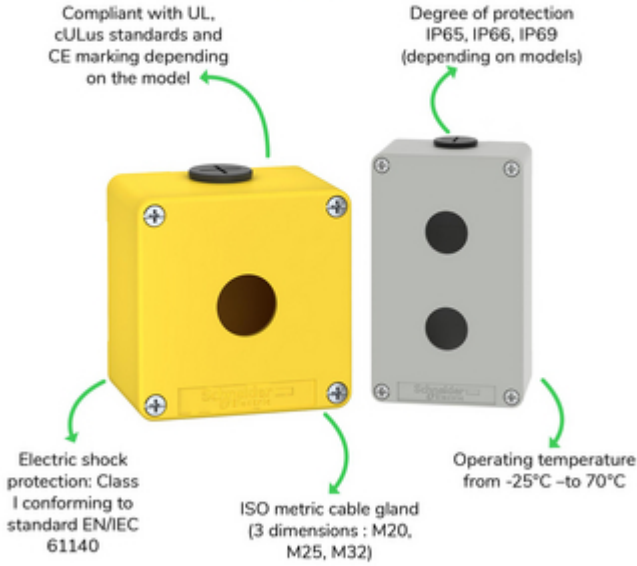


Image of product / Alternate images

Alternative

---





