

Product datasheet

Specifications



Fixing base for modular tower lights, plastic, Ø70, 380mm black aluminium support tube + black fixing plate

Local distributor code:
388814002

XVBZ03

! To be discontinued

! To be discontinued on: 31 Dec 2025

EAN Code: 3389110673616

Main

Range of product	Harmony XVB
Accessory / separate part designation	Fixing base
Product or component type	Fixing base
Accessory / separate part category	Mounting and fixing accessories
Accessory / separate part destination	Beacons and indicator banks Ø 70 mm

Complementary

Accessory / separate part type	Fixing base
Product compatibility	XVBC. XVBL.
Kit composition	Ø 25 mm aluminium support tube Black plastic fixing plate
Height under base unit	380 mm
Colour	Black aluminium
Net weight	0.2 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.500 cm
Package 1 Width	9.000 cm
Package 1 Length	39.500 cm
Package 1 Weight	181.000 g
Unit Type of Package 2	S04
Number of Units in Package 2	50
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	9.741 kg
Unit Type of Package 3	P06

Number of Units in Package 3	200
Package 3 Height	75.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	49.384 kg

Logistical informations

Country of origin	CZ
--------------------------	----

Contractual warranty

Warranty	18 months
-----------------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint 3

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation [REACH Declaration](#)

Use Again

Repack and remanufacture


Recyclability potential, in % 9

End of life manual availability [No need of specific recycling operations](#)

Take-back No

Dimensions Drawings


Dimensions and Mounting

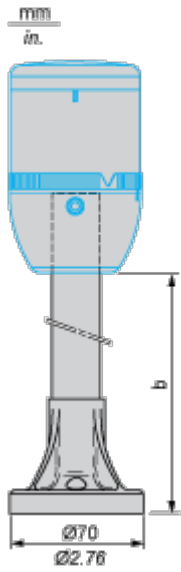

Height under base unit	
b in mm	b in in.
380	14.96


Mounting and Clearance

Panel Cut-Out



Technical Illustration

Dimensions

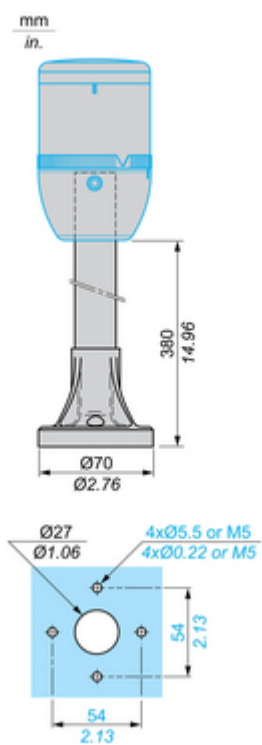

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XVB

Robust product performance with high IP protection and IK05 shock resistance



Conformity with International standards



Greater loudness up to 90dB with continuous and intermittent tones



Beacon lens on top with high intensity 5J, 10J Xenon flash, increase visibility from top and surrounding



Offer Marketing Illustration

Product benefits / Features

The infographic features a central image of two light fixtures: a tall, multi-colored lens unit and a shorter, single-colored unit. Surrounding this central image are five circular icons, each with a corresponding text block describing a feature. The background is a solid green color.

Features Harmony XVB

- Light Source:** 3 types of light source: 10-Watt incandescent bulb, built-in high-efficiency LEDs, 5 and 10-joule discharge tube
- Lifespan:** 100,000 hours of maintenance-free lighting thanks to "LED Protected" technology
- Protection:** High degree of protection (IP66) and Shock resistance (IK05)
- Flexibility:** Fully flexible and interchangeable construction of up to 5 lens units (six colors of light lens unit)
- Connector:** Connector with removable base, axial, or side cable entry, immediate assembly, and fixing using a locking ring

Image of product / Alternate images

Alternative





