

Product datasheet

Specifications



40mm Tower ROG Base Mount

Local distributor code:

403034806

XVC4B3K

EAN Code: 3606480032448

Main

Range of product	Harmony XVC4
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Sound signalling	Without
Mounting diameter	40 mm
Component name	XVC
Device short name	XVC
Light source	LED steady red LED steady or flashing orange LED steady or flashing green
Supply circuit type	AC/DC

Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover
Mounting location	On base
Product mounting	On base
[Us] rated supply voltage	24 V
[Us] rated supply voltage	24 V
Cable cross section	0.33 mm ²
AWG gauge	AWG 22
Cable length	500 mm
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	75 mA
Flashing frequency	1 Hz
Net weight	0.14 kg
Height	170.5 mm

Environment

Standards	IEC 61000-6-2 IEC 61000-6-3
Product certifications	UL

Protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
Electrical shock protection class	Class II conforming to IEC 61140
Overvoltage category	Class II conforming to IEC 61140
IP degree of protection	IP54 flat surface installation conforming to IEC 60529

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.4 cm
Package 1 Width	7.4 cm
Package 1 Length	46.7 cm
Package 1 Weight	306.0 g
Unit Type of Package 2	S04
Number of Units in Package 2	15
Package 2 Height	30.0 cm
Package 2 Width	40.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	6.042 kg

Logistical informations

Country of origin	ID
-------------------	----

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint	20
----------------------------------	----

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
----------------------------------------	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

Use Again

Repack and remanufacture


Take-back	No
-----------	----

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

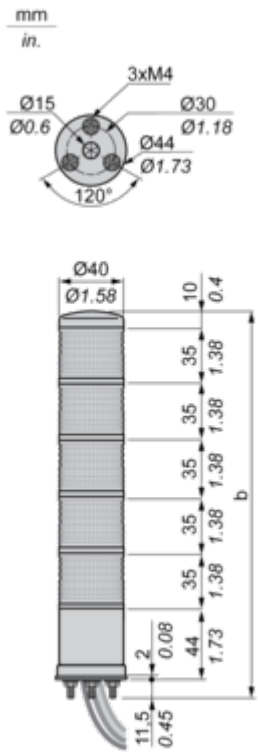


No. of illuminated units	b Without buzzer (mm)	b Without buzzer (in)
1 stage	100.50	3.96
2 stages	135.50	5.33
3 stages	170.50	6.71
4 stages	205.50	8.09
5 stages	240.50	9.47

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Direct Mounting on Horizontal Support

Panel cut-out



Technical Illustration

Dimensions

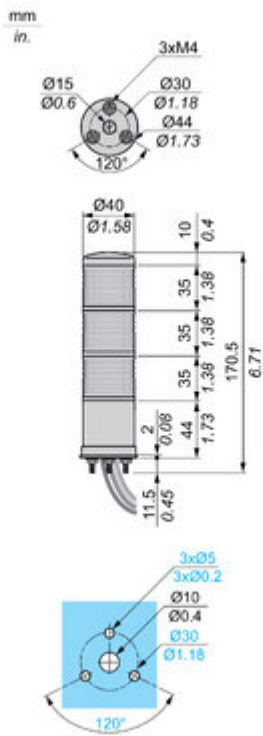


Image of product / Alternate images

Alternative





