

# Product datasheet

Specifications



## 60mm Tower RO Pole Buzzer Flash

Local distributor code:

403035669

XVC6B25S

⚠ Discontinued on: 28 Jul 2023

EAN Code: 3606480032653

⚠ Discontinued

### Main

Range of product	Harmony XVC6
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	2 illuminated units
Sound signalling	Buzzer
Mounting diameter	60 mm
Component name	XVC
Light source	LED steady or flashing red LED steady or flashing orange
[Us] rated supply voltage	24 V
Supply circuit type	AC/DC
Noise level	70...85 dB (continuous or intermittent tone) at 1 m

### Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover STK (chromium-plated): support tube
Product mounting	On support tube, 22 mm
Cable cross section	0.33 mm <sup>2</sup>
AWG gauge	AWG 22
Cable length	550 mm
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	90 mA
Fundamental frequency	2.23 kHz
Flashing frequency	1 Hz
Net weight	0.94 kg
Height	523.1 mm

### Environment

Standards	IEC 61000-6-3 IEC 61000-6-4 IEC 61000-6-2
-----------	---

<b>Product certifications</b>	UL
<b>Protective treatment</b>	TC
<b>Ambient air temperature for storage</b>	-35...70 °C
<b>Ambient air temperature for operation</b>	-10...50 °C
<b>Electrical shock protection class</b>	Class I conforming to IEC 61140
<b>IP degree of protection</b>	IP23 vertical surface installation conforming to IEC 60529

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	8.500 cm
<b>Package 1 Width</b>	8.500 cm
<b>Package 1 Length</b>	77.500 cm
<b>Package 1 Weight</b>	940.000 g
<b>Unit Type of Package 2</b>	BB1
<b>Number of Units in Package 2</b>	10
<b>Package 2 Height</b>	21.000 cm
<b>Package 2 Width</b>	46.000 cm
<b>Package 2 Length</b>	79.000 cm
<b>Package 2 Weight</b>	10.705 kg
<b>Unit Type of Package 3</b>	P06
<b>Number of Units in Package 3</b>	20
<b>Package 3 Height</b>	75.000 cm
<b>Package 3 Width</b>	60.000 cm
<b>Package 3 Length</b>	80.000 cm
<b>Package 3 Weight</b>	29.910 kg

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------


## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Better


 <b>Materials and Substances</b>	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)

Dimensions Drawings

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b1 dimension.

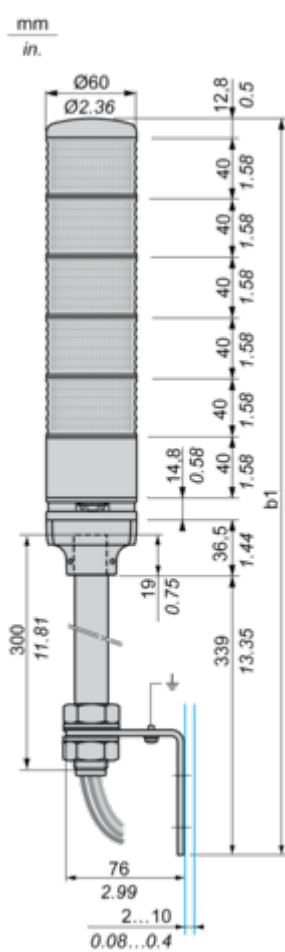

No. of illuminated units	b1 With buzzer (mm)	b1 With buzzer (in.)
1 stage	483.1	19.02
2 stages	523.1	20.59
3 stages	563.1	22.17
4 stages	603.1	23.74
5 stages	643.1	25.32

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

---

Support Tube Mounting

