



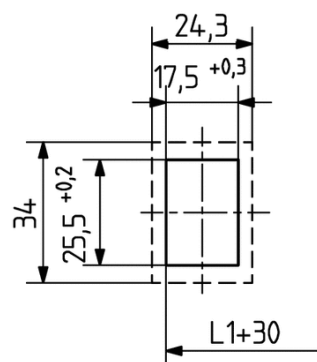

Technology for Light

Lampholder Water and Dustproof

27.241.U301.81

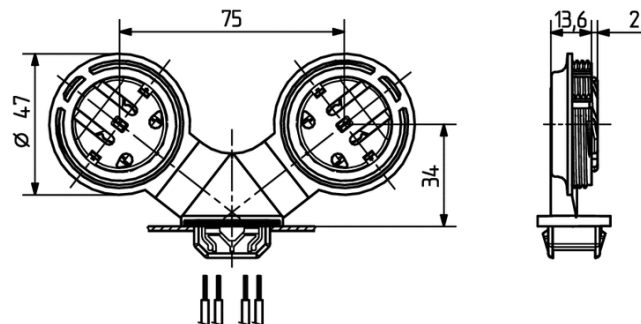

T 140



0,5 - 1,0 mm²



1,4 - 2,0

IP
65/67



Technology for Light

Lampholder Water and Dustproof

27.241.U301.81

DESCRIPTION

Max. permissible temperature at front of face plate (T):140°C

Max. permissible temperature at the rear of the lampholder (Tm): 110° C

Quick and easy wiring achieved by tapered wiring channels

Tensile interior of lampholder provides a lamp length tolerance compensation of 3 mm per pair of lampholders

Suitable gaskets: 27.240.-703 u. 27.240.-707

| | |
|------------------------------------|--------------------------------|
| Product name: | Lampholder Water and Dustproof |
| Mounting method 1: | Snap-in foot 25.5 x 17.5 mm |
| Lamp center: | 34 |
| Material: | Housing: PC Rotor: PBT |
| T-Marking: | 140 |
| Protection class according to IEC: | IP 65/67 |
| Wiring: | through snap in foot |
| Material thickness: | 0.8 - 2.1 |
| Gasket: | Gasket: without foot gasket |
| Single- / twin lampholder: | Twin lampholder |
| Color: | white, grey |
| Weight: | 42 |
| Pkg.: | 100 |