



# MSR Hot Restrike

## MSR 575 HR 1CT/4

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General Information		Operating and Electrical	
Cap-Base	G22 [G22]	Power Consumption	575 W
Operating Position	UNIVERSAL [Any or Universal (U)]	Lamp Current (Nom)	6.75 A
Life to 50% Failures (Nom)	1,000 hour(s)		
Light Technical		Controls and Dimming	
Color Code	- [Not Specified]	Dimmable	Yes
Luminous Flux (Min)	43,200 lumen		
Luminous Flux	48,000 lumen	Product Data	
Chromaticity Coordinate X (Nom)	323	Full product code	871829122105000
Chromaticity Coordinate Y (Nom)	328	Order product name	MSR 575 HR 1CT/4
Correlated Color Temperature (Nom)	6000 K	Order code	928097705115
Luminous Efficacy (Rated) (Min)	75 lm/W	Numerator - Quantity Per Pack	1
Luminous Efficacy (rated) (Nom)	83 lm/W	Numerator - Packs per outer box	4
Color rendering index (CRI)	90	Material Nr. (12NC)	928097705115
		Full product name	MSR 575 HR 1CT/4
		EAN/UPC - Case	8718291221067

# MSR Hot Restrike

EAN/UPC - Product/Case


8718291221050

## Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 575	30 mm	7.0	69 mm	71 mm	70	145 mm	43 mm	42	41 mm
HR 1CT/4		mm			mm			mm	

## Photometric data

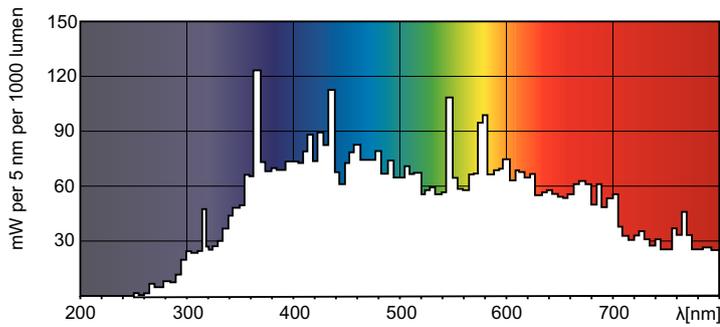

Spectral Power Distribution Colour - MSR 575 HR 1CT/4

